


# DIGITUS Fttx Installation Kit, Pre-assembled, 4-Core, LC/APC connector, 70m

DN-948070

EAN 4016032494577

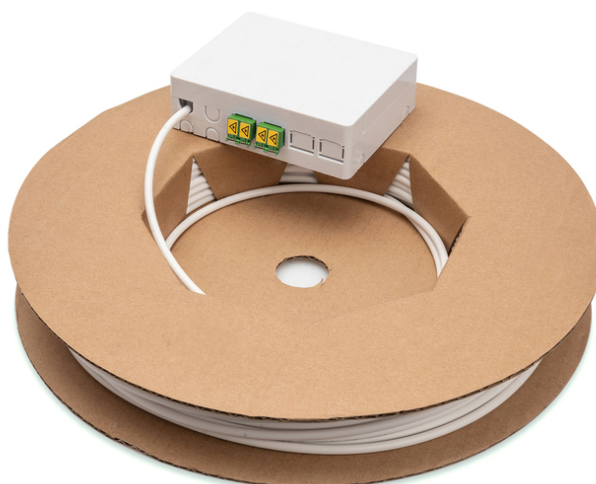

## Fttx - Installation Kit, 4-Core, LC connector 70 m, APC, NE4

The growing requirement for extending Fiber networks into the home demands products that enable an easy and efficient installation to realize the network. The Digitus FTTH installation kit solution offers the possibility to easily extend and complete the fiber network inside the home. The easiness of installation comes from the fact that the product is delivered with all required components negating the requirement to individually look for components to make the installation. The termination outlet can be mounted at the designated location and making the connection to router is made easier as the LC/APC connectors are already included. The included fiber drop cable can then be pulled to make the connection to house transfer point which is mounted in building as the entry point for fiber network. It offers additional ports and splice options to meet requirement for scaling up the number of fiber connections.

**The compact FTTH kit with preassembled fiber optic laying cable on one side is ideal for the installation of high-speed fiber optic connections within the house for the designated network level 4. The fiber optic laying cable is contained in a roll of cardboard, the pigtails are already mounted in the termination box and ready for connection.**

- FTTH Wall Outlet :

- Termination box for FTTH applications
- 2x LC-APC duplex fiber optic coupler with shutter
- Coupler shutter ensures laser protection and dust protection
- Adapter Type : LC/APC Duplex
- Adapter Capacity : 4 pcs
- Dimensions (H\*W\*D) : 100 \* 80 \* 30 mm
- Color : White
- Weight : 75 g
- Working Temperature : -40 - + 65 C
- Material: ABS
- FTTH Dropcable :
- 4 fibers 9/125µm G.657A2 bend optimized
- 900µm buffer, easily removable
- Aramid strain relief
- LSOH outer jacket, color white
- Cable construction: I/A-V(Q(ZN))H
- Short term Tensile strength : 200 N
- Operation Temperature : 0 - +70C

## Package contents

- Fttx Installation Kit, Pre-assembled, 4-Core, LC/APC connector, 70m
- Mounting accessories (screws and bolts)

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	9	11.36	42.00	41.00	30.00	51,660.00
Packaging Unit Inside	1	1.26	5.50	25.00	25.50	3,506.25
Packaging Unit Single	1	1.26	0.00	0.00	0.00	0.00
Net single without Packaging	0	1.00	0.00	0.00	0.00	0.00

**More images:**

