


Cabinets - Free Standing Network Cabinets

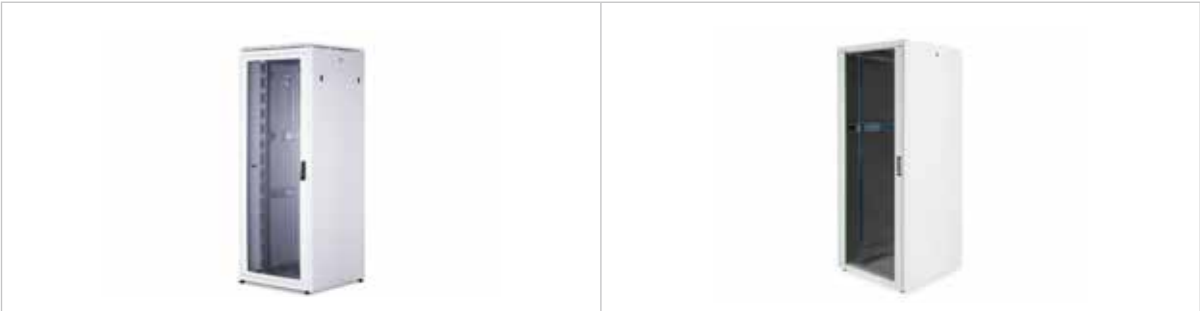

Part number (example)		DN-19 42U-8/8-1	DN-19 42U-8/8-D
Series		Unique	Dynamic Basic
Standard sizes	Height units (U)	22U, 26U, 32U, 36U, 42U, 47U	22U, 26U, 32U, 36U, 42U, 47U
	Width (mm)	600, 800	600, 800
	Depth (mm)	600, 800, 1000, 1200	600, 800, 1000, 1200
Shipping style	Shipping style	Mounted	Mounted
Front door	Style (800 mm width cabinets)	Complete steel frame with safety glass, single opening	Lateral steel struts with safety glass, single opening
	Style (600 mm width cabinets)	Lateral steel struts with safety glass, single opening	Lateral steel struts with safety glass, single opening
	Locking	Swivel handle with profile half cylinder lock, 333 locking	Swivel handle with round lock, 9473 locking
	Opening angle	120°	120°
Rear door	Style (800 mm width cabinets)	Steel door with cable entry brushes, double opening	Steel panel, single piece
	Style (600 mm width cabinets)	Steel door with cable entry brushes, single opening	Steel panel, single piece
	Locking	Round lock, 333 locking	Lock
	Opening angle	120°	⊗
Side panels	Side panels	Detachable with snap-in latches, lockable	Detachable, lockable
Fan area in roof	Fan area in roof	Special construction for fan unit installation	Punched-out holes
	Fan area cover	Top cover (lid) which can be unmounted	⊗
Montaż czteropunktowy VerVertical cable ducts (from 800 mm enclosure width)	Vertical cable ducts (from 800 mm enclosure width)	Installed in front (left & right)	⊗
Cable entry in base	Style (800 mm + 600 mm width cabinets)	Modular, openable base chassis with removable 19" blind panels incl. brush strip	Cut-out with screwed cover
	Style (800 mm width cabinets)	Additional cable entry brushes left & right	Additional punched out cable entries with plastic covers left & right
Cable entry in top	Style (800 mm + 600 mm width cabinets)	Cable brush left & right	Cable inlets with plastic cover left & right
Load capacity of 19" rails	Load capacity of 19" rails	1200 kg	600 kg