


# DIGITUS® Modular plugs for flat cable

A-MO 8/8 SF

EAN 4016032065159

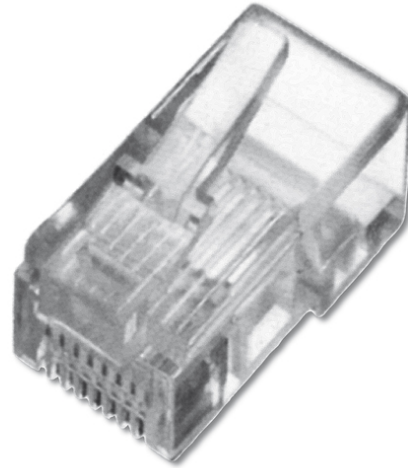

### Modular Plug, for Flat Cable, 8P8C unshielded, ASS 0512 CO

These modular plugs can be used to establish quick and simple connections.

- Layout performance: CAT 3, 1GBase-T
- Area of application: Patch cable assembly
- Norms: ISO/IEC 11801 3rd Ed., EN 50173-1, EIA/TIA 568-C
- General properties:
- UL certified
- Technical properties:

- Mating cycles female: > 750 acc. to ISO/IEC 11801, IEC 60603-7-5
- Material connector body: Polycarbonat, clear
- Connector contact: Phosphor bronze, brass 0.6 μ gold-plated
- Flammability: UL 94V-2
- Physical properties:
- Insertion force: ≈ 20N
- Diameter Cu-Conductor: AWG (27/7 ... 24/7)
- Operating temperature: -40 °C to +80 °C
- Current carrying capacity: 1A -1.5A at 50 °C

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	5000	9.30	41.30	39.00	19.50	31,408.70
Packaging Unit Inside	100	0.19	17.00	14.00	3.00	714.00
Packaging Unit Single	1	0.00	1.50	1.00	2.50	3.75
Net single without Packaging	1	0.00	1.50	1.00	2.50	0.00

### Safety notes

- Protect product from moisture
- Avoid antistatic charging when installing the product
- Observe the specifications of the raw cable manufacturer during installation

### EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH  
 Auf dem Schüffel 3  
 Lüdenscheid, Germany  
<https://www.assmann.com>  
[info@assmann.com](mailto:info@assmann.com)