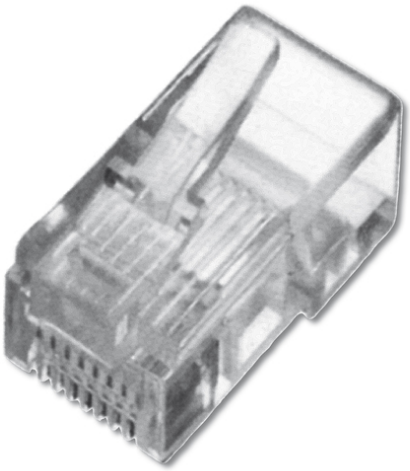

DIGITUS® □□□□□□□□□ □□□□□ □□□ □□□□□□□□ □□□□□□

A-MO 8/8 SF

EAN 4016032065159

Modular Plug, for Flat Cable, 8P8C unshielded, ASS 0512 CO

Эти модульные вилки могут использоваться для быстрого и простого подключения

- Общие свойства :
- сертификат UL
- Материал корпуса разъёма : прозрачный поликарбонат
- Физическое описание
- Усилие подключения : ⩽ 20 H
- Диаметр медного проводника : AWG (27/7 ... 24/7)

Logistics

	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	5000	9.30	41.30	39.00	19.50	31,408.70
Packaging Unit Inside	100	0.19	17.00	14.00	3.00	714.00
Packaging Unit Single	1	0.00	1.50	1.00	2.50	3.75
Net single without Packaging	1	0.00	1.50	1.00	2.50	0.00

Safety notes

- Protect product from moisture
- Avoid antistatic charging when installing the product
- Observe the specifications of the raw cable manufacturer during installation

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
Auf dem Schüffel 3
Lüdenscheid, Germany
https://www.assmann.com
info@assmann.com