

DIGITUS Socket strip with aluminum profile and back-up fuse, 9-way socket outlet with earthing contact, 2 m supply cable IEC C14 plug

DN-95437
EAN 4016032501640



1U Alu PDU, rackmount., 8x CEE 7/7 outlet, 1x outlet 10A Plug, 250VAC 50/60Hz, IEC C14 plug, pre-fuse

The DIGITUS® power strips are the perfect solution for your 482.6 mm (19") network or server cabinet. Optimized for cabinet mounting, the DIGITUS® power strips with 220-240V at 50-60 Hz offer you the best performance with a suitable load. The 482.6 mm (19") mounting material supplied ensures optimum attachment to the profile rails of your cabinets. Each socket strip can be mounted horizontally or vertically and, depending on the cabinet type, it is possible to mount the socket strip with the taps facing upwards or downwards.


Safe and professional power supply in the 482.6 mm (19") range

- 9x socket outlets with earthing contact 250VAC 50/60Hz / 10A / 2500W
- Aluminum profile
- 2x angle profiles for cabinet assembly
- 2 m supply cable H05VV-F 35 1.5 mm² with IEC C14 plug
- Plastic components made of ABS UL-94V-0
- Earthing on the aluminum profile
- Sockets with earthing contact rotated by 45
- Back-up fuse

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	10	9.30	19.50	52.00	29.50	29,913.00
Packaging Unit Inside	1	0.93	5.80	9.70	51.00	2,869.26
Packaging Unit Single	1	0.93	5.80	9.70	51.00	2,869.26
Net single without Packaging	1	0.75	4.50	4.50	48.30	0.00

More images:

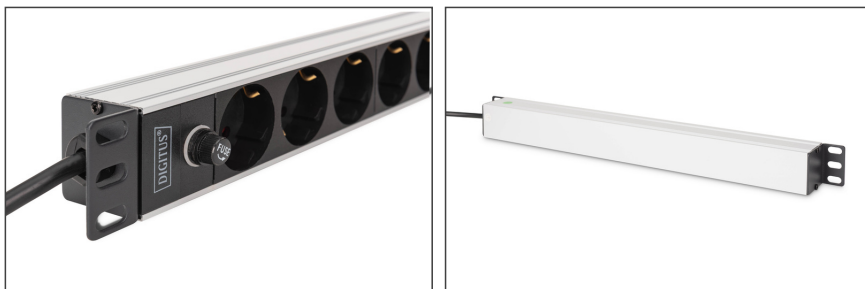

**Safety notes**

- This product is not intended for unsupervised use by children or persons under their care!
- Prevent higher humidity or temperatures than those specified in the data sheet - Avoid moisture, dust or vapors, solvents, flammable gases.
- Multiple sockets are not designed for permanent use with heavy loads!
- Multiple sockets must not be cascaded (avoid stringing together several multiple sockets).
- The maximum connected load must not be exceeded.
- Defective multiple sockets must be taken out of service immediately and disposed of in an environmentally friendly manner.
- In the event of a fault, take the product out of operation and contact a qualified electrician.
- Do not open the product.
- Disconnect the product from the power supply before cleaning. Do not use any aggressive or abrasive cleaning agents for cleaning.
- The ingress of liquids can lead to a short circuit.

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
Auf dem Schöffel 3
Lüdenscheid, Germany
<https://www.assmann.com>
info@assmann.com