

DIGITUS® Régua de tomadas de escritório de 3 vias com 2 ligações USB-A e 1 ligação USB-C, branco

DA-70626

EAN 4016032502074



Tomada de mesa de 3 vias, branca 3x tomada de corrente, 2x USB-A, 1xUSB-C, 3680W, 12W, 30W, 1,5m

Melhore o seu local de trabalho com esta prática tomada de secretária. Com o grampo de mesa fornecido, pode posicionar a extensão eléctrica individualmente na sua mesa. O cabo de alimentação de 1,5 metros e o design compacto da extensão eléctrica facilitam o seu posicionamento na maioria das configurações. Três tomadas de segurança fornecem energia aos seus dispositivos diretamente na sua secretária. A disposição a 45° permite a utilização de fichas maiores sem cobrir ou bloquear outras. Graças às três portas de carregamento USB, também pode carregar convenientemente os seus dispositivos móveis ou periféricos, quer sejam smartphones ou tablets. Com o obturador integrado e a maior proteção contra o toque das tomadas de segurança, o utilizador e as outras pessoas estão perfeitamente protegidos e podem trabalhar sem preocupações.

Extensão eléctrica de design com portas USB e montagem em mesa - ideal para estações de trabalho em casa ou no escritório

- Ligações:
- 3x tomadas de contacto de proteção
- 2x ligação USB-A 3.2 Gen 2 - 1x 12W (5V/2.4A), 1x 12W (5V/2.4A)
- 1x ligação USB-C 3.2 Gen 2 - 1x 30W (15V/2A)
- Fixação por grampo rotativo - fixação fácil sem parafusos

- Proteção contra curto-circuitos, sobreaquecimento e sobretensão
- Proteção contra sobreintensidades (com recuperação automática) - Evita danos devido a uma alimentação excessiva de corrente
- Cor do produto: Branco
- Caixa: Plástico (PC)
- Grau de proteção: IP20
- Cabo de alimentação: H05VV-F 3G1,5mm²
- Peso: 480 g
- Dimensões: C 20 x L 7 x A 6 cm
- Temperatura de funcionamento: 0°C - + 25°C
- Comprimento do cabo: 1,5 m
- Cor do cabo: Branco
- Corrente nominal / Tensão nominal : 16A / 250V
- Frequência: 50 Hz
- Estrutura: Espessura do tampo da mesa até 58 mm

Attributes

- Style: Outlet strip


Package contents

- 1x tomada de mesa de 3 vias, branca
- 1x braçadeira de fixação
- 1x QIG

Logistics

	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm ³
Packaging Unit Carton	10	7.00	17.00	52.00	44.50	39,338.00
Packaging Unit Inside	1	0.70	0.00	0.00	0.00	0.00
Packaging Unit Single	1	0.70	15.00	21.30	10.00	3,195.00
Net single without Packaging	1	0.59	7.00	20.00	5.00	0.00

More images:

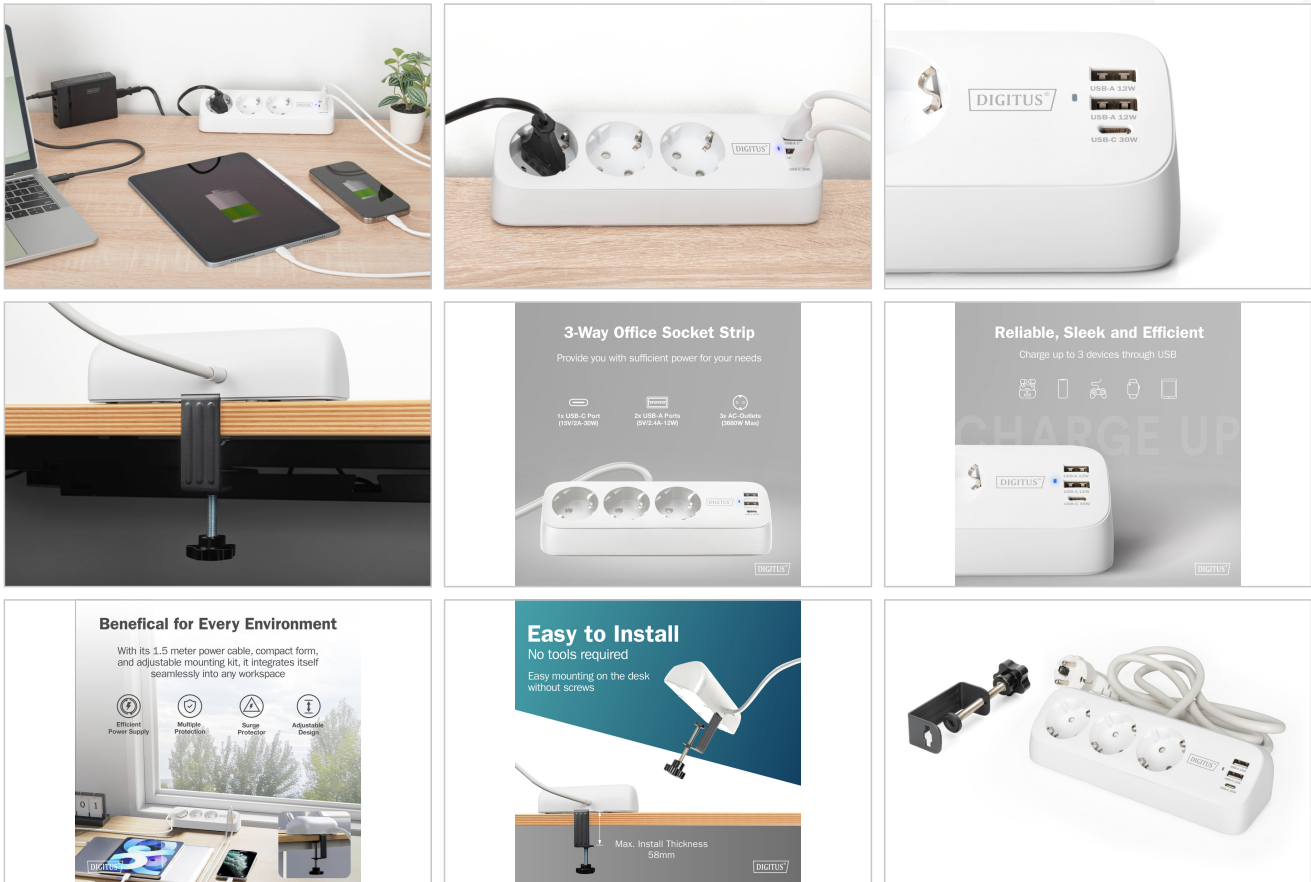

Safety notes

- Only operate the device indoors. Avoid exposure to moisture, dust, sunlight or other sources of heat.
- The socket outlet is part of the building installation. The relevant national standards and directives must be observed during planning and installation.
- The appliance may only be operated on the 230V/50 Hz AC mains supply. Work on the 230V mains may only be carried out by a qualified electrician certified in your country.
- Observe the applicable accident prevention regulations during installation.
- To avoid electric shock to the appliance, please disconnect the mains voltage (e.g. switch off the circuit breaker).
- Failure to observe the installation instructions may result in fire or other hazards.
- Installation may only be carried out in commercially available flush-mounted boxes (appliance boxes) in accordance with DIN 49073-1, with a minimum depth of 40 mm.
- When connecting to the device terminals, observe the permissible cables and cable cross-sections.
- Mandatory information in accordance with the appliance safety standard
- Note!
- Installation only by persons with relevant electrical knowledge and experience!
- Improper installation puts your own life and the lives of the users of the electrical system at risk.
- You risk serious damage to property if the installation is not carried out correctly. You may be personally liable for personal injury and damage to property.
- Specialist knowledge required for installation:
 - The following specialist knowledge in particular is required for installation:
 - The application of the 5 safety rules 1. Disconnect 2. Secure against reconnection 3. Ensure there is no voltage 4. Earth and short-circuit 5. Cover or isolate neighboring live parts.
 - Selection of suitable tools, measuring equipment and, if necessary, personal protective equipment.
 - Selection of the electrical installation material to ensure the switch-off conditions.
 - Check the electrical system after installation.
 - Observing the IP protection classes
 - Installation only with suitable electrical installation material
 - Check and observe the respective specifications of the type of supply network (TN system, TT system or IT system) and the resulting connection conditions (zeroing, protective earthing, or any additional measures required, etc.).
 - Maintenance and cleaning:
 - The socket is maintenance-free.
 - Leave repairs to a qualified electrician.
 - Only clean the device with a soft, clean, dry and lint-free cloth.
 - Do not use cleaning agents containing solvents. This can damage the plastic housing.

- Do not use wet cloths or sponges to clean the appliance.

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
Auf dem Schüffel 3
Lüdenscheid, Germany
<https://www.assmann.com>
info@assmann.com