DIGITUS® □□□□□□□□□□ □□□ □□□□□□□ LSA+

A-LSA-K

EAN 4016032132868



LSA-Plus Punch Down Tool with Sensor

LSA-Plus Punch Down Tool,with Sensor

- □□□□□ □□□□□□□□□:

- □□□□□□□□□□ □□□□□□□□□□□ □□□□ □□□□□□□□ LSA+
- □□□□□□□□□ □□□□□□□ □ □□□□□□□□ □□□□□□□□□□□□□ □□□□□□□ □□□□□□□
- □□□□□□□□□□□□□ □□□□□□□
- □□□□□□□□ □□□□□□□□□□□□ □□□□□□□□□□□□ □ □□□□□□□□□□□□□□□


Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	1	0.10	20.00	6.00	4.00	480.00
Packaging Unit Inside	1	0.10	20.00	6.00	4.00	480.00
Packaging Unit Single	1	0.10	20.00	6.00	4.00	480.00
Net single without Packaging	1	0.00	0.00	0.00	0.00	0.00


More images:







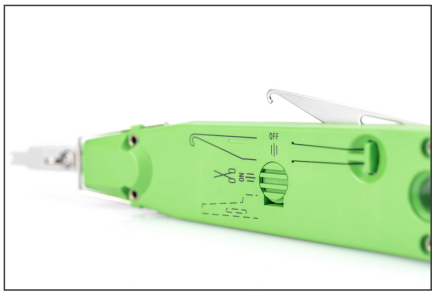

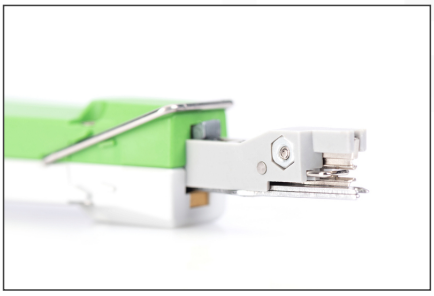





Safety notes

- Avoid using network test devices in damp or wet environments, as this can lead to short circuits or electric shocks.
- Only use the device in the specified operating temperature ranges and avoid extreme humidity.
- Never connect the tester to unauthorized sources or excessively high voltages. Overloading can damage the device or lead to dangerous situations.
- Check the respective tools for obvious defects before each use.
- Remove damaged hand tools from use immediately and repair them professionally or replace them if necessary.
- Clean tools after use.
- Store safely and clearly.

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
Auf dem Schüffel 3
Lüdenscheid, Germany
https://www.assmann.com
info@assmann.com