

# DIGITUS® Variable Notebook Stand with 7-Port Pop-Out USB-C™ Docking Station

DA-90440

EAN 4016032482291



## Notebook Riser with USB-C Hub 1x PD, 2x USB-A 3.0, 1x TF, 1x SD, 1x HDMI, 1x RJ-45

The variable notebook stand with 7-Port Pop-Out USB-C™ Docking Station from DIGITUS® combines ergonomics and connectivity. The stand can be rotated 360° and allows for individual angle adjustment. The docking station offers 7 ports to expand your notebook's connectivity - This can be taken out of the stand and used as an external peripheral device, whether on the go or for stationary use. All in all, the stand can be folded together completely (incl. dock) and is therefore also the perfect mobile companion as a whole.

### Ergonomics meets connectivity - Variable Notebook Stand with 7-Port Pop-Out USB-C™ Docking Station

- Foldable - Flexible use, whether stationary or on the go
- Variable stand (360° rotatable) for individual angle adjustment
- 7-Port Pop-Out USB-C™ Docking Station - The Docking Station can be removed and used as a standalone peripheral device
- Connections USB-C™ Dock:
  - 1 x USB-C™ (host) - USB 3.1 Gen 1
  - 1 x USB-C™ (PD 3.0) - 100 W max. power supply
- 1 x HDMI (4K/30Hz)
- 2 x USB-A - USB 3.0/5 Gbps data transfer
- 1 x RJ-45 - Gigabit Ethernet (10/100/1000) for connecting to the network/Internet


- 1 x microSD card reader
- 1 x SD card reader
- Integrated cable management on the underside- For stowing the USB-C™ connection cable (included).
- Elegant aluminum
- Dimensions: 26 (D) x 23.6 (W) x 2.6 (H) cm
- Weight: 500 g
- Color: Gray
- Manufacturer's notice:
  - Not all USB-C™ ports support all the features of the USB Type-C™ standard. Make sure that your notebook's USB-C™ port supports the DisplayPort Alternate Mode (DP Alt Mode) as well as USB Power Delivery (PD)
  - The video output capabilities depend on your notebook's graphics card and the connected monitor. Certain graphics cards have limited MST support while some screens also restrict the available resolution
  - The power adapter used should provide at least 100 watts to power a connected notebook as well as the Docking Station via the USB-C™ port

### Package contents

- Variable Notebook Stand with 7-Port Pop-Out USB-C™ Docking Station
- USB-C™ connection cable
- QIG

| Logistics                    |              |             |            |            |             |        |
|------------------------------|--------------|-------------|------------|------------|-------------|--------|
|                              | Number (pcs) | Weight (kg) | Depth (cm) | Width (cm) | Height (cm) | cm³    |
| Packaging Unit Carton        | 15           | 7.80        | 0.00       | 0.00       | 0.00        | 0.00   |
| Packaging Unit Inside        | 1            | 0.52        | 0.00       | 0.00       | 0.00        | 0.00   |
| Packaging Unit Single        | 1            | 0.52        | 0.00       | 0.00       | 0.00        | 0.00   |
| Net single without Packaging | 0            | 0.00        | 0.00       | 0.00       | 0.00        | 280.83 |

More images:

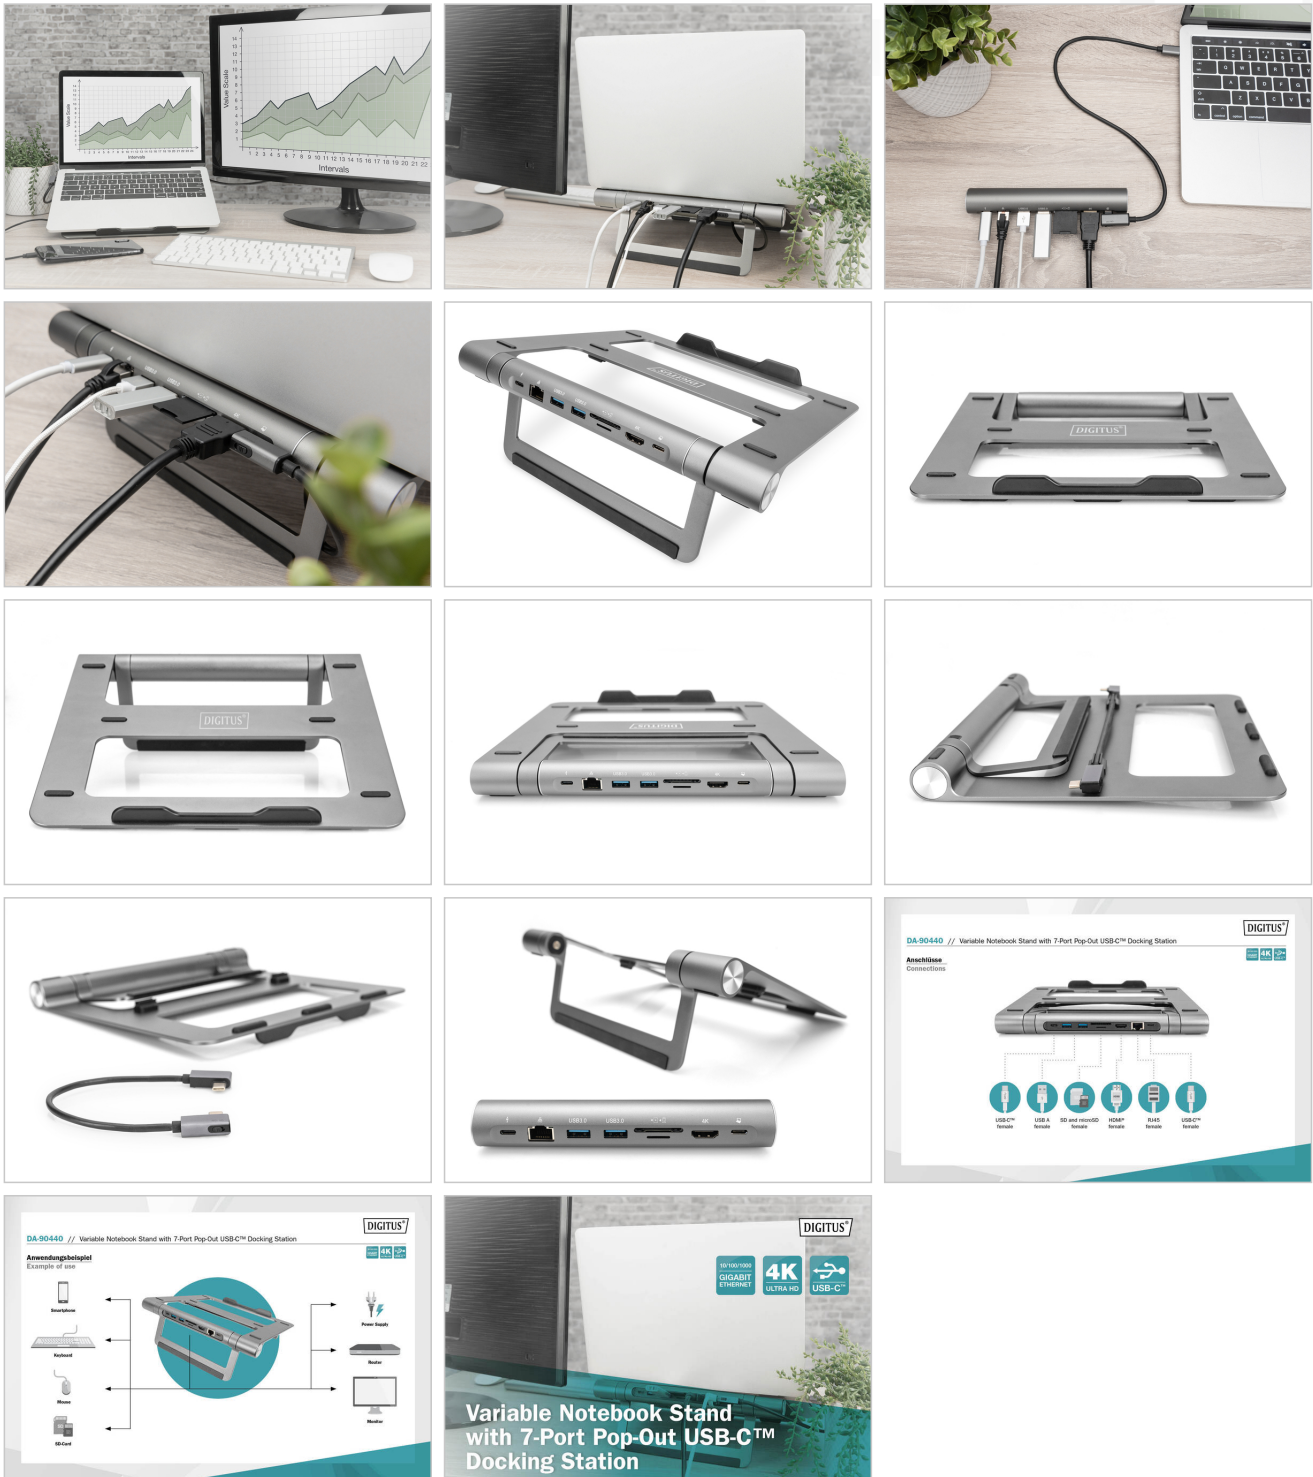

**Safety notes**

- Please read the entire manual before starting assembly and installation. Please contact your local dealer if you have any questions about the instructions or warnings.
- **CAUTION:** Use with products that exceed the permitted weight may result in damage or possible injury.
- Brackets should be fitted in accordance with the installation instructions. Incorrect installation can result in damage or injury.
- Use safety equipment and suitable tools. The product should only be installed by specialists.
- This product can be installed on timber-framed, solid concrete or stone walls.
- The load-bearing surfaces should be able to safely withstand the entire weight of appliances and all additional components.

- Only use the installation screws supplied and DO NOT TIGHTEN the screws TOO TIGHT.
- This product contains small parts that can cause a choking hazard if swallowed. Keep these parts away from children.
- Only use this product indoors. Using the product outdoors can lead to injuries and damage.
- IMPORTANT: Before installation, please check all components received against the components list. If parts are damaged or missing, ask your local dealer for replacement parts.
- MAINTENANCE: Check the bracket regularly for safety and stability (preferably every three months).

**EU responsible person**

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH  
Auf dem Schüffel 3  
Lüdenscheid, Germany  
<https://www.assmann.com>  
[info@assmann.com](mailto:info@assmann.com)