

DIGITUS CAT 5e, Class D, wall outlet, shielded, surface mount

DN-9002-N
EAN 4016032175681



CAT 5e wall outlet, shielded, 2x RJ45 8P8C, LSA, pure white, surface mount

The shielded CAT 5e network outlets from DIGITUS® are certificated to CAT 5e EIA/TIA 568 and ISO/IEC 11801, EN 50173. The cable installation takes place via LSA strips, color coded acc. EIA/TIA 568 B with horizontal cable entry. All network outlets from DIGITUS® are available flush mount or surface mount.

Vynikající výkon a kvalita spojení pro Vaši síť.


- Kabelová instalace LSA pruhy, barevné kódy založené na EIA/TIA 568 A & B
- Integrovaná instalace odlehčení napjatého kabelu
- Barva: Bílá RAL9003


Package contents

- Outlet
- Mounting instruction

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	60	15.54	45.50	35.50	21.00	33,920.20
Packaging Unit Inside	1	0.26	5.50	9.00	12.00	594.00
Packaging Unit Single	1	0.26	5.50	9.00	12.00	594.00
Net single without Packaging	1	0.18	4.80	8.00	8.00	288.00

More images:

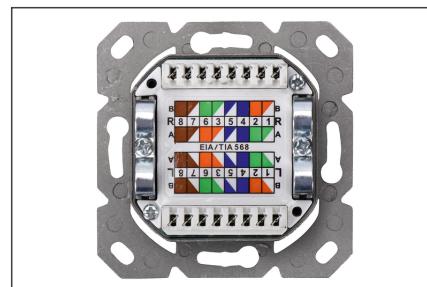

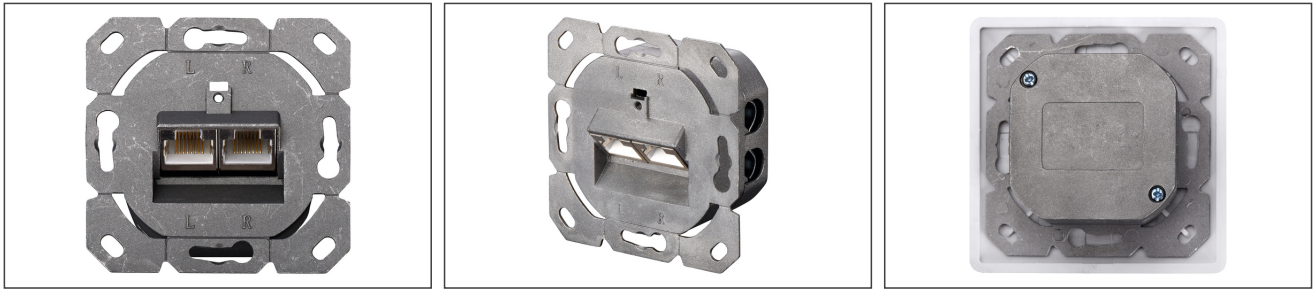**Safety notes**

- Protect product from moisture
- Avoid antistatic charging when installing the product
- Observe the specifications of the raw cable manufacturer during installation

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
Auf dem Schüffel 3
Lüdenscheid, Germany
<https://www.assmann.com>
info@assmann.com