

DIGITUS Power strip with aluminum profile and integrated circuit breaker, 18-way protective contact socket outlet

A-19-STRIP42-1
EAN 4016032221203



18 way outlet strip - 42U in length vertical dual circuit, aluminum, 2x 16 A, circuit breaker

The DIGITUS® power strips are the perfect solution for your network or server rack. In terms of power distribution, the PDU meets requirements of many applications in IT, network technology, laboratories as well as the home. The power strip can be mounted vertically. Depending on the rack type, it is possible to mount the power strip with the taps facing right or left.

- Automatic circuit breaker against overload and short circuit
- Circuit breaker: 16A
- Tripping characteristic: Type C
- Short-circuit breaking capacity (I_{cn} & I_{cs}): 6000 A
- Vertical installation
- Rotation of the cans: 35°
- Housing: Aluminum profile
- Plastic components made of ABS UL-94V-0
- Input: safety plug CEE 7/7, 230 Vac / 16 A

- Output: appliance sockets 18 x socket outlet with earthing contact DIN 49440, max. 16 A per output
- Supply cable: cable cross-section: 1.5 mm², length: 2 m
- Dimensions: 1860 x 45 x 45 mm (HxWxD)

Attributes





- Additional Features: Circuit breaker
- Current: 16 A
- Input Plug: CEE7/7
- Installation: Desktop, Rack 0U
- Outlets: CEE 7/3
- Phase: 1ph
- Power: 3,6 kVA
- Volts: 230 V

Package contents

- Scope of delivery: 1 socket strip, 2 mounting brackets; 1 safety instructions

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm ³
Packaging Unit Carton	4	11.16	184.50	30.00	15.00	83,025.00
Packaging Unit Inside	1	2.79	201.70	10.30	10.40	21,606.10
Packaging Unit Single	1	2.79	201.70	10.30	10.40	21,606.10
Net single without Packaging	1	2.02	201.70	10.30	10.40	21,606.10

More images:

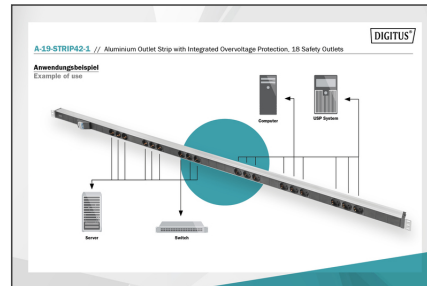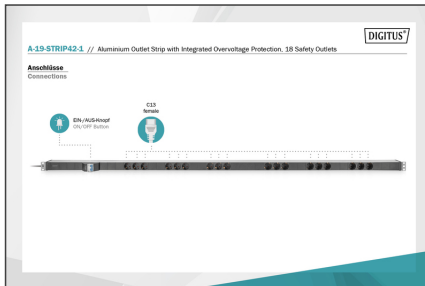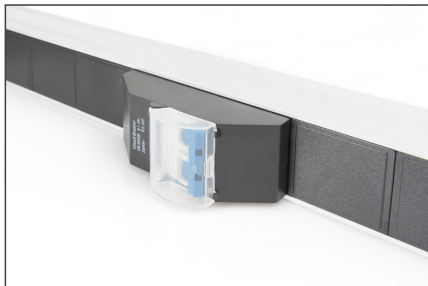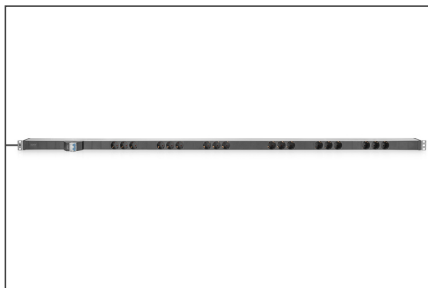

Safety notes

- This product is not intended for unsupervised use by children or persons under their care!
- Prevent higher humidity or temperatures than those specified in the data sheet - Avoid moisture, dust or vapors, solvents, flammable gases.
- Multiple sockets are not designed for permanent use with heavy loads!
- Multiple sockets must not be cascaded (avoid stringing together several multiple sockets).
- The maximum connected load must not be exceeded.
- Defective multiple sockets must be taken out of service immediately and disposed of in an environmentally friendly manner.
- In the event of a fault, take the product out of operation and contact a qualified electrician.
- Do not open the product.
- Disconnect the product from the power supply before cleaning. Do not use any aggressive or abrasive cleaning agents for cleaning.
- The ingress of liquids can lead to a short circuit.

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
Auf dem Schöffel 3
Lüdenscheid, Germany
<https://www.assmann.com>
info@assmann.com