

Digitus® aluminum outlet strip, 8 safety outlets, 2 m supply safety plug

DN-95401

EAN 4016032266396



1U Aluminum PDU, rackmountable, 8x safety outlet 16A, 4000W, 250VAC 50/60Hz,

The DIGITUS® power distribution units are the perfect solution for you 482.6 mm (19") network- or server cabinet. Optimized for rack installation with 220-240V 50-60 Hz the DIGITUS® PDU offer you the best performance with qualified efficiency. The 482.6 mm (19") fixing material provides an optimized enclosing on the profile rails of your cabinets. Every PDU can be mounted horizontally as well as vertically and has the possibility, according to the cabinet, to be mounted faced up or down.

Safe and professional power in the 482.6 mm (19") range

- 8x safety outlets 250VAC 50/60Hz / 16A / 4000W
- 2x angle profiles for cabinet mounting
- Aluminum profile




- 2 m Cable H05VV-F 3G1,5 mm² with safety plug
- Plastic components made by ABS UL-94V-0
- Grounding on aluminium profile
- 45° turned safety outlets

Attributes

- Current: 16 A
- Input Plug: CEE7/7
- Installation: Desktop, Rack OU, Rack 1U
- Outlets: CEE 7/3
- Phase: 1ph
- Power: 3,6 kVA
- Volts: 230 V
- Inch form factor (IEC 60297): 482.6 mm (19")

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm ³
Packaging Unit Carton	10	10.50	55.00	46.00	27.00	68,310.00
Packaging Unit Inside	1	1.05	6.70	50.00	9.10	3,048.50
Packaging Unit Single	1	1.05	6.70	50.00	9.10	3,048.50
Net single without Packaging	1	0.77	4.40	48.20	4.40	0.00

More images:

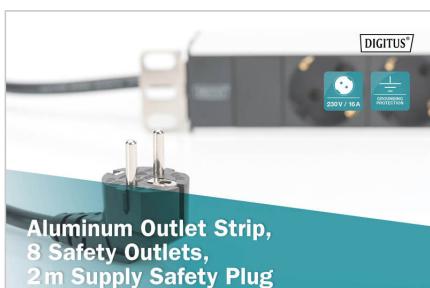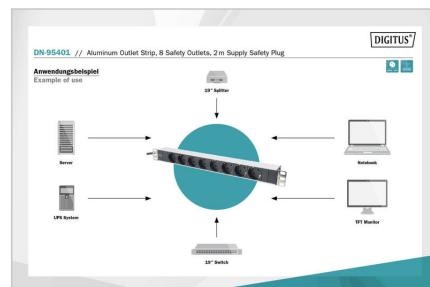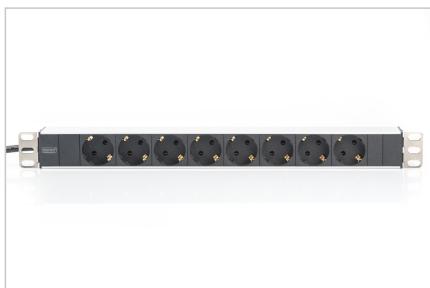

**Aluminum Outlet Strip,
8 Safety Outlets,
2m Supply Safety Plug**

Safety notes

- This product is not intended for unsupervised use by children or persons under their care!
- Prevent higher humidity or temperatures than those specified in the data sheet - Avoid moisture, dust or vapors, solvents, flammable gases.
- Multiple sockets are not designed for permanent use with heavy loads!
- Multiple sockets must not be cascaded (avoid stringing together several multiple sockets).
- The maximum connected load must not be exceeded.
- Defective multiple sockets must be taken out of service immediately and disposed of in an environmentally friendly manner.
- In the event of a fault, take the product out of operation and contact a qualified electrician.
- Do not open the product.
- Disconnect the product from the power supply before cleaning. Do not use any aggressive or abrasive cleaning agents for cleaning.
- The ingress of liquids can lead to a short circuit.

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
Auf dem Schüffel 3
Lüdenscheid, Germany
<https://www.assmann.com>
info@assmann.com