DIGITUS DIGITUS блок розеток из алюминиевого профиля, 3 розетки

DN-95411
EAN 4016032280712

1U Aluminum PDU, 254 mm (10") rack mount, 3x safety outlet, 16A, 4000W, 250VAC 50/60Hz

Распределители электропитания (РЭ) DIGITUS® - идеальное решение для сетей 19" или серверной комнаты. Благодаря возможности настенного крепления и работы в сетях 220-240 В 50-60 Гц, распределитель питания DIGITUS® предлагает сочетание наилучших технических характеристик и эффективности. Крепеж 19" обеспечивает надежное крепление на рейках в серверной комнате. Допускается как вертикальная, так и горизонтальная установка каждого РЭ. Кроме того, в зависимости от устройства серверной комнаты он может устанавливаться лицевой частью вверх или вниз.

Надежное профессиональное питание для 19-дюймового оборудования

- 3 розетки 250 В 50/60 Гц / 16 А / 4000 Вт
- Алюминиевый профиль
- 2 угловых профиля для монтажа в шкаф
- Кабель H05VV-F 35 сечением 1,5 мм² (2 м) с вилкой
- Пластиковые компоненты из АБС-пластика UL-94V-0
- Заземление на алюминиевый профиль
- Розетки с защитным контактом, повернутые на 35°

Attributes

- Current: 16 A
- Input Plug: CEE7/7
- Installation: Rack 0U, Rack 1U
- Outlets: CEE 7/3
- Phase: 1ph
- Power: 3,6 kVA
- Volts: 230 V
- Inch form factor (IEC 60297): 254 mm (10")

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	20	13.80	48.00	37.00	31.50	55,944.00
Packaging Unit Inside	1	0.69	12.00	29.00	5.30	1,844.40
Packaging Unit Single	1	0.69	12.00	29.00	5.30	1,844.40
Net single without Packaging	1	0.49	4.60	24.40	4.60	0.00

More images:

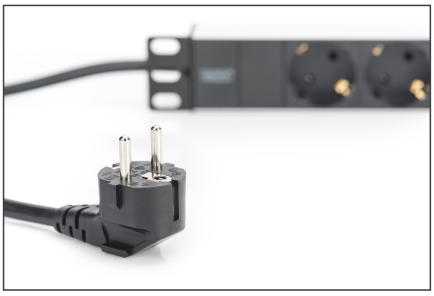

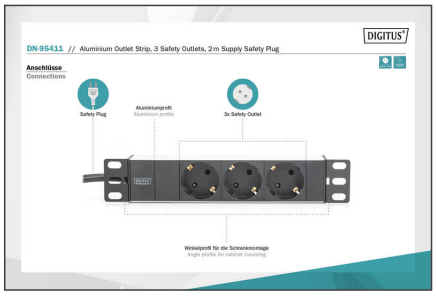

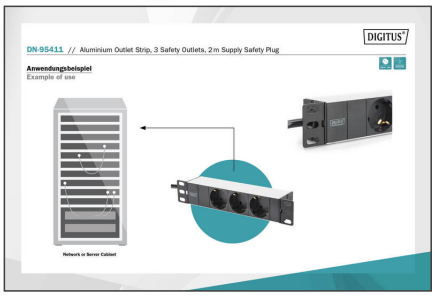

Safety notes

- This product is not intended for unsupervised use by children or persons under their care!
- Prevent higher humidity or temperatures than those specified in the data sheet - Avoid moisture, dust or vapors, solvents, flammable gases.
- Multiple sockets are not designed for permanent use with heavy loads!
- Multiple sockets must not be cascaded (avoid stringing together several multiple sockets).
- The maximum connected load must not be exceeded.
- Defective multiple sockets must be taken out of service immediately and disposed of in an environmentally friendly manner.
- In the event of a fault, take the product out of operation and contact a qualified electrician.
- Do not open the product.
- Disconnect the product from the power supply before cleaning. Do not use any aggressive or abrasive cleaning agents for cleaning.
- The ingress of liquids can lead to a short circuit.

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
Auf dem Schüffel 3
Lüdenscheid, Germany
https://www.assmann.com
info@assmann.com