# DIGITUS DIGITUS® экстендер VGA-UTP набо

**DS-53400**
**EAN 4016032356721**

**VGA Extender over UTP, Set max. 1920x1200, signal extended by 300m, 0-70øC**

Удлиняет сигнал VGA до 300 м, причем используется только один простой кабель UTP между передатчиком и приемником.

**Предлагает простое и быстрое распределение видеосигналов VGA до расстояния в 300 м – размещайте мониторы там, где захотите.**

- Экстендер Cat 5 VGA, состоящий из передающего и приемного элемента
- Возможно высокое разрешение до 1920 x 1200 пикселей
- Поддерживает удлинение сигналов стерео-аудио
- Размер (Д x Ш x В): 110 mm x 75 mm x 25 mm
- Вес: 213 г (передатчик), 208 г (приемник)
- Рабочая температура: 0-70 °C
- Влажность воздуха: 10 % до 85 % (не конденсирующий)
- Разъем питания: 5 В @ 1 А, макс 5 Вт

**Attributes**

- HDTV Resolution max.: 1920 x 1200 Pixel, 60Hz
- HDTV Standard: Full HD
- Category: CAT 5e
- Distance: 300 m
- KVM: no
- PoE (Power over Ethernet): no
- Video connection ports: VGA

**Package contents**

- 1x DIGITUS® экстендер VGA-UTP
- 1 инструкция по эксплуатации

| Logistics | | | | | | |
|---|---|---|---|---|---|---|
| | Number (pcs) | Weight (kg) | Depth (cm) | Width (cm) | Height (cm) | cm³ |
| Packaging Unit Carton | 20 | 15.20 | 60.00 | 36.50 | 25.50 | 55,845.00 |
| Packaging Unit Inside | 1 | 0.76 | 27.30 | 17.50 | 5.50 | 2,627.62 |
| Packaging Unit Single | 1 | 0.76 | 27.30 | 17.50 | 5.50 | 2,627.62 |
| Net single without Packaging | 1 | 0.21 | 11.00 | 7.50 | 2.50 | 0.00 |

**More images:**

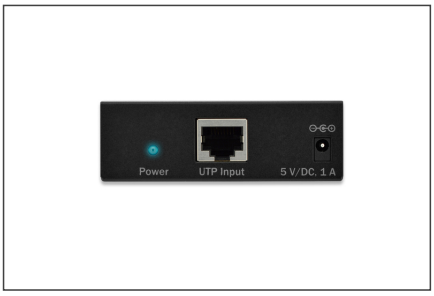


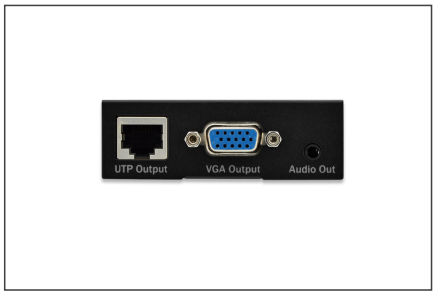

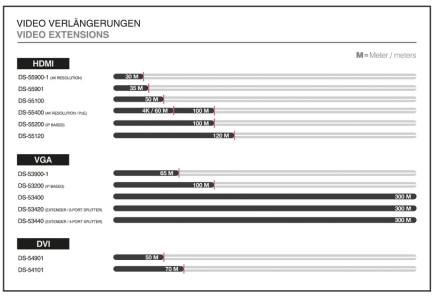


**Safety notes**

- If the device is powered by a plug-in power supply, ensure that the power adapter is connected correctly and meets the specified requirements (e.g. voltage and current).
- Only use certified CAT5e or CAT6 cables to ensure stable signal transmission.
- For particularly long cable runs or in environments prone to interference, it is recommended to use shielded network cables.
- Make sure that all connections are tight and secure to avoid loose contacts that could affect the signal quality. Make sure that the HDMI and Ethernet connections are connected correctly.
- Make sure that the CAT cable is not laid near high-voltage power lines or other strong sources of electromagnetic interference to avoid signal interference.
- Only operate the device within the specified temperature range.
- Do not use the device outdoors or in damp or wet environments
- Check all connections and cables regularly for wear or damage. Cables and connections can wear out, especially with frequent use or long installations, which can lead to poor signal quality or system failure.

**EU responsible person**

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
Auf dem Schüffel 3
Lüdenscheid, Germany
https://www.assmann.com
info@assmann.com