

DIGITUS® Injetor PoE+ Ethernet 10G de 24 portas, 802.3af, 370 W

DN-95117

EAN 4016032430384



Ethernet 10G Injetor PoE+ de 24 portas 24 portas de entrada, 24 portas de saída + PoE

O DIGITUS® DN-95117 é um hub mid-span 10G PoE+ de 24 portas (injetor PoE). Oferece 24 portas de entrada para dados e 24 portas de saída que fornecem dados e PoE. Cada porta PoE suporta dispositivos ligados de acordo com a norma PoE IEEE802.3af e IEEE802.3at com 15,4 watts e 30 watts, respectivamente, como pontos de acesso PoE, telefones IP PoE ou câmaras IP PoE. O switch fornece um orçamento máximo de 370 watts para todas as portas e um orçamento máximo de 30 watts por porta.

Minimização do esforço de cablagem para dispositivos com capacidade PoE

- 48 x 10/100/1000Mbps/2,5/10G (24 x dados de entrada, 24 x dados de saída+PoE)
- Compatível com as normas IEEE802.3af , IEEE802.3at
- Alimentação PoE através do PIN 1,2(V-) e PIN 3,6(V+)
- Potência total máxima de 370 watts
- Compatível com as normas IEEE802.3, IEEE802.3u, IEEE802.3ab
- Detecção automática de cabos - Função Auto-MDI/MDI-X

- Detecção automática de full e half duplex
- Fonte de alimentação: 100 - 240V AC 50/60Hz
- Gama de temperaturas de funcionamento: 0 °C a 40 °C
- Temperatura de armazenamento: -20°C - 70°C
- Dimensões (mm): 440(C) x 345(L) x 45(A)
- MTBF: 100.000 horas
- Consumo de energia: 20W

Attributes

- Number of ports: 24
- PoE Power budget: 370 W
- PoE standard: IEEE802.3at (PoE+)
- Ethernet speed: 10 gigabit
- Industrial usage: no


Package contents

- Injetor 10G PoE+ de 24 portas
- Guia de início rápido
- Cabo de alimentação
- Acessórios de montagem

Logistics

	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	3	16.00	52.50	33.00	44.00	76,230.00
Packaging Unit Inside	1	5.33	50.50	40.50	9.50	19,429.90
Packaging Unit Single	1	5.33	50.50	40.50	9.50	19,429.90
Net single without Packaging	1	4.39	44.00	34.50	4.50	0.00

More images:

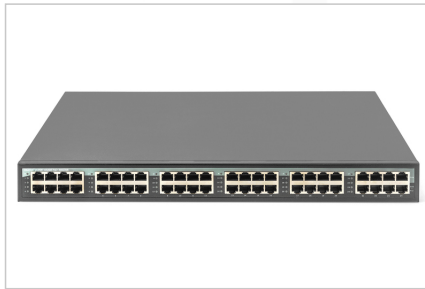

24 Port 10G Ethernet PoE+ Injector

Minimization of the cabling costs for PoE-capable devices such as wireless APs, IP phones or any other PoE-capable device!

- Automatic surge protection
- Plug and play installation
- Supports backhaul
- Transmission range
- Energy-efficient operation
- Full Power Budget

Unleash 10 Gbps Power and Speed, All in One!

10G

10G Ethernet PoE+ Injector Series

- DN-95108 1x port 30 W
- DN-95116 16x port 250 W
- DN-95117 24x port 370 W

Wide range of applications

Ideal for offices, hotels, campuses, warehouses, supermarkets, retail stores and shopping malls

Power input socket

Input: 24x port (data)

Output: 24x port (data, PoE)

Expand your network

- Public area: Wireless access points
- Outdoor installation: IP surveillance systems
- Business environment: VoIP, video conferencing, IP phones



Safety notes

- This product is intended for indoor use only.
- Read all instructions and follow all warnings and instructions on the device.
- Do not place this appliance on an unstable surface (such as a trolley, stand, table, etc.).
- Do not use this appliance near water.
- Do not place this appliance near or above a radiator.
- The housing is equipped with openings for heat dissipation and ventilation. To prevent overheating during operation, the ventilation openings must not be blocked or covered.
- Do not place the appliance on a soft surface (e.g. bed, sofa, blanket, etc.). This will block the ventilation.
- The appliance must not be installed in a closed environment if adequate ventilation is not guaranteed.
- Do not spray any liquids onto the appliance.
- Disconnect the mains plug before cleaning. Do not use any liquid or foam cleaners.
- Clean the appliance with a damp cloth.
- Connect the device according to the power supply on the rating plate.
- To prevent damage to the appliance, it is important that all appliances are properly earthed.
- Do not place any objects on the power cable and lay it in such a way as to avoid tripping hazards.
- Use a surge protector, a regulator or an uninterruptible power supply (UPS) to protect your system from sudden, temporary and reduced power.
- Secure the system cable and mains cable properly and ensure that no objects are pressing on the cable.
- Do not insert any objects into the appliance through the openings in the housing. There is a risk of a short circuit, which can lead to fire or electric shock.
- Do not attempt to repair the appliance yourself. Always contact an authorized customer service centre.
- If any of the following conditions occur, unplug the appliance and return it to an authorized service centre for repair

- The mains cable, power supply unit or plug for the power supply is damaged or worn;
- Liquid has penetrated the appliance;
- The device has been exposed to rain or water;
- The device has been dropped or the housing has been damaged;
- The function of the device has obviously changed;
- The appliance cannot be operated as described in the operating instructions.

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
Auf dem Schüffel 3
Lüdenscheid, Germany
<https://www.assmann.com>
info@assmann.com