

DIGITUS® Tomada múltipla com perfil de alumínio, tomadas elétricas com ligação terra de 8 vias, conector de segurança do cabo de alimentação de 2 m

DN-95412

EAN 4016032431770



Aluminium PDU, Rackmountable, frequency filter 16A, 4000W, 250VAC 50/60Hz, 7x safety outlet, 2m

As tomadas múltiplas DIGITUS® são a solução perfeita para o seu armário de servidor ou de rede de 19". Para otimização da montagem de armário, as tomadas múltiplas DIGITUS®, com 220-240 V a 50-60 Hz, proporcionam-lhe o melhor desempenho com carga de trabalho adequada. O material de montagem incluído de 19" garante uma fixação ideal às calhas de perfis dos seus armários. Cada tomada múltipla pode ser montada tanto na horizontal como na vertical, existindo a possibilidade de serem fixadas com os terminais para cima ou para baixo, conforme o tipo de armário.

Fonte de alimentação segura e profissional na área de 19"

- 7 tomadas 250VAC 50/60Hz/16A/4000W
- Perfil de alumínio
- 2x perfis de ângulo para montagem de armário
- Cabo de alimentação de 2 m H05VV-F 35 1,5 mm² como tomada elétrica de ligação terra

- Componentes de plástico de ABS UL-94V-0
- Ligação à terra no perfil de alumínio
- Tomadas elétricas com ligação terra rodadas a 35°

Attributes

- Additional Features: Line filter, Overvoltage protection
- Current: 16 A
- Input Plug: CEE7/7
- Installation: Rack 0U, Desktop
- Outlets: CEE 7/3
- Phase: 1ph
- Power: 3,6 kVA
- Volts: 230 V



Package contents

- Scope of delivery: 1 socket strip, 2 mounting brackets; 1 safety instructions

Logistics

	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm ³
Packaging Unit Carton	10	14.48	76.50	16.50	31.50	39,760.90
Packaging Unit Inside	1	1.45	75.50	12.50	6.50	6,134.38
Packaging Unit Single	1	1.45	75.50	12.50	6.50	6,134.38
Net single without Packaging	1	0.00	4.50	62.00	4.50	0.00

More images:

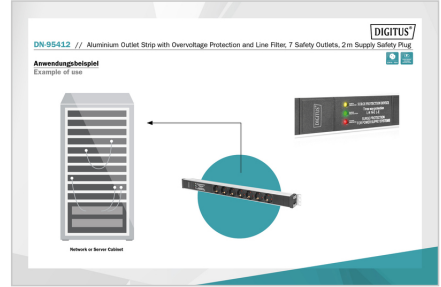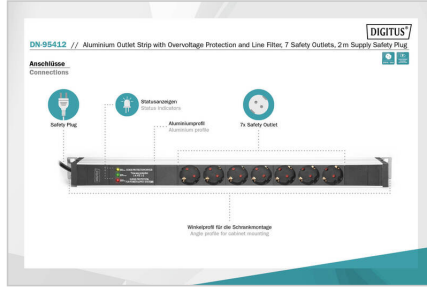

Safety notes

- This product is not intended for unsupervised use by children or persons under their care!
- Prevent higher humidity or temperatures than those specified in the data sheet - Avoid moisture, dust or vapors, solvents, flammable gases.
- Multiple sockets are not designed for permanent use with heavy loads!
- Multiple sockets must not be cascaded (avoid stringing together several multiple sockets).
- The maximum connected load must not be exceeded.
- Defective multiple sockets must be taken out of service immediately and disposed of in an environmentally friendly manner.
- In the event of a fault, take the product out of operation and contact a qualified electrician.
- Do not open the product.
- Disconnect the product from the power supply before cleaning. Do not use any aggressive or abrasive cleaning agents for cleaning.
- The ingress of liquids can lead to a short circuit.

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
 Auf dem Schüffel 3
 Lüdenscheid, Germany
<https://www.assmann.com>
info@assmann.com