

DIGITUS Tomada com 2 portas USB

DA-70613

EAN 4016032443193



Safety Wall Outlet, 2x USB, USB output total: 5V 2.1A, Input: AC 250V 50Hz, RAL 9003

Charging of your smartphone at any safety socket! You can even charge 2 USB devices simultaneously with this safety socket. You can charge your Smartphone, Tablet or Digital Camera for example. Protect you and your family by the integrated shutters in the safety socket. The built-in electronic overload and short-circuit protection of the USB ports provides additional safety for your connected devices. Upgrade your home sockets and enjoy charging your USB devices directly in every sockets at any time.

Porta USB para o carregamento de dispositivos móveis

- Tomada com ligação à terra
- 2x porta USB

- Tensão de saída: 5V DC (USB)
- Tensão de saída: 250V AC (tomada com ligação à terra)
- Tipo de montagem: embutida
- Corrente de saída: máx. 2,1 A (USB)
- Profundidade de montagem: 32 mm
- Proteção: protegido através de proteção contra curto-circuito e sobrecarga (USB)
- Utilização paralela inteligente de todas as ligações (USB até 2,1A)
- Cor: Branco puro RAL 9003

Package contents


- Tomada com 2 portas USB
- Instruções de Montagem

Logistics

	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm ³
Packaging Unit Carton	50	7.80	48.00	35.00	20.50	34,440.00
Packaging Unit Inside	1	0.16	9.00	9.00	6.00	486.00
Packaging Unit Single	1	0.16	9.00	6.00	12.00	648.00
Net single without Packaging	1	0.11	8.00	4.00	8.00	0.00

More images:



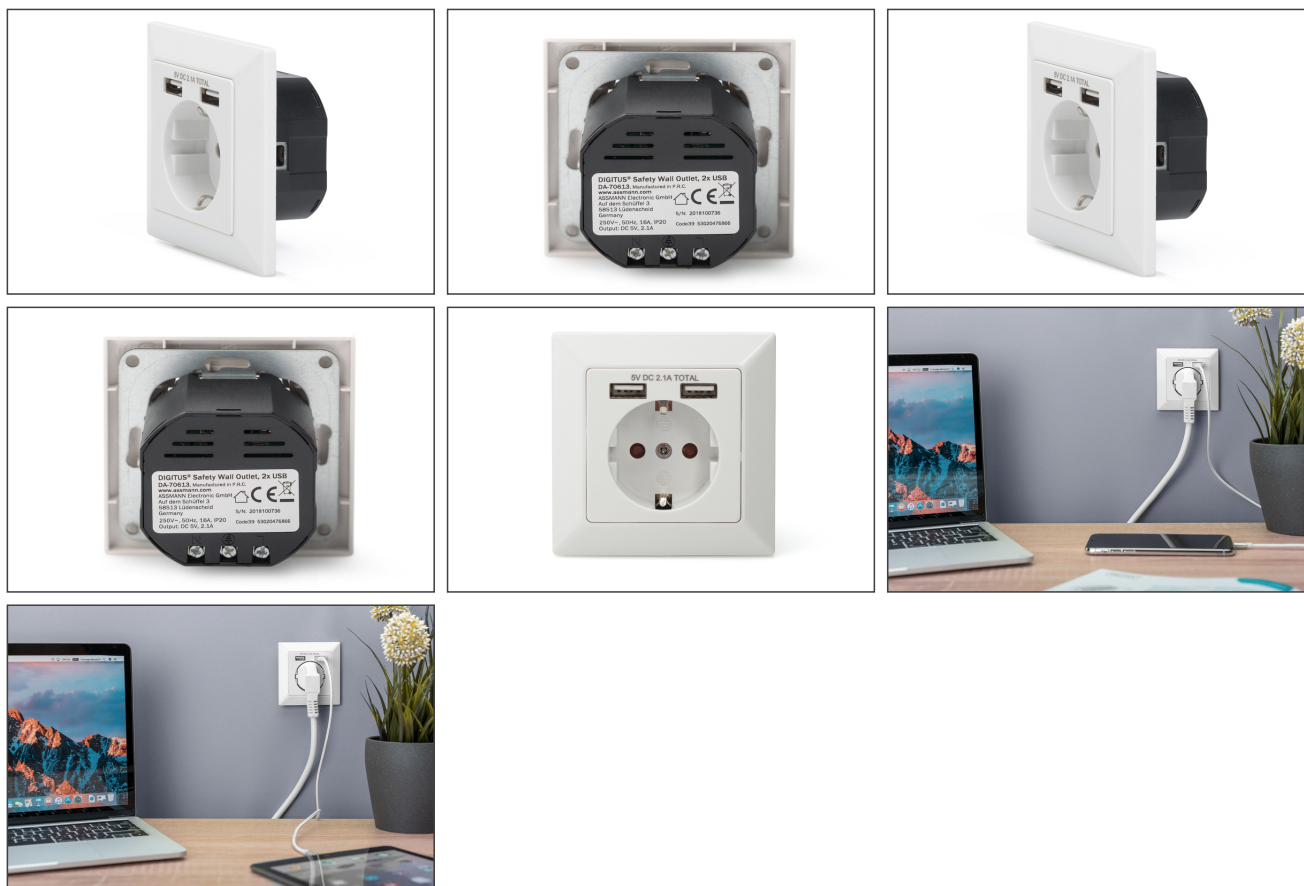

Safety notes

- Only operate the device indoors. Avoid exposure to moisture, dust, sunlight or other sources of heat.
- The socket outlet is part of the building installation. The relevant national standards and directives must be observed during planning and installation.
- The appliance may only be operated on the 230V/50 Hz AC mains supply. Work on the 230V mains may only be carried out by a qualified electrician certified in your country.
- Observe the applicable accident prevention regulations during installation.
- To avoid electric shock to the appliance, please disconnect the mains voltage (e.g. switch off the circuit breaker).
- Failure to observe the installation instructions may result in fire or other hazards.
- Installation may only be carried out in commercially available flush-mounted boxes (appliance boxes) in accordance with DIN 49073-1, with a minimum depth of 40 mm.
- When connecting to the device terminals, observe the permissible cables and cable cross-sections.
- Mandatory information in accordance with the appliance safety standard
- Note !
- Installation only by persons with relevant electrical knowledge and experience!
- Improper installation puts your own life and the lives of the users of the electrical system at risk.
- You risk serious damage to property if the installation is not carried out correctly. You may be personally liable for personal injury and damage to property.
- Contact an electrician.
- Specialist knowledge required for installation:
- The following specialist knowledge in particular is required for installation:
- The application of the 5 safety rules 1. Disconnect 2. Secure against reconnection 3. Ensure there is no voltage 4. Earth and short-circuit 5. Cover or isolate neighboring live parts.
- Selection of suitable tools, measuring equipment and, if necessary, personal protective equipment.
- Selection of the electrical installation material to ensure the switch-off conditions.
- Check the electrical system after installation.
- Observing the IP protection classes
- Installation only with suitable electrical installation material
- Check and observe the respective specifications of the type of supply network (TN system, TT system or IT system) and the resulting connection conditions (zeroing, protective earthing, or any additional measures required, etc.).
- Maintenance and cleaning:
- The socket is maintenance-free.
- Leave repairs to a qualified electrician.
- Only clean the device with a soft, clean, dry and lint-free cloth.
- Do not use cleaning agents containing solvents. This can damage the plastic housing.
- Do not use wet cloths or sponges to clean the appliance.

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH

Auf dem Schüffel 3

Lüdenscheid, Germany

<https://www.assmann.com>

info@assmann.com