

DIGITUS® Tomada de corrente com portas USB A e USB-C™, embutida

DA-70618

EAN 4016032459842



Tomada 2x USB, 1x USB Tipo C 5V 3.1A, entrada: AC250V 50HZ, RAL 9003

Carregar smartphones e tablets diretamente na tomada de parede! Com a tomada de carregamento USB DIGITUS®, pode até carregar 3 smartphones ou tablets ao mesmo tempo. Carregue um dispositivo USB-C™ com até 14 W (5 V / 2,8 A) e dois dispositivos USB A com até 14 W (5 V / 2,8 A). Por exemplo, carregue o seu smartphone e tablet ao mesmo tempo com um total de 15,5 W de potência de carregamento disponível. Proteja-se a si e à sua família com a proteção eletrônica integrada contra curto-circuitos e sobrecargas das portas USB. Atualize a sua instalação elétrica existente e desfrute da possibilidade de carregar os seus dispositivos USB diretamente na tomada de parede em qualquer altura.

Tomada de carregamento com 2 portas USB A integradas e 1 porta USB Type-C™ para carregar smartphones/tablets

- 1 x ligação USB Type-C

- 2 x portas USB A
- Tensão de entrada: 250 VAC / 50 Hz
- Tensão de saída: 5 VDC (USB)
- Corrente de saída: máx. 3,1 A (corrente de carga total)
- Segurança: Protegido por proteção eletrónica contra curto-circuito e sobrecarga (USB)
- Tipo de montagem: embutida
- Profundidade de instalação: 32 mm
- Utilização paralela inteligente de todas as ligações (USB total até 3,1 A)
- Cor: Branco puro RAL 9003



Package contents

- 1 x tomada de carregamento para smartphones/tablets com 2 x USB A, 1 x USB Type-C™
- 1 x QIG

Logistics

	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	50	8.00	48.00	35.00	20.50	34,440.00
Packaging Unit Inside	1	0.16	9.00	6.00	13.00	702.00
Packaging Unit Single	1	0.16	9.00	6.00	12.00	648.00
Net single without Packaging	1	0.12	8.00	4.00	8.00	0.00

More images:

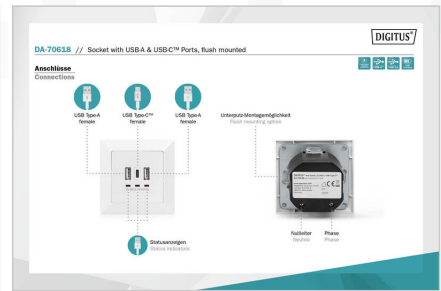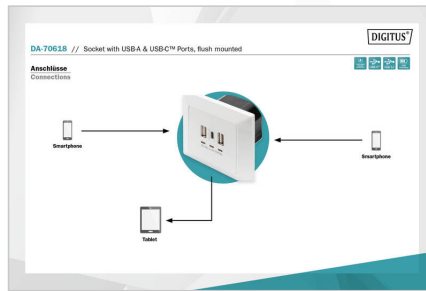

Safety notes

- Only operate the device indoors. Avoid exposure to moisture, dust, sunlight or other sources of heat.
- The socket outlet is part of the building installation. The relevant national standards and directives must be observed during planning and installation.
- The appliance may only be operated on the 230V/50 Hz AC mains supply. Work on the 230V mains may only be carried out by a qualified electrician certified in your country.
- Observe the applicable accident prevention regulations during installation.
- To avoid electric shock to the appliance, please disconnect the mains voltage (e.g. switch off the circuit breaker).
- Failure to observe the installation instructions may result in fire or other hazards.
- Installation may only be carried out in commercially available flush-mounted boxes (appliance boxes) in accordance with DIN 49073-1, with a minimum depth of 40 mm.
- When connecting to the device terminals, observe the permissible cables and cable cross-sections.
- Mandatory information in accordance with the appliance safety standard
- Note!
- Installation only by persons with relevant electrical knowledge and experience!
- Improper installation puts your own life and the lives of the users of the electrical system at risk.
- You risk serious damage to property if the installation is not carried out correctly. You may be personally liable for personal injury and damage to property.
- Specialist knowledge required for installation:
 - The following specialist knowledge in particular is required for installation:
 - The application of the 5 safety rules 1. Disconnect 2. Secure against reconnection 3. Ensure there is no voltage 4. Earth and short-circuit 5. Cover or isolate neighboring live parts.
 - Selection of suitable tools, measuring equipment and, if necessary, personal protective equipment.
 - Selection of the electrical installation material to ensure the switch-off conditions.
 - Check the electrical system after installation.
 - Observing the IP protection classes
 - Installation only with suitable electrical installation material
 - Check and observe the respective specifications of the type of supply network (TN system, TT system or IT system) and the resulting connection conditions (zeroing, protective earthing, or any additional measures required, etc.).
- Maintenance and cleaning:
 - The socket is maintenance-free.
 - Leave repairs to a qualified electrician.
 - Only clean the device with a soft, clean, dry and lint-free cloth.
 - Do not use cleaning agents containing solvents. This can damage the plastic housing.

- Do not use wet cloths or sponges to clean the appliance.

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
Auf dem Schüffel 3
Lüdenscheid, Germany
<https://www.assmann.com>
info@assmann.com