# DIGITUS® 10" socket strip with aluminum profile, 4-way CEE 7/5 sockets

**DN-95418-FR**

**EAN 4016032482000**



**1U Aluminum PDU, 254 mm (10") rack mount, 4x CEE 7/5 outlet, 16A, 4000W, 250VAC 50/60Hz**

The DIGITUS® power strips are the perfect solution for your network or server cabinet. In terms of power distribution, the PDU meets the requirements of many applications in IT, network technology, laboratories and the home. The power strip can be mounted in the 10" area of the cabinet in a space-saving 1U.

**Safe and professional power supply in the 10" range**

- Horizontal 10" installation in the rack
- Housing: Aluminum profile
- Plastic components made of ABS UL-94V-0
- Input: earthing contact plug CEE 7/7, 230 Vac / 16 A
- Output: 4 x CEE 7/5 , max. 16 A per output
- Supply cable: cable cross-section: 1.5 mm² , length: 2 m
- Rated voltage: 230-250 VAC, 50/60 Hz
- Dimensions: 254 mm (10") x 45 (1U) x 45 mm (HxWxD)

**Attributes**

- El. snaga: 3,6 kVA
- Faze: 1 fazni
- Struja: 16 A
- Ugrađivanje: Stalak 1U
- Volti: 230 V
- Inčni faktor oblika (IEC 60297): 254 mm (10")

**Package contents**

- 1 x 10" socket strip, 4-way CEE 7/5
- 2 x angle profiles for cabinet assembly

**Logistics**

| | Number (pcs) | Weight (kg) | Depth (cm) | Width (cm) | Height (cm) | cm³ |
|---|---|---|---|---|---|---|
| **Packaging Unit Carton** | 10 | 7.00 | 30.00 | 52.00 | 48.50 | 75,660.00 |
| **Packaging Unit Inside** | 1 | 0.70 | 0.00 | 0.00 | 0.00 | 0.00 |
| **Packaging Unit Single** | 1 | 0.70 | 9.70 | 51.00 | 5.80 | 2,869.26 |
| **Net single without Packaging** | 1 | 0.80 | 3.50 | 25.40 | 4.50 | 0.00 |


Druckfehler, Irrtümer und technische Änderungen sind vorbehalten. | Printing errors, falsities and technical changes remain reserved.

**More images:**


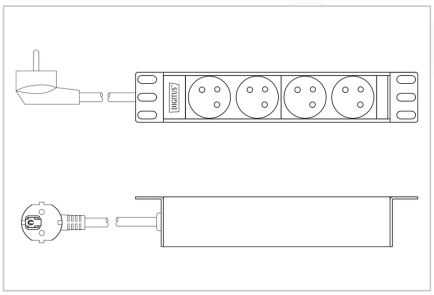




**Safety notes**

- This product is not intended for unsupervised use by children or persons under their care!
- Prevent higher humidity or temperatures than those specified in the data sheet - Avoid moisture, dust or vapors, solvents, flammable gases.
- Multiple sockets are not designed for permanent use with heavy loads!
- Multiple sockets must not be cascaded (avoid stringing together several multiple sockets).
- The maximum connected load must not be exceeded.
- Defective multiple sockets must be taken out of service immediately and disposed of in an environmentally friendly manner.
- In the event of a fault, take the product out of operation and contact a qualified electrician.
- Do not open the product.
- Disconnect the product from the power supply before cleaning. Do not use any aggressive or abrasive cleaning agents for cleaning.
- The ingress of liquids can lead to a short circuit.

**EU responsible person**

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
Auf dem Schüffel 3
Lüdenscheid, Germany
https://www.assmann.com
info@assmann.com