

# DIGITUS® Socket strip with aluminum profile, 12-way, 2 m supply cable with earthing contact plug

DN-95426

EAN 4016032483472



### 1U Aluminum PDU, rackmountable, 12 x C13 16A, 230VAC, 50/60Hz, Safety plug

The DIGITUS® power strips are the perfect solution for your network or server cabinet. In terms of power distribution, the PDU meets the requirements of many applications in IT, network technology, laboratories and the home. The power strip can be mounted in the 19" area of the cabinet in a space-saving 1U.

#### Safe and professional power supply in the 482.6 mm (19") range

- Horizontal 19" installation in the rack
- Housing: Aluminum profile
- Plastic components made of ABS UL-94V-0
- Input: safety plug CEE 7/7, 230 Vac / 16 A
- Output: appliance sockets 12 x IEC60320 C13, max. 10 A per output
- Supply cable: cable cross-section: 1.5 mm<sup>2</sup>, length: 2 m

- Rated voltage: 230–250 VAC, 50/60 Hz
- Dimensions: 482.6 mm (19") x 45 (1U) x 45 mm (HxWxD)

#### Attributes


- El. snaga: 3,6 kVA
- Faze: 1 fazni
- Izlazni priključci: IEC 60320 C13
- Struja: 16 A
- Ugrađivanje: Stalak 1U
- Ulazni utikač: CEE7/7
- Volti: 230 V
- Inčni faktor oblika (IEC 60297): 482,6 mm (19")

#### Package contents

- Scope of delivery: 1 socket strip, 2 mounting brackets; 1 safety instructions

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm <sup>3</sup>
Packaging Unit Carton	10	1.00	29.50	19.50	52.00	29,913.00
Packaging Unit Inside	1	0.10	5.80	9.70	51.00	2,869.26
Packaging Unit Single	1	0.10	5.80	9.70	51.00	2,869.26
Net single without Packaging	1	0.85	60.00	45.00	48.30	0.00

**More images:**

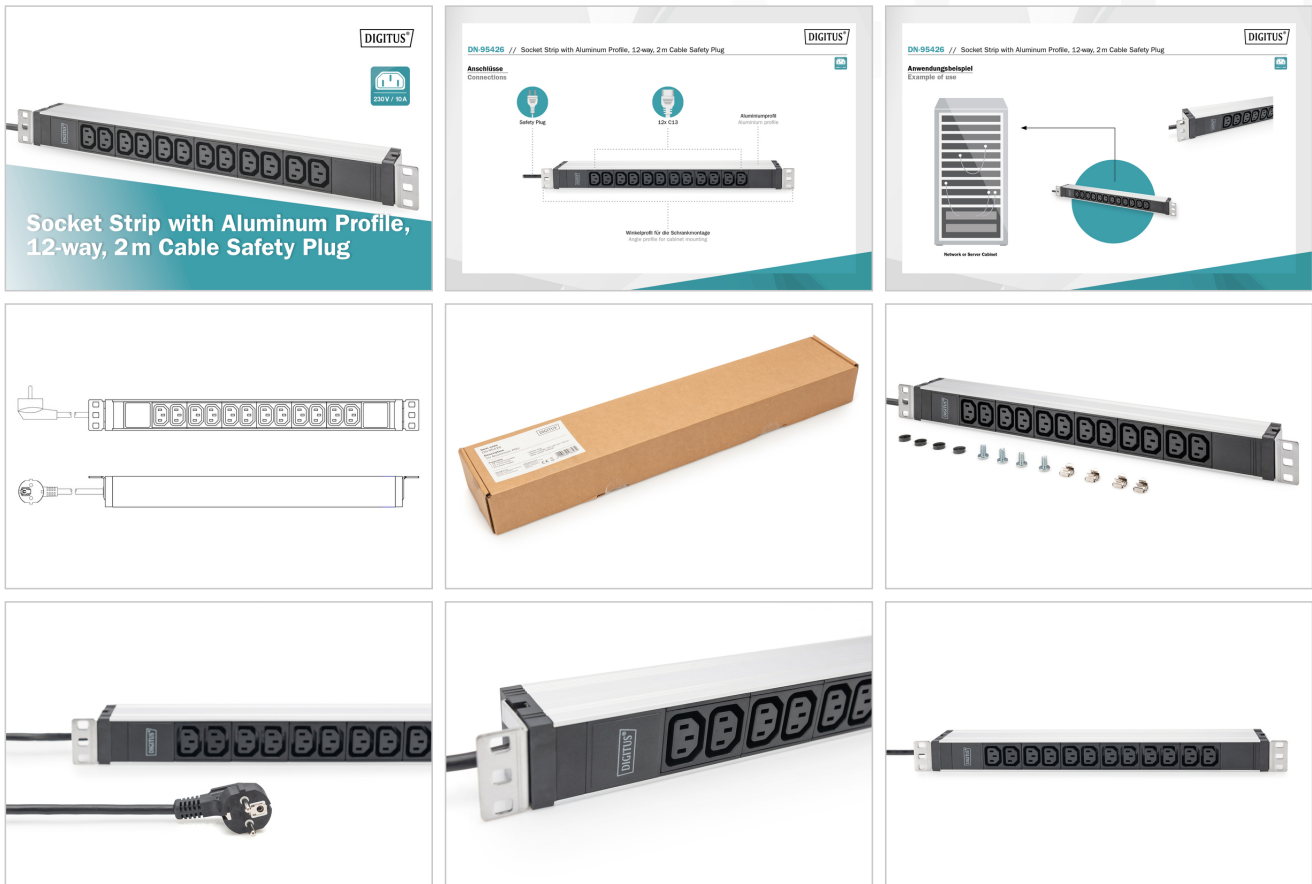

**Safety notes**

- This product is not intended for unsupervised use by children or persons under their care!
- Prevent higher humidity or temperatures than those specified in the data sheet - Avoid moisture, dust or vapors, solvents, flammable gases.
- Multiple sockets are not designed for permanent use with heavy loads!
- Multiple sockets must not be cascaded (avoid stringing together several multiple sockets).
- The maximum connected load must not be exceeded.
- Defective multiple sockets must be taken out of service immediately and disposed of in an environmentally friendly manner.
- In the event of a fault, take the product out of operation and contact a qualified electrician.
- Do not open the product.
- Disconnect the product from the power supply before cleaning. Do not use any aggressive or abrasive cleaning agents for cleaning.
- The ingress of liquids can lead to a short circuit.

**EU responsible person**

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH  
 Auf dem Schüffel 3  
 Lüdenscheid, Germany  
<https://www.assmann.com>  
[info@assmann.com](mailto:info@assmann.com)