


Digitus® CAT 5e SF/UTP patch kabel

DK-1531-010/G

EAN 4016032213772

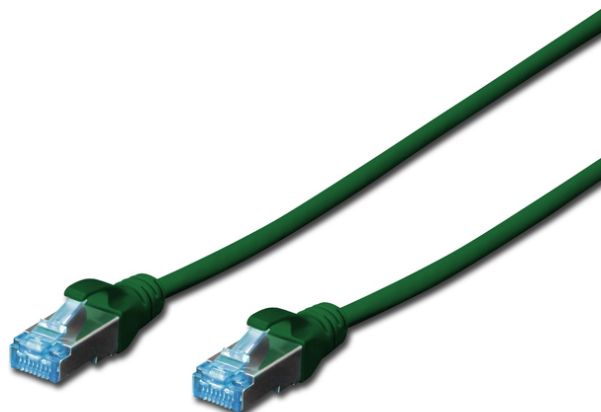

CAT 5e SF-UTP patch cable, Cu, PVC AWG 26/7, length 1 m, color green

DIGITUS® patch kabeli kategorije 5e klase D proizvedeni su i testirani u skladu sa standardima ISO/IEC 11801 i DIN EN 50173 CAT 5e. Oni jamče da je instalacija kabela u skladu sa specifikacijama kanala ISO & EN i nude izvanredne performanse u DIGITUS® CAT 5e ožičenju. Performanse su testirane do 100 MHz, uključujući karakteristike performansi kao što je unakrsna interferencija na kratkoj strani (NEXT). DIGITUS® patch kabeli posebno su razvijeni kako bi u potpunosti zadovoljili sve zahtjeve u različitim područjima primjene. Svaki kabel opremljen je injekcijski oblikovanim navlakom protiv uvijanja s odvodnom napreznjima. Navlaka također ima zaštitu s polugom na kopči koja sprječava zapinjanje kabela i lom poluge na konektoru. Plava boja konektora olakšava prepoznavanje kategorije 5e.

Standardima usmjereni prema budućnosti i vrhunska kvaliteta za vašu mrežu.

- 2x RJ45 utičnice (8P8C)

- Navlake s zaštitom od uvijanja, od ublažavanja napreznja i zaštitom poluge zaključavanja
- Oznaka duljine na kapuljačama
- Unutarnji vodič: Bakar (Cu)




Attributes

- Ambalaža: DIGITUS Polybag
- Asortiman: Patch kabeli s upredenim paricama
- Konektor 1: Modularni RJ45 (8/8) utikač
- Konektor 2: Modularni RJ45 (8/8) utikač
- Konfiguracija: 1:1
- Kategorija: CAT 5e
- Oklop: SF-UTP, oklop od folije i pletenice
- Duljina: 1 m
- Boja: zeleni
- Kapica: PVC
- Struktura: 4 x 2 AWG 26/7, upletena parica
- Tanka verzija: Ne
- Flat Version: Ne

Logistics

	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm ³
Packaging Unit Carton	200	9.40	46.00	33.00	28.00	42,504.00
Packaging Unit Inside	10	0.47	9.00	25.00	30.00	6,750.00
Packaging Unit Single	1	0.05	1.60	11.50	21.00	386.40
Net single without Packaging	1	0.04	100.00	1.20	1.30	164.20

More images:

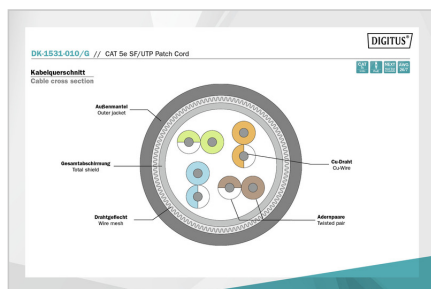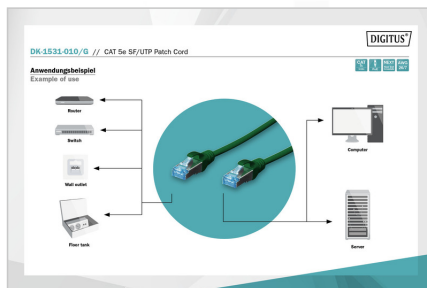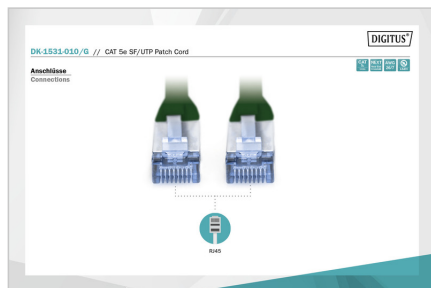

Safety notes

- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Cables must not be kinked sharply or bent at tight angles, as this can damage the inner wires and lead to failures.
- Ensure that the cables are not under tensile load, as this can damage the insulation and the wires inside the cable.
- Ensure that cables are not laid in areas where they can be easily damaged mechanically.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately to avoid failures, short circuits or even electric shocks.

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
Auf dem Schöffel 3
Lüdenscheid, Germany
<https://www.assmann.com>
info@assmann.com