


DIGITUS® Cabo de ligação cruzado premium CAT 5e SF-UTP

DK-1531-020-CO

EAN 4016032215837

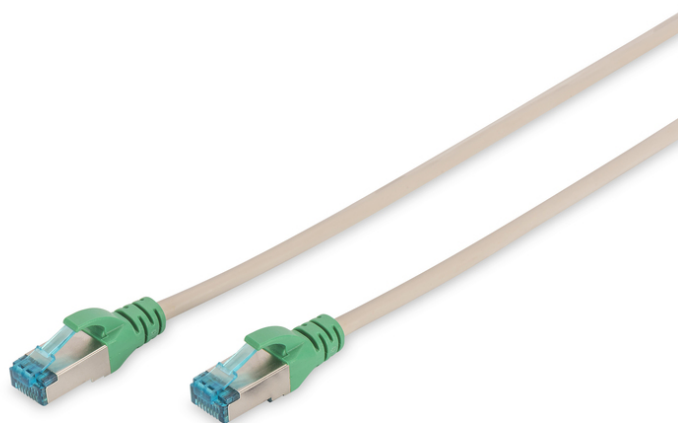

Cabo de ligação cruzado CAT 5e SF-UTP, cobre, PVC AWG 26/7, comprimento 2 m, cor cinzenta

Os cabos de ligação DIGITUS® CAT5e, Classe D, SF-UTP são fabricados e testados de acordo com a norma ISO/IEC 11801 e DIN EN 50173 CAT5e. Os cabos de ligação DIGITUS® garantem que a instalação do cabo está em conformidade com a especificação ISO & EN Channel e oferecem um excelente desempenho na cablagem DIGITUS® CAT5e. A série de cabos de ligação DIGITUS® CAT5e inclui diferentes cores e comprimentos para cobrir todas as necessidades. Cada conector está identificado com um comprimento e é ideal para utilização em routers, switches, servidores e outros componentes activos ou passivos. Os cabos são embalados individualmente num saco de polietileno e, por conseguinte, estão perfeitamente protegidos contra influências externas.

Padrões orientados para o futuro e qualidade de topo de gama para a sua rede.

- 2x ficha RJ45 (8P8C)
- Tiras com proteção contra dobras e alívio de tensão




- Designação do comprimento nas capotas
- 4 x 2 AWG 24/7, par entrançado
- Conductor: Cu

Attributes

- Assortment: Twisted Pair Patch Cables
- Configuration: crossover
- Connector 1: Modular RJ45 (8/8) plug
- Connector 2: Modular RJ45 (8/8) plug
- Packaging: DIGITUS Polybag
- Category: CAT 5e
- Shielding: SF-UTP, foil and braid shielding
- Length: 2 m
- Color: grey
- Jacket: PVC
- Slim Version: no
- Structure: 4 x 2 AWG 26/7, twisted pair
- Flat Version: no

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	180	13.92	46.00	33.00	28.00	42,504.00
Packaging Unit Inside	10	0.77	12.00	25.00	30.00	9,000.00
Packaging Unit Single	1	0.08	16.00	4.00	33.00	2,112.00
Net single without Packaging	1	0.06	200.00	1.20	1.30	288.80

More images:

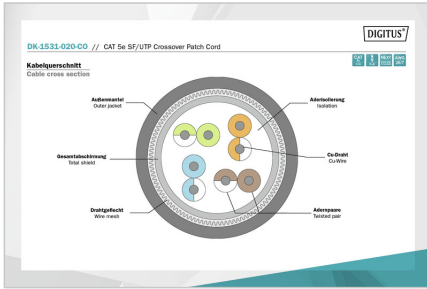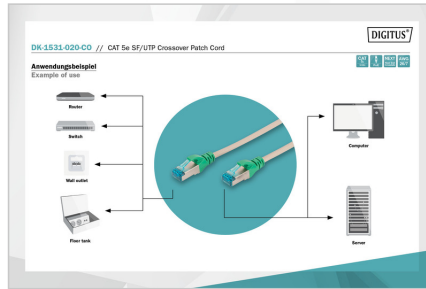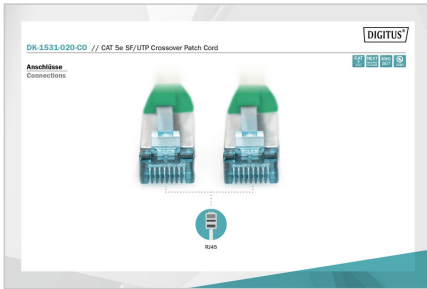

Safety notes

- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Cables must not be kinked sharply or bent at tight angles, as this can damage the inner wires and lead to failures.
- Make sure that the cables are not under tensile load, as this can damage the insulation and the wires inside the cable.
- Ensure that cables are not laid in areas where they can be easily damaged mechanically.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately to avoid failures, short circuits or even electric shocks.

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
 Auf dem Schüffel 3
 Lüdenscheid, Germany
<https://www.assmann.com>
info@assmann.com