




More images:




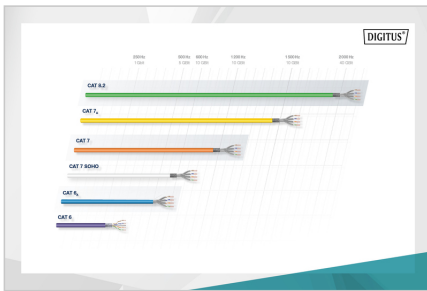


**Leistungsmerkmale Transmission Properties**

ITEM	UTP	STP	PL NEXT	ACR	PL ACK	RL	ELFEXT	PS ELFEXT
100	15.2	16.1	16.1	15.2	15.2	4.3	76	45.2
20	1	0.9	0.9	0.9	0.9	13.3	162	11.2
100	16.5	16.5	16.5	16.5	16.5	4.3	76	45.2
20	1	0.9	0.9	0.9	0.9	13.3	162	11.2

**Produktbeschreibung Product Information**

Technische Spezifikationen Technical Specifications	Physikalische Spezifikationen Physical Properties
<b>Standard</b> : TIA/EIA-568-B, ISO/IEC 11801-3, EN 50521-3 <b>Standard</b> : EN 50521-3, EN 50521-4, EN 50521-5, EN 50521-6, EN 50521-7, EN 50521-8, EN 50521-9, EN 50521-10, EN 50521-11, EN 50521-12, EN 50521-13, EN 50521-14, EN 50521-15, EN 50521-16, EN 50521-17, EN 50521-18, EN 50521-19, EN 50521-20, EN 50521-21, EN 50521-22, EN 50521-23, EN 50521-24, EN 50521-25, EN 50521-26, EN 50521-27, EN 50521-28, EN 50521-29, EN 50521-30, EN 50521-31, EN 50521-32, EN 50521-33, EN 50521-34, EN 50521-35, EN 50521-36, EN 50521-37, EN 50521-38, EN 50521-39, EN 50521-40, EN 50521-41, EN 50521-42, EN 50521-43, EN 50521-44, EN 50521-45, EN 50521-46, EN 50521-47, EN 50521-48, EN 50521-49, EN 50521-50, EN 50521-51, EN 50521-52, EN 50521-53, EN 50521-54, EN 50521-55, EN 50521-56, EN 50521-57, EN 50521-58, EN 50521-59, EN 50521-60, EN 50521-61, EN 50521-62, EN 50521-63, EN 50521-64, EN 50521-65, EN 50521-66, EN 50521-67, EN 50521-68, EN 50521-69, EN 50521-70, EN 50521-71, EN 50521-72, EN 50521-73, EN 50521-74, EN 50521-75, EN 50521-76, EN 50521-77, EN 50521-78, EN 50521-79, EN 50521-80, EN 50521-81, EN 50521-82, EN 50521-83, EN 50521-84, EN 50521-85, EN 50521-86, EN 50521-87, EN 50521-88, EN 50521-89, EN 50521-90, EN 50521-91, EN 50521-92, EN 50521-93, EN 50521-94, EN 50521-95, EN 50521-96, EN 50521-97, EN 50521-98, EN 50521-99, EN 50521-100	<b>Material</b> : PVC <b>Color</b> : Blue, Green, Orange, Brown <b>Length</b> : 100m <b>Weight</b> : 1.5kg

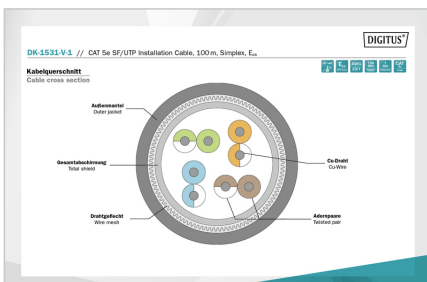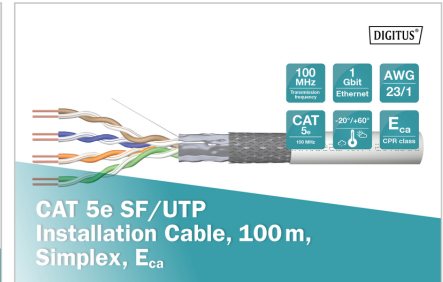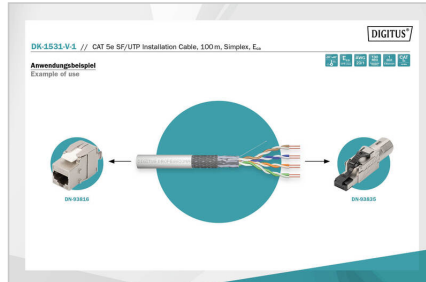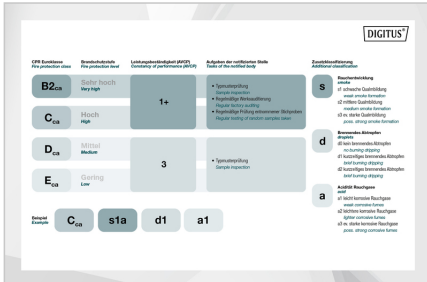

**Safety notes**

- Data cables must not be bent, stretched or twisted excessively. Sharp bends can damage the cable sheath and lead to failures or short circuits.
- Installation only by trained specialists.
- Installation only in dry rooms.
- The data cable must not be in direct contact with other electrical cables or high-voltage sources in order to avoid electromagnetic interference.

**EU responsible person**

EU based economic operator ensuring the product complies with the required regulations.  
 ASSMANN Electronic GmbH  
 Auf dem Schüffel 3  
 Lüdenscheid, Germany  
<https://www.assmann.com>  
 info@assmann.com