

DIGITUS® Power strip with aluminum profile, 12-outlet IEC C13, 2 m power cord with UK plug

DN-95463

EAN 4016032504023



1U PDU, 19", 10A, 12x IEC C13 Outlets, Switch 2 m Cable, UK Plug

DIGITUS® power strips are the perfect solution for your network or server cabinet. When it comes to power distribution, the PDU meets the requirements of many applications in IT, networking, laboratories, and even home use. The power strip can be mounted in the 19" section of the cabinet in a space-saving 1U configuration.

Reliable and professional power supply in the 482.6 mm (19") range

- Horizontal 19" Rack Installation
- Housing: Aluminum profile
- Plastic components made of ABS UL-94V-0
- Input: UK plug
- Output: 12 x IEC 60320 C13 power outlets, max. 10 A per outlet
- Power cord: Cable cross-section: 1.5 mm², Length: 2 m
- Rated current: 10 A
- Rated voltage: 230–250 VAC, 50/60 Hz

- Mounting length: 461.6 mm
- Dimensions: 482.6 mm (19") x 45 (1U) x 45 mm (H x W x D)

Attributes

- El. snaga: 3,6 kVA
- Faze: 1 fazni
- Izlazni priključci: IEC 60320 C13
- Struja: 16 A
- Ugrađivanje: Stalak 1U
- Volti: 230 V
- Inčni faktor oblika (IEC 60297): 482,6 mm (19")


Package contents

- What's Included: 1x power strip
- 2 mounting brackets
- 1x Safety Instructions

Logistics

	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm ³
Packaging Unit Carton	10	10.70	34.50	54.50	29.00	54,527.20
Packaging Unit Inside	1	1.07	0.00	0.00	0.00	0.00
Packaging Unit Single	1	1.07	7.00	14.50	54.50	5,531.75
Net single without Packaging	1	0.85	4.50	4.50	48.30	0.00

More images:

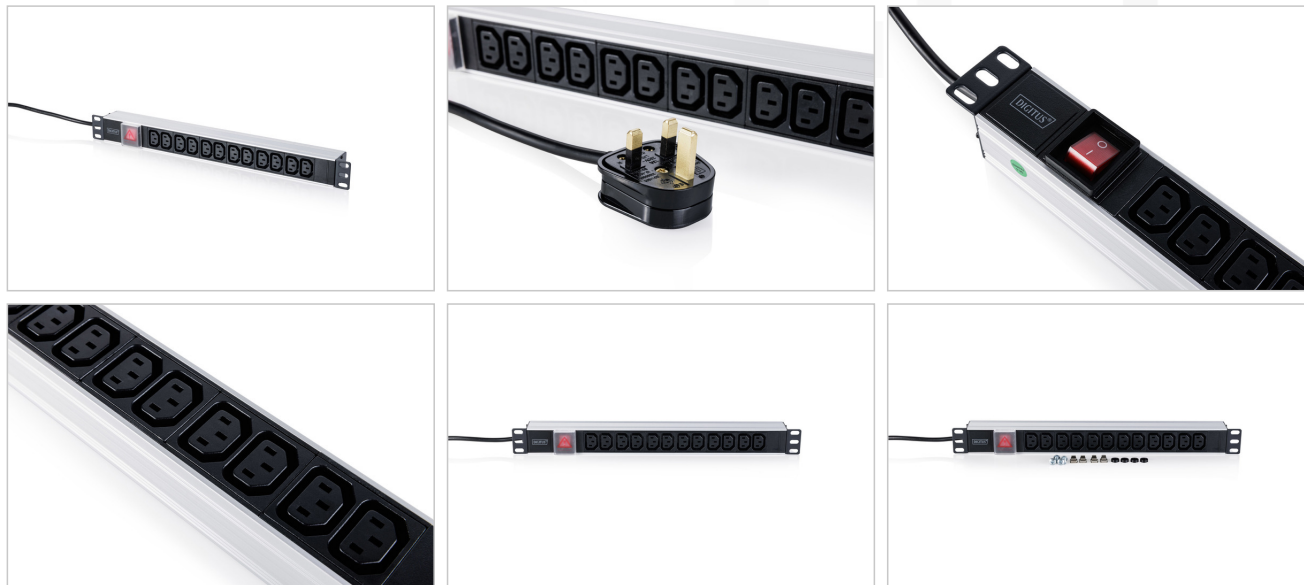

Safety notes

- This product is not intended for unsupervised use by children or persons under their care!
- Prevent higher humidity or temperatures than those specified in the data sheet - Avoid moisture, dust or vapors, solvents, flammable gases.
- Multiple sockets are not designed for permanent use with heavy loads!
- Multiple sockets must not be cascaded (avoid stringing together several multiple sockets).
- The maximum connected load must not be exceeded.
- Defective multiple sockets must be taken out of service immediately and disposed of in an environmentally friendly manner.
- In the event of a fault, take the product out of operation and contact a qualified electrician.
- Do not open the product.
- Disconnect the product from the power supply before cleaning. Do not use any aggressive or abrasive cleaning agents for cleaning.
- The ingress of liquids can lead to a short circuit.

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
Auf dem Schöffel 3
Lüdenscheid, Germany
<https://www.assmann.com>
info@assmann.com