

# DIGITUS USB GaN Charger 140W, 3x USB-C, 1x USB-A

**DA-10305**  
**EAN 4016032505853**



## USB GaN Charger, 140W 3x USB-C, 1x USB-A, White

The 140 W GaN II Charger with sturdy holder and four ports is the ideal solution for modern workstations with high energy requirements. Equipped with three USB-C ports (140 W, 100 W and 65 W max.) and one USB-A port (22.5 W max.), you can charge your laptop, tablet, smartphone and more at the same time. With up to 130 W total power in dual-port mode, up to 115 W in triple-port mode and up to 110 W when all ports are fully utilized. Whether in the office, home office, co-working space or at university: the 140 W USB charger is the ideal solution if you want to charge several devices simultaneously, safely and efficiently in a professional environment. Even two notebooks are no problem. With the practical stand, you can place the charger on your desk to save space. The modern GaN II technology (Gallium Nitride) enables high efficiency, compact design and reliable charging results. Manufactured from 30% recycled PCR material (post consumer recycling) and packaged 100% plastic-free, the device combines technological performance with a sustainable claim. No compromises are made in terms of performance or durability. Universally applicable for smartphones, tablets, notebooks and other USB devices - the 140 W GaN II Charger is the smart solution if you want maximum performance, clever technology and sustainability in one device.

### The 140 W GaN II Charger with practical holder and four connections charges laptops, tablets and smartphones simultaneously - the ideal solution for workstations with high energy requirements.

- Maximum power with single connection: USB-C1 max. 140W, USB-C2 max. 100W, USB-C3 max. 65W, USB-A max. 22.5W
- Multi-device charging (2 port) USB-C1/C2 + USB-C2/C3: 65 W max. each.

- Multi-device charging (2 port) USB-C1/USB-C2 + USB-A: 100W + 18 W max.
- Multi-device charging (3 port) USB-C3 + USB-A: 7.5 W + 7.5 W max.
- Multi-device charging (3 port) USB-C1 + USB-C2 + USB-C3: 65W + 30W + 20W max.
- Multi-device charging (3 port) USB-C1 + USB-C2 + USB-A: 65W + 30W + 18W max.
- Multi-device charging (3 port) USB-C1 + USB-C3 + USB-A: 100W + 7.5W + 7.5W max.
- Multi-device charging (3 port) USB-C2 + USB-C3 + USB-A: 100W + 7.5W + 7.5W max.
- Multi-device charging (4 port) USB-C1 + USB-C2 + USB-C3 + USB-A: 65W + 30W + 7.5W + 7.5W max.
- GaN II technology (gallium nitride) for high efficiency, low heat generation and compact design
- Plastic housing made from 30% recycled PCR material
- Plastic-free packaging
- Protection against overcurrent, short circuits and overheating
- Input voltage/rated current/frequency: 100-240V / 2.5A / 50/60Hz
- Average active efficiency: 84.70 %
- Power consumption in standby: 0.29W
- Product color: White
- Dimensions: 7.2 x 7.2 x 3.0 cm
- Weight: 303.6 g

### Attributes

- Style: Charger/Power supply


### Package contents

- USB charger
- Mains cable (1.5m)
- Operating instructions

### Logistics

	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm <sup>3</sup>
Packaging Unit Carton	20	9.90	27.00	50.00	18.00	24,300.00
Packaging Unit Inside	10	4.95	24.00	25.00	16.00	9,600.00
Packaging Unit Single	1	0.50	12.00	16.50	4.50	891.00
Net single without Packaging	1	0.32	7.20	3.00	7.30	0.00

## More images:

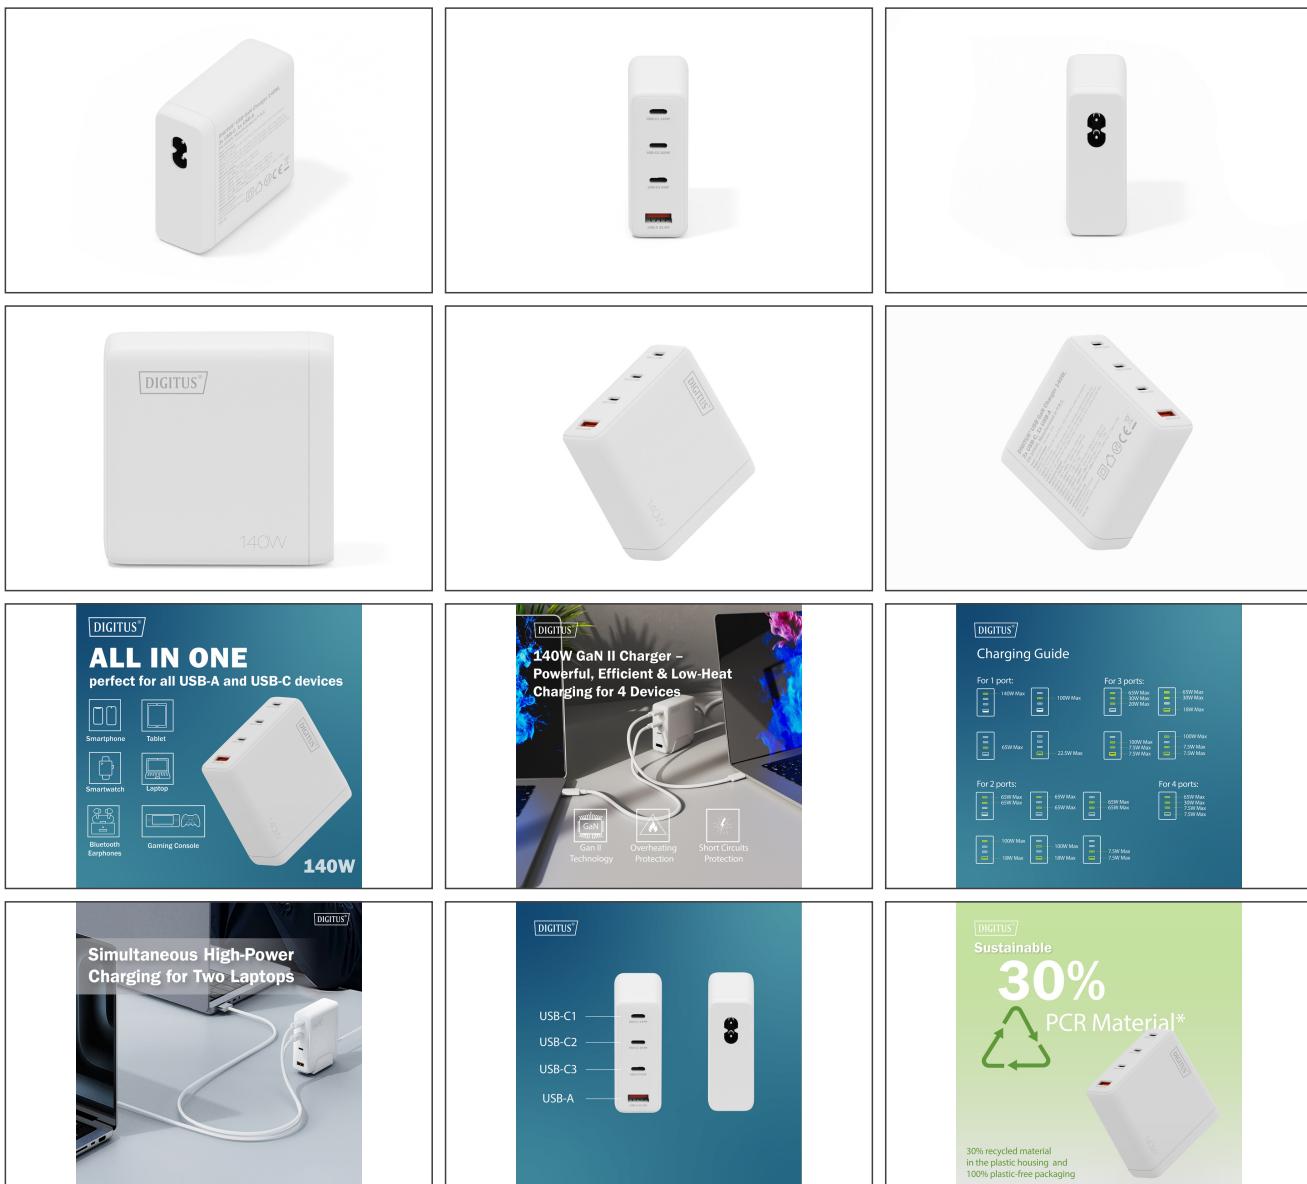

## Safety notes

- Use charging adapters or power supply units in accordance with the instructions in the operating instructions to ensure optimum performance.
- Connect the charging adapter to an easily accessible socket in the voltage range between 100-240 V AC.
- Disconnect the charging adapter from the socket after use.
- Do not use the charging adapter with electronic devices that are outside the specifications of the charging adapter.
- Do not expose the device to rain, moisture, vapors or liquids.
- Do not insert any objects into the device.
- Do not attempt to repair the unit or open the housing without authorization. You risk an electric shock!
- Ensure adequate ventilation to prevent damage due to overheating.
- Dust, moisture, vapors and strong cleaning agents or solvents can cause damage to the device.
- Disconnect the appliance from the power supply and the connected devices before cleaning.
- Clean the device with a dust-free cloth.

## EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH  
Auf dem Schüffel 3  
Lüdenscheid, Germany  
<https://www.assmann.com>  
[info@assmann.com](mailto:info@assmann.com)