DIGITUS® 140W USB GaN Charger, 3x USB-C, 1x USB-A

DA-10305

EAN 4016032505853



USB GaN Charger,140W 3x USB-C, 1x USB-A, White

The 140 W GaN II charger, featuring a sturdy mount and four ports, is the ideal solution for modern workplaces with high power demands. Equipped with three USB-C ports (140 W, 100 W, and 65 W max.) and one USB-A port (22.5 W max.), you can charge your laptop, tablet, smartphone, and more at the same time. In dual-port mode, it delivers up to 130 W of total power; in triple-port mode, up to 115 W; and when all ports are in use, up to 110 W. Whether in the office, at home, in a coworking space, or at the university: The 140 W USB charger is the ideal solution if you want to charge multiple devices simultaneously, safely, and efficiently in a professional setting. Even two laptops are no problem. With the convenient stand, you can set up the charger on your desk to save space. Modern GaN II technology (gallium nitride) enables high efficiency, a compact design, and reliable charging performance. Manufactured from 30% recycled PCR material (post-consumer recycling) and packaged in 100% plastic-free packaging. And there's no compromise on performance or durability. Universally compatible with smartphones, tablets, laptops, and other USB devices—the 140 W GaN II Charger is the smart solution if you want maximum performance and cutting-edge technology in a single device.

The 140 W GaN II charger, featuring a convenient mount and four ports, charges laptops, tablets, and smartphones simultaneously—the ideal solution for workstations with high power demands.

- Maximum power per port: USB-C1 max. 140W, USB-C2 max. 100W, USB-C3 max. 65W, USB-A max. 22.5W
- Multi-Device Charging (2 Ports) USB-C1/C2 + USB-C2/C3: 65 W max. each
- Multi-Device Charging (2 Ports) USB-C1/USB-C2 + USB-A: 100 W + 18 W max.
- Multi-Device Charging (3 Ports) USB-C3 + USB-A: 7.5 W + 7.5 W max.
- Multi-Device Charging (3 Ports) USB-C1 + USB-C2 + USB-C3: 65W + 30W + 20W max.
- Multi-Device Charging (3 Ports) USB-C1 + USB-C2 + USB-A: 65W + 30W + 18W max.
- Multi-Device Charging (3 Ports) USB-C1 + USB-C3 + USB-A: 100W + 7.5W + 7.5W max.
- Multi-Device Charging (3 Ports) USB-C2 + USB-C3 + USB-A: 100W + 7.5W + 7.5W max.
- Multi-Device Charging (4 Ports) USB-C1 + USB-C2 + USB-C3 + USB-A: 65W + 30W + 7.5W + 7.5W max.
- GaN II technology (gallium nitride) for high efficiency, low heat generation, and a compact design
- Plastic housing made from 30% recycled PCR material
- Plastic-free packaging
- Protection against overcurrent, short circuits, and overheating
- Input Voltage/Rated Current/Frequency: 100–240 V / 2.5 A / 50/60 Hz
- Average active efficiency: 84.70%
- Power consumption in standby mode: 0.29 W
- Product Color: White
- Dimensions: 7.2 x 7.2 x 3.0 cm
- Weight: 323 g

Attributes

- Style: Charger/Power supply
- Type: Notebook

Package contents

- USB charger
- Power cord (1.5 m)
- User Manual

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	20	9.90	27.00	50.00	18.00	24,300.00
Packaging Unit Inside	10	4.95	24.00	25.00	16.00	9,600.00
Packaging Unit Single	1	0.50	12.00	16.50	4.50	891.00
Net single without Packaging	1	0.32	7.20	3.00	7.20	0.00

More images:















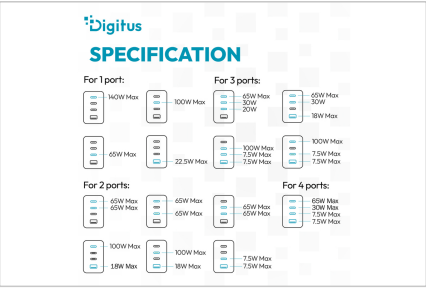

Safety notes

- Use charging adapters or power supply units in accordance with the instructions in the operating instructions to ensure optimum performance.
- Connect the charging adapter to an easily accessible socket in the voltage range between 100-240 V AC.
- Disconnect the charging adapter from the socket after use.
- Do not use the charging adapter with electronic devices that are outside the specifications of the charging adapter.
- Do not expose the device to rain, moisture, vapors or liquids.
- Do not insert any objects into the device.
- Do not attempt to repair the unit or open the housing without authorization. You risk an electric shock!
- Ensure adequate ventilation to prevent damage due to overheating.
- Dust, moisture, vapors and strong cleaning agents or solvents can cause damage to the device.
- Disconnect the appliance from the power supply and the connected devices before cleaning.
- Clean the device with a dust-free cloth.

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
Auf dem Schüffel 3
Lüdenscheid, Germany
https://www.assmann.com
info@assmann.com