

DIGITUS® 10" socket strip with aluminum profile, 4-way socket outlet with earthing contact, with switch

DN-95418-S

EAN 4016032508359



1U Aluminum PDU, 254 mm (10") rack mount, 4x safety outlet, Switch, 16A, 4000W, 250VAC 50/60Hz

The DIGITUS® power strips are the perfect solution for your network or server cabinet. In terms of power distribution, the PDU meets the requirements of many applications in IT, network technology, laboratories and the home. The power strip can be mounted in the 10" area of the cabinet in a space-saving 1U. Depending on the enclosure type, it is possible to mount the socket strip with the taps facing right or left.

Safe and professional power supply in the 10" range

- Horizontal 10" installation in the rack
- Output: appliance sockets 4 x socket outlet with earthing contact DIN 49440, max. 16 A per output
- Illuminated switch - secured against unintentional switch-off
- Switch with built-in overload protection
- Input: earthing contact plug CEE 7/7, 230 - 250 Vac / 16 A
- Supply cable: cable cross-section: 1.5 mm², length: 2 m
- Housing: Aluminum profile

- Plastic components made of ABS UL-94V-0
- Dimensions: 254 mm (10") x 45 (1U) x 45 mm (HxWxD)

Attributes


- Dodatne mogućnosti: Prekidač za uključivanje napona, Zaštita od preopterećenja
- El. snaga: 3,6 kVA
- Faze: 1 fazni
- Izlazni priključci: CEE 7/3
- Struja: 16 A
- Ugrađivanje: Stalak 1U
- Ulazni utikač: CEE7/7
- Volti: 230 V
- Inčni faktor oblika (IEC 60297): 254 mm (10")

Package contents

- 1 x 10" socket strip, 4-way socket outlet with earthing contact, with switch
- 2 x angle profiles for cabinet assembly

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	10	7.05	31.50	20.50	32.00	20,664.00
Packaging Unit Inside	1	0.71	0.00	0.00	0.00	0.00
Packaging Unit Single	1	0.71	5.80	9.70	30.50	1,715.93
Net single without Packaging	1	0.60	4.50	4.50	25.40	0.00

More images:

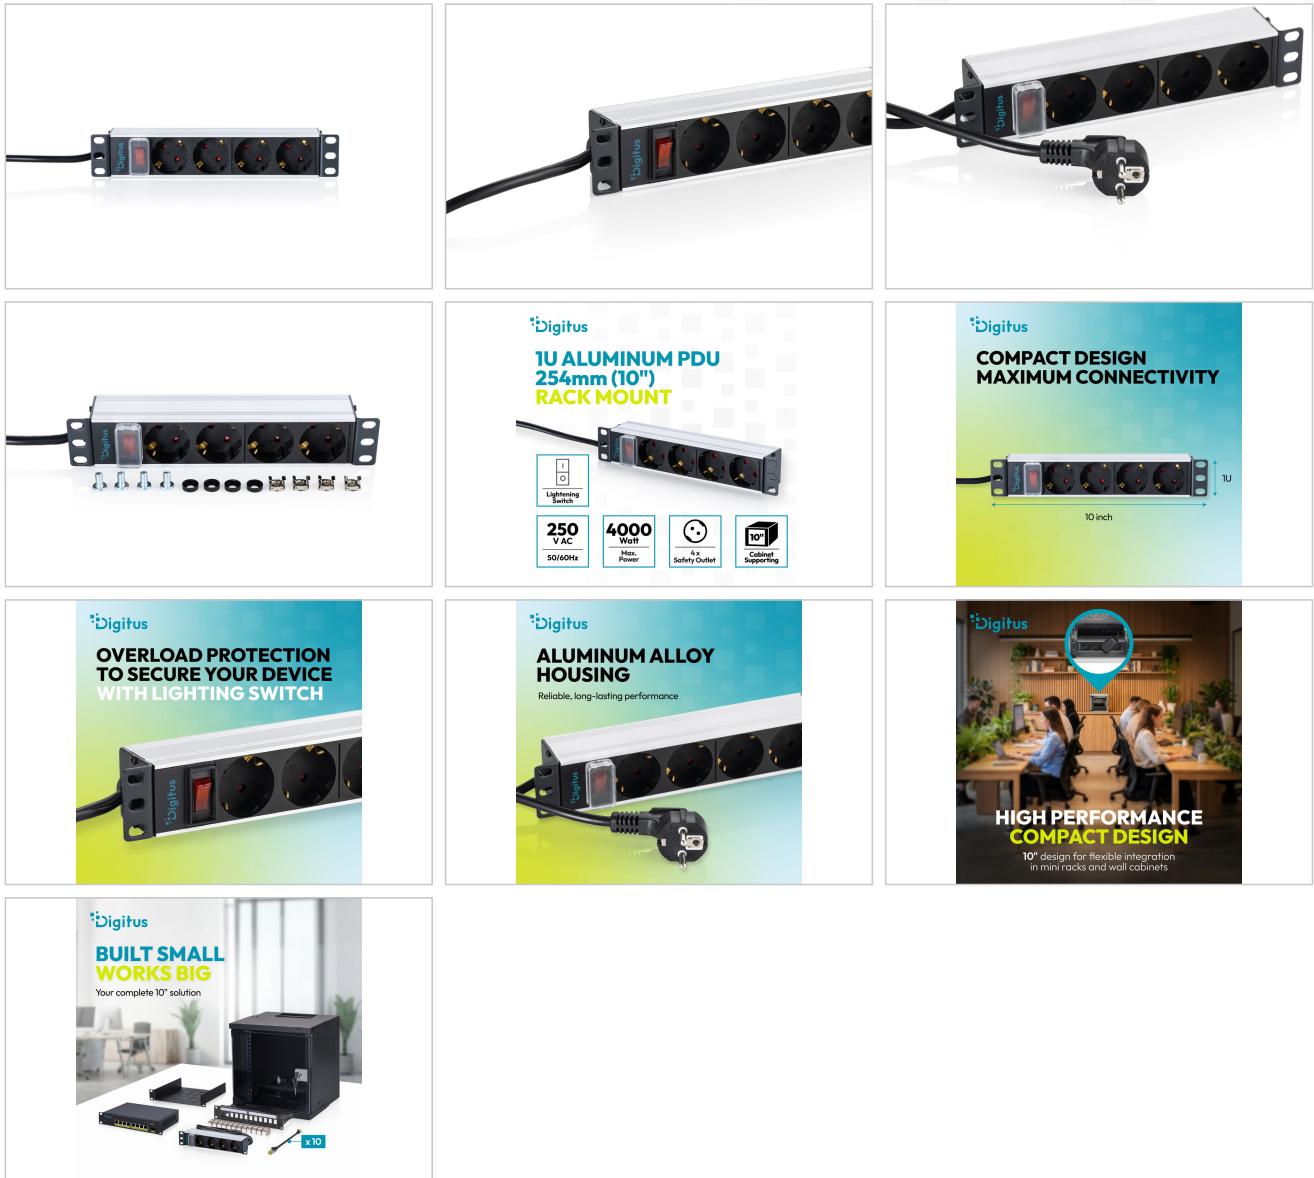

Safety notes

- This product is not intended for unsupervised use by children or persons under their care!
- Prevent higher humidity or temperatures than those specified in the data sheet - Avoid moisture, dust or vapors, solvents, flammable gases.
- Multiple sockets are not designed for permanent use with heavy loads!
- Multiple sockets must not be cascaded (avoid stringing together several multiple sockets).
- The maximum connected load must not be exceeded.
- Defective multiple sockets must be taken out of service immediately and disposed of in an environmentally friendly manner.
- In the event of a fault, take the product out of operation and contact a qualified electrician.
- Do not open the product.
- Disconnect the product from the power supply before cleaning. Do not use any aggressive or abrasive cleaning agents for cleaning.
- The ingress of liquids can lead to a short circuit.

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
Auf dem Schöffel 3
Lüdenscheid, Germany
<https://www.assmann.com>
info@assmann.com