

# DIGITUS® Socket strip with aluminum profile, 9-way socket outlet with earthing contact, 2 m supply cable with earthing contact plug

DN-95444

EAN 4016032508366



## 1U Aluminum PDU, rackmountable, 9x Safety outlet 16A, 4000W, 250VAC 50/60Hz,

The DIGITUS® power strips are the perfect solution for your 482.6 mm (19") network or server cabinet. Optimized for cabinet mounting, the DIGITUS® power strips with 220-240V at 50-60 Hz offer you the best performance with a suitable load. The 482.6 mm (19") mounting material supplied ensures optimum attachment to the profile rails of your cabinets. Each socket strip can be mounted horizontally or vertically and, depending on the cabinet type, it is possible to mount the socket strip with the taps facing upwards or downwards.

### Safe and professional power supply in the 482.6 mm (19") range

- Horizontal 19" installation in the rack
- Input: CEE 7/7, 230 - 250 V AC/ 16A
- Output: appliance sockets 9 x socket outlet with earthing contact, max. 16 A per output
- Supply cable: cable cross-section: 1.5 mm<sup>2</sup>, length: 2 m
- Rotation of the outlets: 45°

- Housing: Aluminum profile
- Plastic components made of ABS UL-94V-0r
- Dimensions: 482.6 mm (19") x 45 (1U) x 45 mm (HxWxD)

### Attributes


- Current: 16 A
- Input Plug: CEE7/7
- Installation: Rack 1U
- Outlets: CEE 7/3
- Phase: 1ph
- Power: 3,6 kVA
- Volts: 230 V
- Inch form factor (IEC 60297): 482.6 mm (19")

### Package contents

- 1 socket strip
- 2 mounting brackets
- 1 Safety instructions

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm <sup>3</sup>
Packaging Unit Carton	10	9.50	19.50	52.00	30.50	30,927.00
Packaging Unit Inside	1	0.95	5.80	9.70	51.00	2,869.26
Packaging Unit Single	1	0.95	5.80	9.70	51.00	2,869.26
Net single without Packaging	1	0.80	4.50	4.50	48.30	0.00

**More images:**

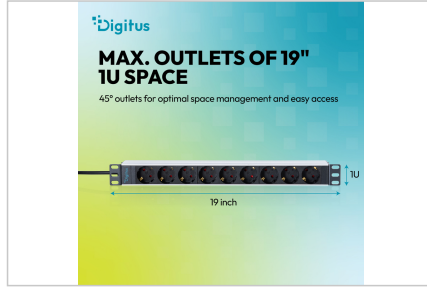

**Safety notes**

- This product is not intended for unsupervised use by children or persons under their care!
- Prevent higher humidity or temperatures than those specified in the data sheet - Avoid moisture, dust or vapors, solvents, flammable gases.
- Multiple sockets are not designed for permanent use with heavy loads!
- Multiple sockets must not be cascaded (avoid stringing together several multiple sockets).
- The maximum connected load must not be exceeded.
- Defective multiple sockets must be taken out of service immediately and disposed of in an environmentally friendly manner.
- In the event of a fault, take the product out of operation and contact a qualified electrician.
- Do not open the product.
- Disconnect the product from the power supply before cleaning. Do not use any aggressive or abrasive cleaning agents for cleaning.
- The ingress of liquids can lead to a short circuit.

**EU responsible person**

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH  
 Auf dem Schüffel 3  
 Lüdenscheid, Germany  
<https://www.assmann.com>  
[info@assmann.com](mailto:info@assmann.com)