

DIGITUS® KVM switch, 2-port, dual display, 4K, HDMI/DisplayPort

DS-12865

EAN 4016032510086



KVM Switch Dual Input HDMI+DP 2 HDMI+DP In, 2X HDMI Out. 4K60Hz, USB Hub, Audio

With the DIGITUS 2-port KVM switch for dual displays, you have the option of operating two 4K-capable PCs via a single USB keyboard and mouse combination. You can conveniently switch between the two PCs at the touch of a button or hotkey and save yourself the hassle of having to reconnect all the cables. Output to up to two monitors is via the integrated HDMI or DisplayPort output on the rear - ideal for mixed monitor environments in which both video standards are operated simultaneously. Audio signals from the microphone and speakers are also switched. There are also two USB 3.0 ports on the front, which can be used for additional peripheral devices such as USB sticks or printers on both PCs.

Operate two 4K-capable PCs via a single USB keyboard and mouse combination and conveniently switch between the two PCs at the touch of a button or hotkey.

- Inputs:
- 2× HDMI Type-A female (black)
- 2× DisplayPort Type-A female (black)
- 2× USB Type-B female (keyboard/mouse, per PC)
- 2× mini jack 3.5 mm black (audio + MIC, per PC)


- Outputs (console):
- 2× HDMI Type-A female (black)
- 1× USB Type-A female (keyboard)
- 1× USB Type-A female (mouse)
- 1× mini-jack 3.5 mm green (loudspeaker)
- 1× mini jack 3.5 mm pink (microphone)
- Front connections: 2× USB 3.0 Type-A (front)
- Max. Resolution: 4K@60Hz (3840×2160) at both outputs
- Switching: Front key / Hotkey (4 modes)
- Standard hotkey: [Ctrl]+[Ctrl] (can be switched to Scroll/Num/Caps)
- Front LEDs: Online (red), Active selected (green)
- Power supply: DC 5V/2A, socket 5.5×2.1 mm (optional)
- Housing: Aluminum alloy
- Dimensions (W×D×H): 161 × 105 × 78 mm
- Weight: 1.74 kg

Package contents

- KVM switch
- KVM cable set (1.8 m)
- User manual

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	12	21.88	46.70	38.00	44.40	78,792.20
Packaging Unit Inside	1	1.82	0.00	0.00	0.00	0.00
Packaging Unit Single	1	1.82	12.00	21.00	21.00	5,292.00
Net single without Packaging	1	0.54	6.00	10.50	16.10	0.00

More images:

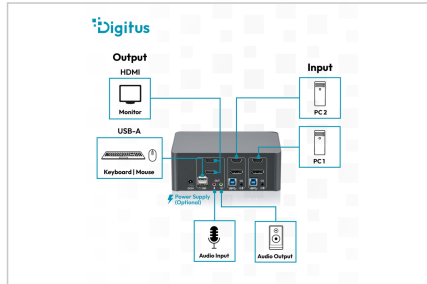

Safety notes

- Overloading can lead to overheating and damage to the appliance or the connected peripherals.
- If necessary, use an external power supply to ensure stable performance.
- If devices such as external hard disks or printers that require a high power consumption are connected, the device should be used with an external power supply. Otherwise, the device could be overloaded or functional problems could occur.
- Do not expose the device to rain, moisture, vapors or liquids.
- Do not insert any objects into the device.
- Do not attempt to repair the unit or open the housing without authorization. You risk an electric shock!
- Ensure adequate ventilation to prevent damage due to overheating.
- Dust, moisture, vapors and strong cleaning agents or solvents can cause damage to the device.
- Disconnect the appliance from the power supply and the connected devices before cleaning.
- Clean the device with a dust-free cloth.

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
Auf dem Schöffel 3
Lüdenscheid, Germany
<https://www.assmann.com>
info@assmann.com