DIGITUS® Patch holder for wall mounting for 483 mm (19") installations

DN-19 PB-4U-SW

EAN 4016032250371



4U wall mounting patch bracket, 195x505x250 mm adjustable depth, stackable, black (RAL 9005)

The patch holders for wall mounting are used to install 483 mm (19") components. Depending on individual space requirements, they are available in various height units. height units. The adjustable depth (from 250 mm up to 430 mm) enables the installation of larger components. A large punched-out area at the rear can be used for cable routing if the cables come directly out of the wall, for example.

- for the installation of 483 mm (19") components
- 1.1 - 1.5 thick sheet steel, powder-coated
- depth-adjustable (min. 250 mm; max. 430 mm)
- with four holes for wall mounting
- Back with cut-out for e.g: Cabling

Attributes

- Bočne ploče: Obje strane
- Boja: crna, RAL 9005
- Jedinice: 4
- Kapacitet opterećenja: 15 kg
- Prednja vrata: bez
- Širina: 505 mm
- Vrsta ormara: Wall Mounting Brackets
- IP klasa zaštite: bez
- Montirano: Ne

Package contents


- Fastening material for stacking


Logistics

	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	5	18.20	23.50	55.50	22.00	28,693.50
Packaging Unit Inside	1	3.64	20.50	53.00	4.00	4,346.00
Packaging Unit Single	1	3.64	20.50	53.00	4.00	4,346.00
Net single without Packaging	1	0.00	25.00	50.50	19.50	0.00

Druckfehler, Irrtümer und technische Änderungen sind vorbehalten. | Printing errors, falsities and technical changes remain reserved.

More images:

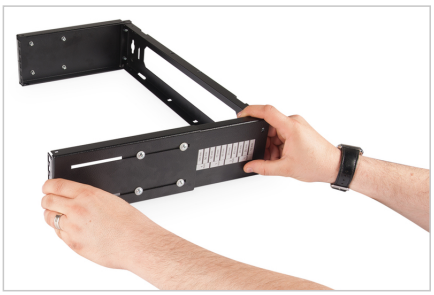

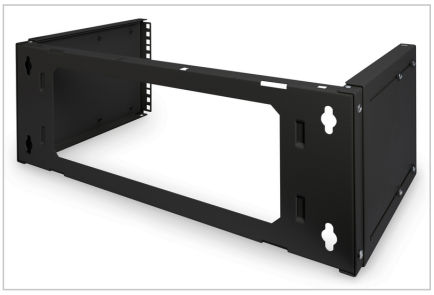





Safety notes

- Ensure adequate ventilation to prevent the installed devices from overheating.
- Network cabinets should not be overfilled and the ventilation openings must not be blocked.
- Cables should be neatly routed and organized in cable ducts or trays.
- Use surge protection devices to protect sensitive devices from power surges or lightning strikes.
- Avoid moisture or wetness while observing the respective IP protection class.
- Ensure that the cabinet and the devices used are properly earthed.
- In regions with frequent thunderstorm activity, professional lightning protection should be integrated into the power supply.
- To avoid uneven loading, always mount the heaviest units at the bottom of the cabinet.
- Disconnect the installed devices from the power supply during maintenance or installation work.

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
Auf dem Schüffel 3
Lüdenscheid, Germany
https://www.assmann.com
info@assmann.com