


DIGITUS® Cat.6 F/UTP raw installation cable, 305 m, simplex, Eca, PVC

DK-1621-V-305

EAN 4016032250555

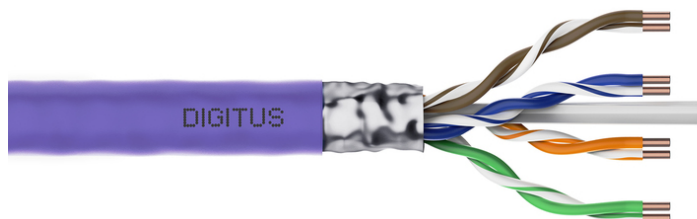

DIGITUS CAT 6 F-UTP installation cable, raw length 305m, paper box, AWG23/1, PVC, sx, grey

The Digitus Cat 6 F/UTP installation cable is designed for use in structured data centers and building cabling in accordance with ISO/IEC 11801, DIN EN 50288-5-1, DIN EN 50173, IEC 60332-1. The cable is ideal for the transmission of analog and digital data and supports POE and POE+.

Future-oriented standards and high-end quality for your network.

- Physical properties:
- Conductor: AWG 23/1, bare copper wire, nominal diameter 0.57 mm
- System(s) of assessment and verification of constancy of performance: System 3
- Insulation: HD-PE
- Total number of insulated conductors: 8, twisted into 4 pairs
- Color code: blue-white, orange-white, green-white, brown-white
- Pair shielding: none
- Overall shielding: Aluminum-laminated polyester film, covers 100%, two-wire
- Outer sheath: Halogen-free (FRNC-B/LSZH-1)
- Outer sheath thickness: 0.50 mm nominal
- Color: Grey
- Mechanical properties:
- Tensile load: 150N max.
- Dynamic bending radius: 8x AD mm min.
- Static bending radius: 4x AD mm min.
- Transport and storage temperature range: -20 °C to +60 °C

- Operating temperature range: -20 °C to +75 °C
- Installation temperature range: 0 °C to +50 °C
- Outer diameter: 7.0 mm nominal
- Flame retardancy: IEC 60332-1
- Halogen-free & smoke-tight: IEC 60754-2 & IEC 61034
- Fire load: 295 MJ/km
- Electrical properties:
- Average impedance: 100±50Ω at 1MHz - 600MHz
- Capacitance: 40 pF/m nominal @ 800 Hz
- Capacitance unbalance (pair-earth): 1.5 pF/m max. @ 1 KHz
- Insulation resistance: 5 GΩm x km min.
- Loop resistance: 147 Ω/km max. (2% max. resistance unbalance)
- Operating voltage: 72 Vdc max.
- Insertion loss: 40 dB
- Phase delay: 535 nS/100 m max.
- Time delay: 20 nS/100 m max.
- NVP: 69%






Attributes

- Asortiman: Instalacijski kabeli s upredenim paricama
- Kategorija: CAT 6
- Oklop: F-UTP, oklop od folije
- CPR: Eca
- Duljina: 305 m
- Boja: sivi
- Kapica: PVC
- Struktura: 4 x 2 AWG 23/1, kruto upletena parica

Logistics


	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	1	5.95	39.00	39.00	7.50	11,407.50
Packaging Unit Inside	1	5.95	39.50	38.00	27.50	41,277.50
Packaging Unit Single	1	5.95	39.50	38.00	27.50	41,277.50
Net single without Packaging	1	5.95	39.50	38.00	27.50	11,407.50

More images:

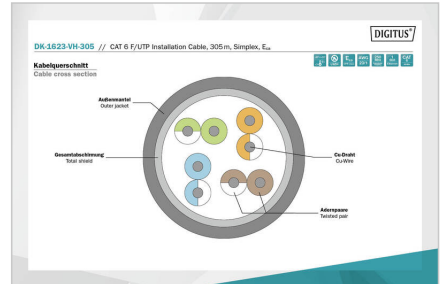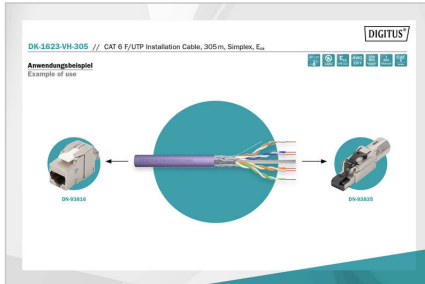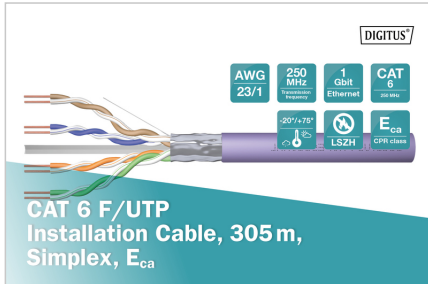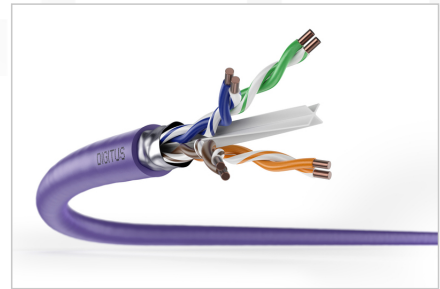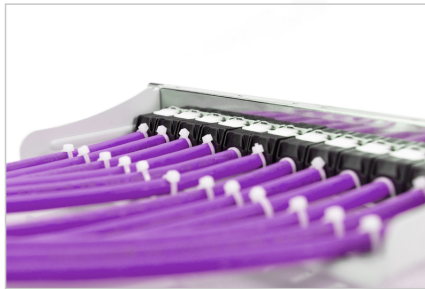

Produktinformationen / Product Information	
Produktname / Product Name	DK-1623-VH-305 // CAT 6 F/UTP Installation Cable, 305m, Simplex, Eca
Produktbeschreibung / Product Description	305m (1000ft) CAT 6 F/UTP Installation Cable, 305m, Simplex, Eca
Produkttyp / Product Type	Installation Cable
Produktfarbe / Product Color	Black
Produktlänge / Product Length	305m (1000ft)
Produktbreite / Product Width	12.5mm (0.5in)
Produktgewicht / Product Weight	0.5kg (1.1lb)
Produktmaterial / Product Material	PVC
Produktanwendung / Product Application	For use in indoor environments
Produktzertifizierung / Product Certification	CE, RoHS, REACH, CPN Class
Produktgarantie / Product Warranty	3 Years

Leistungseigenschaften / Performance Properties	
Parameter	Value
Bandwidth	250 MHz
Transfer Rate	1 Gbit/s
Impedance	100 Ohm
Attenuation	20 dB/100m
Return Loss	15 dB
Shielding Effectiveness	100 dB
Flame Retardancy	LSZH
Temperature Range	-40°C to +75°C
Humidity	10% to 90%
UV Resistance	Yes
RoHS	Yes
REACH	Yes
CPN Class	Class 1

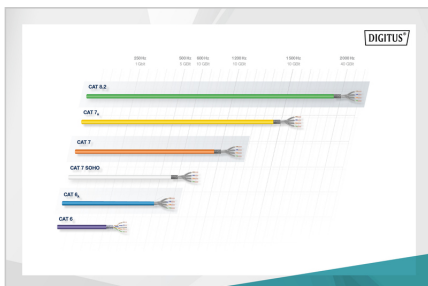

Leistungseigenschaften / Performance Properties	
Parameter	Value
Bandwidth	250 MHz
Transfer Rate	1 Gbit/s
Impedance	100 Ohm
Attenuation	20 dB/100m
Return Loss	15 dB
Shielding Effectiveness	100 dB
Flame Retardancy	LSZH
Temperature Range	-40°C to +75°C
Humidity	10% to 90%
UV Resistance	Yes
RoHS	Yes
REACH	Yes
CPN Class	Class 1



Safety notes

- Data cables must not be bent, stretched or twisted excessively. Sharp bends can damage the cable sheath and lead to failures or short circuits.
- Installation only by trained specialists.
- For indoor cables (LSZH jacket): Suitable only for installation in dry indoor environments.
- The data cable must not be in direct contact with other electrical cables or high-voltage sources in order to avoid electromagnetic interference.

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
Auf dem Schüffel 3
Lüdenscheid, Germany
<https://www.assmann.com>
info@assmann.com