

# DIGITUS 4x4 HDMI Matrix Switch, 4K/60Hz

DS-55511

EAN 4016032479314



## 4x4 HDMI Matrix Switch, 4K/60Hz 18 Gps, HDR, EDID, Downscaler, HDCP 2.2

With the DIGITUS® 4x4 HDMI Matrix Switch, you can choose between 4 HDMI signal sources and output signals to 4 different HDMI outputs independently or simultaneously. All HDMI ports can be assigned to different HDMI outputs or all HDMI outputs as desired. Convenient operation using remote control or on the device itself. The Matrix Switch also offers EDID management (changeover switch) and downscaling functionality so that 4K content can be output on Full HD displays without a problem.

### Distribute up to four different HDMI signals on up to four HDMI displays independently of one another with UHD resolutions up to 4K / 60Hz

- Supports 4K2K/60Hz (4:4:4)
- Video bandwidth: 18 Gbps
- HDCP 2.2 / 1.4
- HDMI 2.0
- EDID management (changeover switch)
- Supports downscaling of 4K contents on Full HD (1080p) displays
- HDR, HDR10, HDR10+, Dolby Vision
- Output of up to 4 HDMI signals on 4 HDMI monitors possible either simultaneously or independently




- Convenient switching between all HDMI connections using remote control or on the device itself
- Inputs:
- 4x HDMI (4K/60Hz, 4:4:4, 18 Gbps)
- 1x Power adapter input (DC 12V/2.5A) - Connection for external power adapter
- 1x Micro USB input - Service/remote maintenance update
- Outputs:
- 4x HDMI (4K/60Hz, 4:4:4, 18 Gbps)
- ESD protection
- Suitable for wall mounting
- Operating temperature: 0-40°
- Power consumption: approx. 11.04 W
- Housing: Metal
- Dimensions: L 10.5 x W 22 x H 1.9 cm
- Weight: 535 g
- Color: Black

### Package contents

- 1x 4x4 HDMI Matrix Switch
- 1x Power adapter (DC 12V/2.5A, 1.45 m)
- 1x IR remote control
- 2x Mounting plate
- 1x User manual

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm <sup>3</sup>
Packaging Unit Carton	10	5.40	0.00	0.00	0.00	0.00
Packaging Unit Inside	1	0.54	0.00	0.00	0.00	0.00
Packaging Unit Single	1	0.54	0.00	0.00	0.00	0.00
Net single without Packaging	0	0.00	0.00	0.00	0.00	240.66

**More images:**

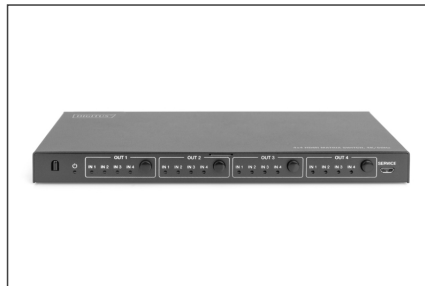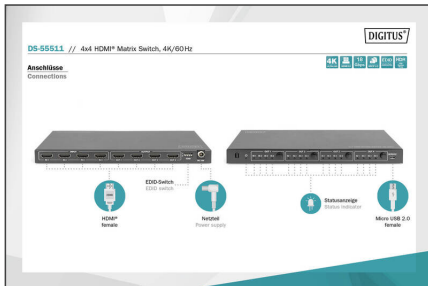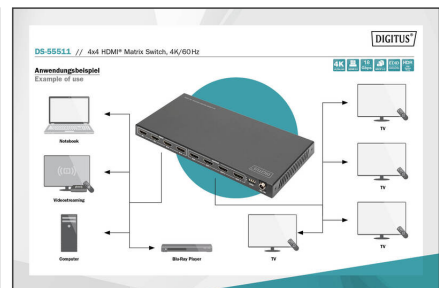

**Safety notes**

- If the device is powered by a plug-in power supply, ensure that the power adapter is connected correctly and meets the specified requirements (e.g. voltage and current).
- Only use certified CAT5e or CAT6 cables to ensure stable signal transmission.
- For particularly long cable runs or in environments prone to interference, it is recommended to use shielded network cables.
- Make sure that all connections are tight and secure to avoid loose contacts that could affect the signal quality. Make sure that the HDMI and Ethernet connections are properly connected.
- Make sure that the CAT cable is not laid close to high-voltage lines or other strong sources of electromagnetic interference in order to avoid signal interference.
- Only operate the device within the specified temperature range.
- Do not use the device outdoors or in damp or wet environments
- Check all connections and cables regularly for wear or damage. Cables and connections can wear out, especially with frequent use or long installations, which can lead to poor signal quality or system failure.

**EU responsible person**

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH  
Auf dem Schüffel 3  
Lüdenscheid, Germany  
<https://www.assmann.com>  
[info@assmann.com](mailto:info@assmann.com)