

# DIGITUS® Notebook charger USB-C, 65W

DA-10071

EAN 4016032482680



### Notebook Charger USB-C Power supply 65W PD3.0

The DIGITUS USB-C PD Notebook Power Adapter is a super slim and compact replacement for defective or lost original power adapters. It is also ideally suited for use as a second power adapter in the office, for travel, or at home. The 65W PD3.0 charger has been developed for notebooks, smartphones, tablets and gaming consoles with a USB Type-C connection. Notebooks and the powder adapter itself are protected against short circuits, overheating, surges and excess current.

**Compact replacement for defective or lost original power adapters and perfectly suited for use as a second power adapter for travel, in the office or at home.**

- Charger with 1.2m charging cable and USB-C connection
- Compatible with the latest notebooks that are charged via USB-C
- Compatible with the latest smartphones and tablets that are charged via USB-C

- Input voltage: 100 - 240 V AC, 50/60 Hz
- Output voltage: 5V/3A, 9V/3A, 12V/3A, 15V/3A, 20V/3.25A
- Surge protection / excess current protection / short circuit protection
- Housing: Fire-resistant material
- Dimensions: L 65.5 x W 65.5 x H 29 mm
- Color: black
- Weight: 186g

#### Attributes


- Style: Charger/Power supply
- Type: Notebook

#### Package contents

- 1x Notebook charger USB-C
- QIG (Quick Installation Guide)

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	32	4.48	0.00	0.00	0.00	0.00
Packaging Unit Inside	1	0.14	0.00	0.00	0.00	0.00
Packaging Unit Single	1	0.14	0.00	0.00	0.00	0.00
Net single without Packaging	0	0.00	0.00	0.00	0.00	56.88

**More images:**

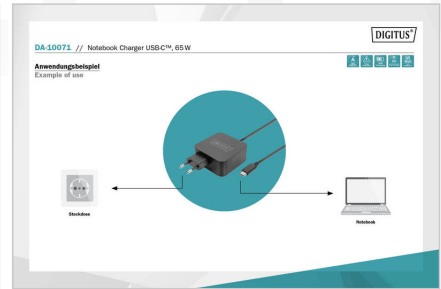

**Safety notes**

- Use charging adapters or power supply units in accordance with the instructions in the operating instructions to ensure optimum performance.
- Connect the charging adapter to an easily accessible socket in the voltage range between 100-240 V AC.
- Disconnect the charging adapter from the socket after use.
- Do not use the charging adapter with electronic devices that are outside the specifications of the charging adapter.
- Do not expose the device to rain, moisture, vapors or liquids.
- Do not insert any objects into the device.
- Do not attempt to repair the unit or open the housing without authorization. You risk an electric shock!
- Ensure adequate ventilation to prevent damage due to overheating.
- Dust, moisture, vapors and strong cleaning agents or solvents can cause damage to the device.
- Disconnect the appliance from the power supply and the connected devices before cleaning.
- Clean the device with a dust-free cloth.

**EU responsible person**

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH  
 Auf dem Schüffel 3  
 Lüdenscheid, Germany  
<https://www.assmann.com>  
[info@assmann.com](mailto:info@assmann.com)