

DIGITUS® Socket Strip with Aluminum Profile, 9-way, IEC C14 input

DN-95429

EAN 4016032483557



1U Aluminum PDU, rackmountable, 9 x C13 10A, 230VAC, 50/60Hz, IEC C14 inlet, 10 A Fuse

The DIGITUS® socket strips are the perfect solution for your network or server cabinet. With regard to current distribution, the PDU fulfills the requirements of many applications in IT, network technology and laboratories. The PDU can be used ideally with your input connector IEC60320 C13 as additional 19" distribution for UPS.

Safe and professional current supply in the 482.6 mm (19") range

- Horizontal 19" installation in the rack
- 10A input fuse protects against excess voltage
- Housing: Aluminum profile
- Plastic components made of ABS UL-94V-0
- Input: IEC60320 C14, 230 Vac / 10 A
- Output: Device socket 9 x IEC60320 C13, max. 10 A per output

- Dimensions: 482.6 (19") x 45 (1U) x 45 mm (HxWxD)

Attributes


- Additional Features: Overload protection
- Current: 10 A
- Input Plug: IEC 60320 C14 inlet
- Installation: Rack 1U
- Outlets: IEC 60320 C13
- Phase: 1ph
- Power: 2,3 kVA
- Volts: 230 V
- Inch form factor (IEC 60297): 482.6 mm (19")

Package contents

- Scope of delivery: 1 socket strip, 2 mounting brackets; 1 safety instructions

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	10	6.50	0.00	0.00	0.00	0.00
Packaging Unit Inside	1	0.65	0.00	0.00	0.00	0.00
Packaging Unit Single	1	0.65	0.00	0.00	0.00	0.00
Net single without Packaging	0	0.00	0.00	0.00	0.00	933.15

More images:

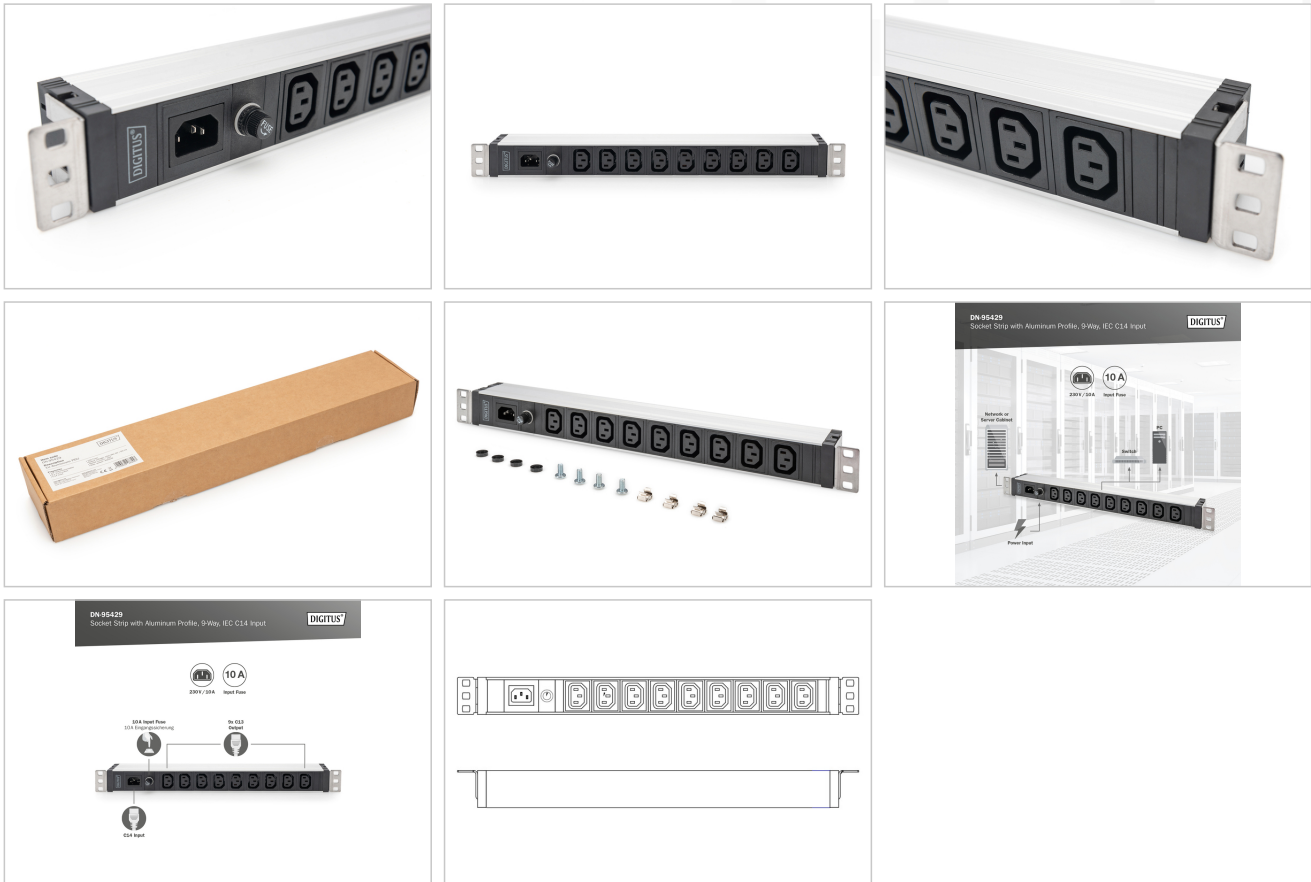

Safety notes

- This product is not intended for unsupervised use by children or persons under their care!
- Prevent higher humidity or temperatures than those specified in the data sheet - Avoid moisture, dust or vapors, solvents, flammable gases.
- Multiple sockets are not designed for permanent use with heavy loads!
- Multiple sockets must not be cascaded (avoid stringing together several multiple sockets).
- The maximum connected load must not be exceeded.
- Defective multiple sockets must be taken out of service immediately and disposed of in an environmentally friendly manner.
- In the event of a fault, take the product out of operation and contact a qualified electrician.
- Do not open the product.
- Disconnect the product from the power supply before cleaning. Do not use any aggressive or abrasive cleaning agents for cleaning.
- The ingress of liquids can lead to a short circuit.

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
 Auf dem Schüffel 3
 Lüdenscheid, Germany
<https://www.assmann.com>
info@assmann.com