

DIGITUS® Wireless HDMI receiver for DS-55328

DS-55329

EAN 4016032491255



4K Wireless HDMI Receiver (RX) additional unit for DS-55328

With this additional receiver unit, you can expand the 4K Wireless HDMI KVM Extender Set (DS-55328) to up to 4 receivers (output devices). Distribute your AV signals wirelessly to up to 4 screens.

Expand the 4K Wireless HDMI KVM Extender Set (DS-55328) to up to 4 receivers (output devices)

- Point-to-multipoint connection - 1x transmitter (source) + up to 4x receivers (output device)
- Touch Screen Back Control - Supports touch panels (via USB connection on the receiver)
- Radio channel: IEEE 802.11.b/g/n/ac
- Frequency band: Dual band, 2.4/5G
- Compression: H.265
- Latency: approx. 100 ms
- AES 128 bit encryption
- Authentication protocol: WPA2 (WPAS-PSK / WPA2-Enterprise)
- HDMI version: 2.0
- Receiver unit connections:
- 1x HDMI output (output device, 4K/60Hz max.)
- 2x USB-A input (connection of mouse/keyboard/touch panel)
- 1x USB-C input - power supply connection (5V/2A)

- 1x reset button
- 1x on/off switch
- Housing: Metal
- Color: black
- Dimensions: W 15.4 x D 7.75 x H 2.1 cm
- Weight: 330 g
- Power consumption (1 unit): approx. 5W
- Operating temperature: 0-40°C
- Manufacturer's instructions:
- The transmission distance with limited visibility cannot be determined across the board and depends on the conditions on site
- Walls, glass, etc. shorten the signal coverage or cause signal loss

Attributes


- KVM: no
- PoE (Power over Ethernet): no

Package contents

- 1x receiver unit
- 1x USB power adapter (5V/2A)
- 1x USB-A to USB-C cable (1.5 m)
- 1x HDMI connection cable (1.5 m)
- 1x QIG

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm ³
Packaging Unit Carton	20	6.54	0.00	0.00	0.00	0.00
Packaging Unit Inside	1	0.33	0.00	0.00	0.00	0.00
Packaging Unit Single	1	0.33	0.00	0.00	0.00	0.00
Net single without Packaging	0	0.00	0.00	0.00	0.00	325.00

More images:

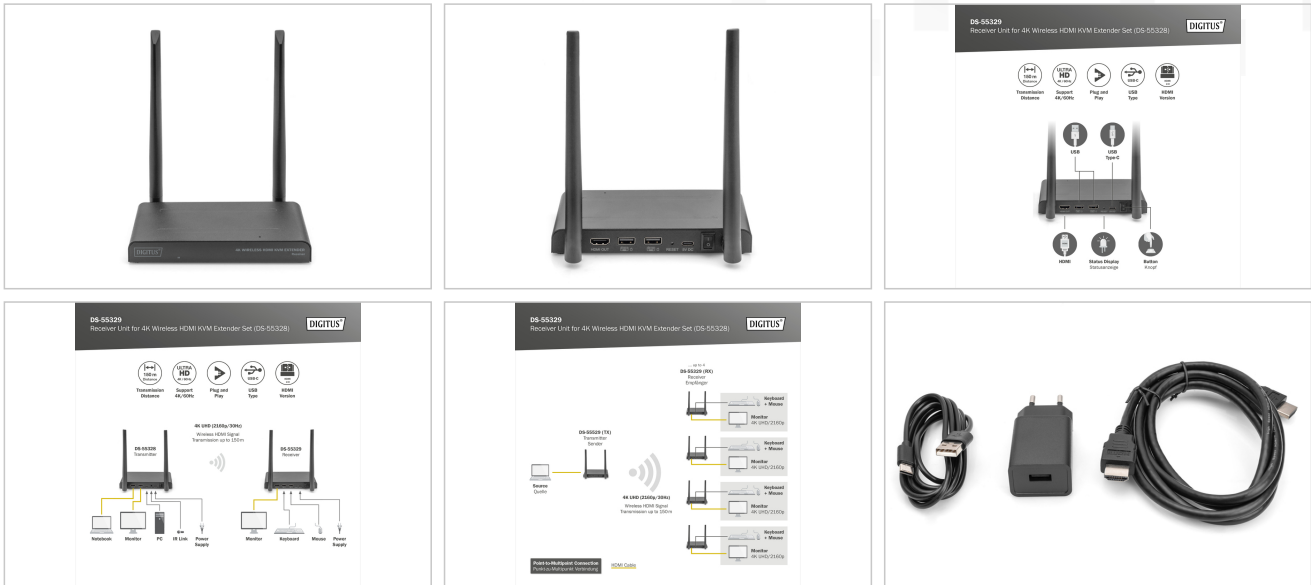

Safety notes

- If the device is powered by a plug-in power supply, ensure that the power adapter is connected correctly and meets the specified requirements (e.g. voltage and current).
- Only use certified CAT5e or CAT6 cables to ensure stable signal transmission.
- For particularly long cable runs or in environments prone to interference, it is recommended to use shielded network cables.
- Make sure that all connections are tight and secure to avoid loose contacts that could affect the signal quality. Make sure that the HDMI and Ethernet connections are connected correctly.
- Make sure that the CAT cable is not laid near high-voltage power lines or other strong sources of electromagnetic interference to avoid signal interference.
- Only operate the device within the specified temperature range.
- Do not use the device outdoors or in damp or wet environments
- Check all connections and cables regularly for wear or damage. Cables and connections can wear out, especially with frequent use or long installations, which can lead to poor signal quality or system failure.

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
 Auf dem Schüffel 3
 Lüdenscheid, Germany
<https://www.assmann.com>
info@assmann.com