

DIGITUS® aluminum outlet strip with switch, 7 safety outlets, 2 m supply safety plug

DN-95402

EAN 4016032266402



1U Aluminum PDU, rackmountable, 7x safety outlet 16A, 4000W, 250VAC 50/60Hz, switch

The DIGITUS® power distribution units are the perfect solution for you 482.6 mm (19") network- or server cabinet. Optimized for rack installation with 220-240V 50-60 Hz the DIGITUS® PDU offer you the best performance with qualified efficiency. The 482.6 mm (19") fixing material provides an optimized enclosing on the profile rails of your cabinets. Every PDU can be mounted horizontally as well as vertically and has the possibility, according to the cabinet, to be mounted faced up or down.

Safe and professional power in the 482.6 mm (19") range

- 7x socket outlets with earthing contact 250VAC 50/60Hz / 16A / 4000W
- Aluminum profile
- 2x angle profiles for cabinet assembly
- 2 m supply cable H05VV-F 35 1.5 mm² with earthing contact plug

- Plastic components made of ABS UL-94V-0
- Earthing on the aluminum profile
- Sockets with earthing contact rotated by 45°
- Illuminated switch - secured against unintentional switch-off



Attributes

- Dodatne mogućnosti: Prekidač za uključivanje napona
- El. snaga: 3,6 kVA
- Faze: 1 fazni
- Izlazni priključci: CEE 7/3
- Struja: 16 A
- Ugrađivanje: Radna površina, Stalak OU, Stalak 1U
- Ulazni utikač: CEE7/7
- Volti: 230 V
- Inčni faktor oblika (IEC 60297): 482,6 mm (19")

Logistics

	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm ³
Packaging Unit Carton	10	10.50	51.00	49.50	41.50	104,767.00
Packaging Unit Inside	1	1.05	6.70	50.00	9.10	3,048.50
Packaging Unit Single	1	1.05	6.70	50.00	9.10	3,048.50
Net single without Packaging	0	0.77	4.40	48.20	4.40	933.15

More images:

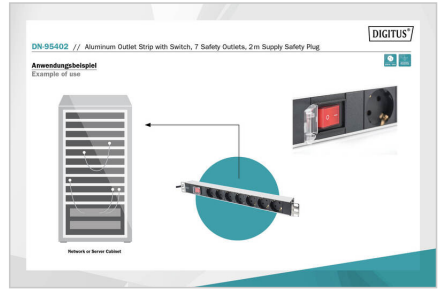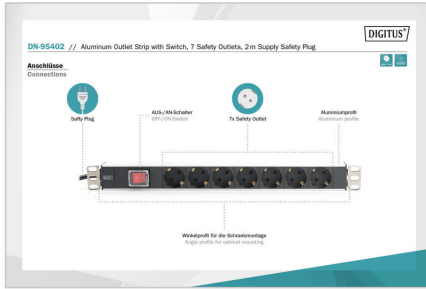

Safety notes

- This product is not intended for unsupervised use by children or persons under their care!
- Prevent higher humidity or temperatures than those specified in the data sheet - Avoid moisture, dust or vapors, solvents, flammable gases.
- Multiple sockets are not designed for permanent use with heavy loads!
- Multiple sockets must not be cascaded (avoid stringing together several multiple sockets).
- The maximum connected load must not be exceeded.
- Defective multiple sockets must be taken out of service immediately and disposed of in an environmentally friendly manner.
- In the event of a fault, take the product out of operation and contact a qualified electrician.
- Do not open the product.
- Disconnect the product from the power supply before cleaning. Do not use any aggressive or abrasive cleaning agents for cleaning.
- The ingress of liquids can lead to a short circuit.

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
 Auf dem Schüffel 3
 Lüdenscheid, Germany
<https://www.assmann.com>
info@assmann.com