

# DIGITUS® Aluminijski razvodni panel sa 3 utičnice, 2 m kabela i utikačem

DN-95411

EAN 4016032280712



## KABEL 220/3, Digitus, 10" DN-95411-D 3x safety outlet, 16A, 4000W, 250VAC 50/60Hz

DIGITUS® naponski razvodni paneli idealno su rješenje za Vaše 10" komunikacijske ormare. Optimizirani su za rack ugradnju, napajanje je 220-240V 50-60 Hz te nude najbolje performanse i učinkovitost. 10" dodatni pribor za fiksiranje osigurava optimalnu ugradnju opreme na vertikalnim nosačima Vaših ormara. Naponski razvodni paneli mogu se montirati na nekoliko načina: vodoravno, horizontalno, prema gore ili prema dolje, ovisno o potrebi.

### Sigurno i profesionalno napajanje u 10" izvedbi

- 3 utičnice 250VAC 50/60Hz / 16A / 4000W
- Aluminijски profil
- 2 profila pod kutom za montažu u ormaru
- 2 m kabela H05VV-F 3G1,5 mm<sup>2</sup> sa utikačem

- Plastične komponente proizvedene su od ABS UL-94V-0
- Aluminijски profil je uzemljen
- Utičnice pod kutom 35°
- Utičnice pod kutom 35°



### Attributes

- El. snaga: 3,6 kVA
- Faze: 1 fazni
- Izlazni priključci: CEE 7/3
- Struja: 16 A
- Ugrađivanje: Stalac OU, Stalac TU
- Ulazni utikač: CEE7/7
- Volti: 230 V
- Inčni faktor oblika (IEC 60297): 254 mm (10")

### Logistics

	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm <sup>3</sup>
Packaging Unit Carton	20	13.80	48.00	37.00	31.50	55.94
Packaging Unit Inside	1	0.69	12.00	29.00	5.30	1,844.40
Packaging Unit Single	1	0.69	12.00	29.00	5.30	1,844.40
Net single without Packaging	0	0.49	4.60	24.40	4.60	516.30

**More images:**

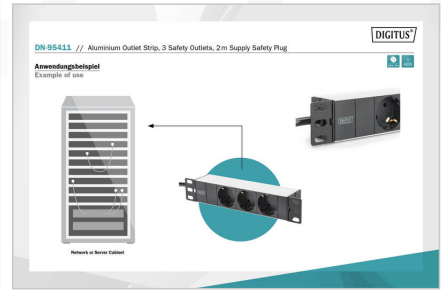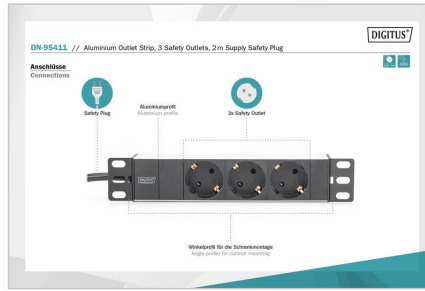

**Aluminium Outlet Strip,  
3 Safety Outlets,  
2m Supply Safety Plug**



**Safety notes**

- This product is not intended for unsupervised use by children or persons under their care!
- Prevent higher humidity or temperatures than those specified in the data sheet - Avoid moisture, dust or vapors, solvents, flammable gases.
- Multiple sockets are not designed for permanent use with heavy loads!
- Multiple sockets must not be cascaded (avoid stringing together several multiple sockets).
- The maximum connected load must not be exceeded.
- Defective multiple sockets must be taken out of service immediately and disposed of in an environmentally friendly manner.
- In the event of a fault, take the product out of operation and contact a qualified electrician.
- Do not open the product.
- Disconnect the product from the power supply before cleaning. Do not use any aggressive or abrasive cleaning agents for cleaning.
- The ingress of liquids can lead to a short circuit.

**EU responsible person**

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH  
 Auf dem Schüffel 3  
 Lüdenscheid, Germany  
<https://www.assmann.com>  
[info@assmann.com](mailto:info@assmann.com)