


# DIGITUS® Pigtails LC Simplex OM3 de cor sólida

DK-25332-02/3

EAN 4016032263005

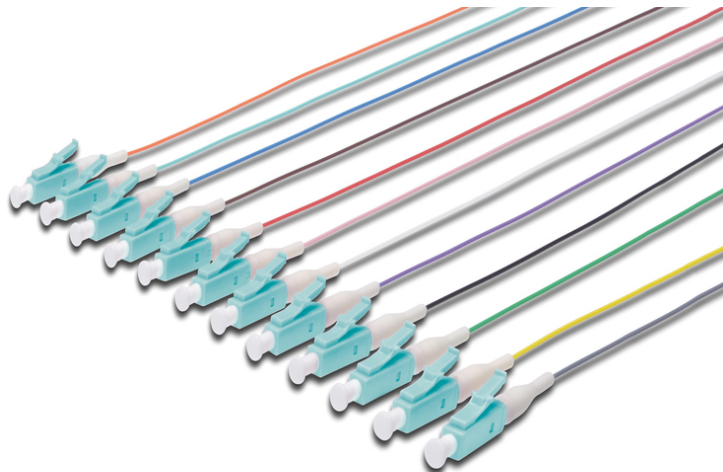

## Conjunto de pigtails de fibra ótica, 12 peças, LC, MM OM3 50/125 µ tampão solto, código de cor DIN IEC 304, 2 m

Os pigtails de fibra ótica DIGITUS® estão disponíveis nas versões LC Simplex, SC Simplex e ST Simplex e oferecem-lhe um desempenho e uma qualidade de ligação excepcionais para a sua rede com as classes OS2, OM2, OM3 e OM4. O conector está em conformidade com a norma IEC 61754-4 2002 e está equipado com uma virola de cerâmica de zircónio. Os conjuntos de fibras coloridas estão codificados por cores de acordo com a norma IEC 304 (branco, violeta, turquesa, preto, vermelho, rosa, laranja, cinzento, verde, amarelo, castanho, azul).

### Padrões orientados para o futuro e qualidade de topo de gama para a sua rede.

- Pigtails OM3 simplex, LC 2 m
- Conectores de acordo com a norma IEC 61754-4 2002
- Temperatura de funcionamento: -25 °C ... +80 °C
- Gama de temperaturas de transporte e armazenamento: -20 °C ... +65 °C
- Perda de inserção MM PC: máx. 0,4 dB

- Perda de retorno MM PC: > 25 dB
- Virola de cerâmica de zircónio
- Dimensões do revestimento secundário: Ø 0,9 ± 0,1 mm
- Revestimento primário: acrilatos; Ø 250 ± 15 µm
- Conjuntos de fibras coloridas de acordo com a norma IEC 304 nas cores: Branco, violeta, turquesa, preto, vermelho, rosa, laranja, cinzento, verde, amarelo, castanho, azul
- 12 unidades como unidade de embalagem
- Tampão solto

### Attributes

- Boot: single-color
- Cable jacket: LSOH
- Connector 1: LC
- Fiber class: OM3
- Fiber diameter: 50/125µ
- Mode: Multimode
- Length: 2 m

### Logistics

	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm <sup>3</sup>
Packaging Unit Carton	160	8.33	41.00	41.00	28.00	47,068.00
Packaging Unit Inside	20	1.04	19.00	19.00	12.00	4,332.00
Packaging Unit Single	1	0.05	17.00	17.00	1.00	289.00
Net single without Packaging	1	0.05	15.00	15.00	1.00	0.00

### Safety notes

- Avoid direct contact with light sources: Fiber optic cables, especially those with active light sources such as lasers (e.g. in optical communication systems), can emit dangerous radiation that can damage
- eyes. Take care never to look directly into the light of an optical fiber, even if the light source is invisible to the naked eye.
- When working with fiber optic cables, especially during tests or when working with lasers, protective goggles should always be worn to protect against

harmful radiation.

- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Do not kink or crush: Fiber optic cables are sensitive to mechanical stress.
- To protect cables from physical damage, they should be laid in special ducts or with protective materials
- Keep cable connectors clean: Fiber optic cables are sensitive to dust and dirt. Even small particles on the connectors can severely impair the signal quality.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately.

**EU responsible person**

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH  
Auf dem Schüffel 3  
Lüdenscheid, Germany  
<https://www.assmann.com>  
[info@assmann.com](mailto:info@assmann.com)