

DIGITUS® Gigabit Ethernet PoE Ultra Injector, 802.3af/at, 60 W

DN-95104

EAN 4016032375944



Gigabit Ethernet PoE+ Injector, 802.3at Power Pins:4/5(+),7/8(-) and 3/6(+), 1/2(-), 60W

The Digitus PoE Injector allows you to minimize cabling during installation of PoE-ready devices such as IP network cameras. Data supply and power supply to the devices is accomplished using a single Ethernet cable. This makes laying a separate power cable unnecessary and allows you to extend your network to places where there are no outlets or power cables. The Injector is fully compliant with the IEEE802.3at Ultra PoE standard and delivers an output power of 60 W.

Reduce cabling for Wireless APs, IP Phone and any PoE-ready device

- Complies with the 802.3at Ultra PoE and 802.3af PoE standards
- Easily merge of power and data cables into a single cable
- Extend your network to places where there are no power supply cables or sockets available
- no setup needed
- Supports all IEEE 802.3at-compliant PoE devices (such as access points, VoIP telephones, and IP cameras)
- Transmission range of up to 100 m – with an additional PoE extender, this can be increased to up to 400 m
- Own consumption: 1,6W max

- Internal consumption (full loaded): 10 W max.
- Input: 1x RJ-45 (data)
- Output: 1x RJ-45 (power and data)
- Data output: 100/100/1000 Mbps Gigabit
- Power output: 60 W
- Output voltage: 55 V DC
- Operating temperature range: -10 °C to +45 °C
- Dimensions: 193 mm x 85 mm x 41 mm
- Weight: 380 g
- The output is equipped with a current limit, a short-circuit fuse and automatic terminal device recognition and classification.

Attributes


- PoE Power budget: 60 W
- PoE standard: IEEE802.3at (PoE+)
- Ethernet speed: Gigabit
- Industrial usage: no

Package contents

- PoE Injector
- QIG (quick installation guide)
- Power Supply

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	40	24.10	52.50	30.00	44.00	69.30
Packaging Unit Inside	1	0.60	21.00	14.00	5.00	1.47
Packaging Unit Single	1	0.60	21.00	14.00	5.00	1.47
Net single without Packaging	0	0.42	19.30	8.50	4.00	656.20

More images:

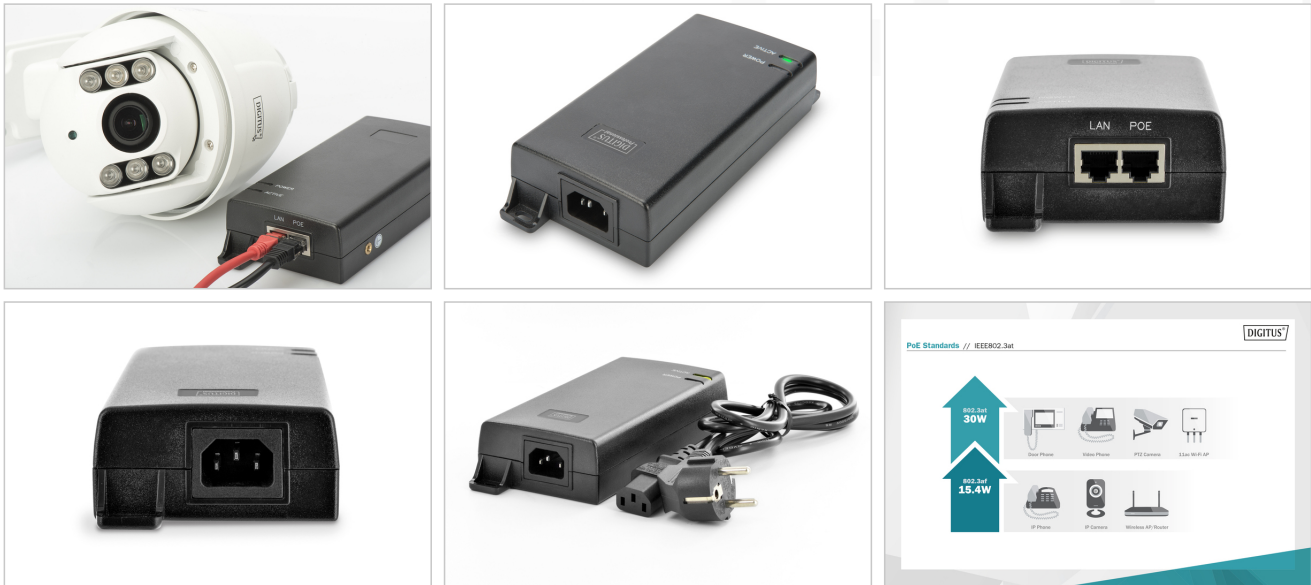

Safety notes

- This product is intended for indoor use only.
- Read all instructions and follow all warnings and instructions on the device.
- Do not place this appliance on an unstable surface (such as a trolley, stand, table, etc.).
- Do not use this appliance near water.
- Do not place this appliance near or above a radiator.
- The housing is equipped with openings for heat dissipation and ventilation. To prevent overheating during operation, the ventilation openings must not be blocked or covered.
- Do not place the appliance on a soft surface (e.g. bed, sofa, blanket, etc.). This will block the ventilation.
- The appliance must not be installed in a closed environment if adequate ventilation is not guaranteed.
- Do not spray any liquids onto the appliance.
- Disconnect the mains plug before cleaning. Do not use any liquid or foam cleaners.
- Clean the appliance with a damp cloth.
- Connect the device according to the power supply on the rating plate.
- To prevent damage to the appliance, it is important that all appliances are properly earthed.
- Do not place any objects on the power cable and lay it in such a way as to avoid tripping hazards.
- Use a surge protector, a regulator or an uninterruptible power supply (UPS) to protect your system from sudden, temporary and reduced power.
- Secure the system cable and mains cable properly and ensure that no objects are pressing on the cable.
- Do not insert any objects into the appliance through the openings in the housing. There is a risk of a short circuit, which can lead to fire or electric shock.
- Do not attempt to repair the appliance yourself. Always contact an authorized customer service centre.
- If any of the following conditions occur, unplug the appliance and return it to an authorized service centre for repair
 - The mains cable, power supply unit or plug for the power supply is damaged or worn;
 - Liquid has penetrated the appliance;
 - The device has been exposed to rain or water;
 - The device has been dropped or the housing has been damaged;
 - The function of the device has obviously changed;
- The appliance cannot be operated as described in the operating instructions.

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
 Auf dem Schüffel 3
 Lüdenscheid, Germany
<https://www.assmann.com>
info@assmann.com