

DIGITUS® DIGITUS IEC C13

DN-95404

EAN 4016032266426



1U Aluminum PDU, rackmountable, 10x IEC C13 10A, 2500W, 250VAC 50/60Hz, overl-prot.,1xC14

DIGITUS® – 19" Rackmountable PDU with 10x IEC C13 outlets, 10A current, 2500W power, 250VAC voltage, 50/60Hz frequency, overl-prot., 1xC14 input plug. Input Plug: IEC 60320 C14 inlet

- 10 IEC C13 outlets 250 V 50/60 Hz / 10 A / 2500 W
- 2x H05VV-F 35 mm² (2x) 1.5 mm² C14
- 2x H05VV-F 35 mm² (2x) 1.5 mm² C14
- 2x H05VV-F 35 mm² (2x) 1.5 mm² C14
- 2x H05VV-F 35 mm² (2x) 1.5 mm² C14
- 2x H05VV-F 35 mm² (2x) 1.5 mm² C14
- 2x H05VV-F 35 mm² (2x) 1.5 mm² C14
- 2x H05VV-F 35 mm² (2x) 1.5 mm² C14
- 2x H05VV-F 35 mm² (2x) 1.5 mm² C14
- 2x H05VV-F 35 mm² (2x) 1.5 mm² C14

- 10x IEC C13 outlets

Attributes





- Current: 10 A
- Input Plug: IEC 60320 C14 inlet
- Installation: Rack 1U
- Outlets: IEC 60320 C13
- Phase: 1ph
- Power: 2,3 kVA
- Volts: 230 V
- Inch form factor (IEC 60297): 482.6 mm (19")

Package contents

- Scope of delivery: 1 socket strip, 2 mounting brackets; 1 safety instructions

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm ³
Packaging Unit Carton	10	15.00	29.50	19.50	52.00	29,913.00
Packaging Unit Inside	1	1.50	5.80	9.70	51.50	2,897.39
Packaging Unit Single	1	1.50	5.80	9.70	51.50	2,897.39
Net single without Packaging	1	0.90	4.40	48.20	4.50	0.00

More images:

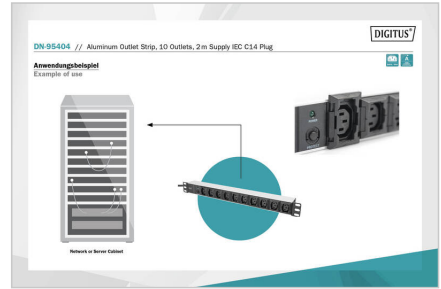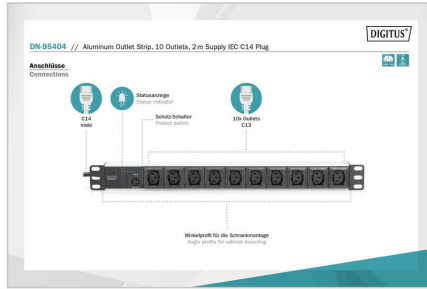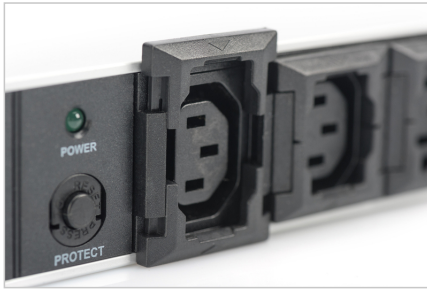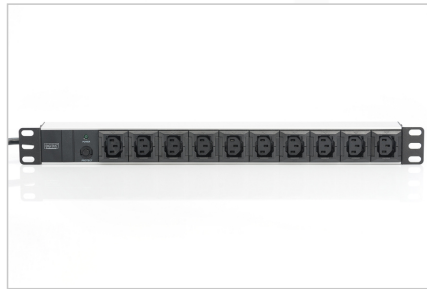

Safety notes

- This product is not intended for unsupervised use by children or persons under their care!
- Prevent higher humidity or temperatures than those specified in the data sheet - Avoid moisture, dust or vapors, solvents, flammable gases.
- Multiple sockets are not designed for permanent use with heavy loads!
- Multiple sockets must not be cascaded (avoid stringing together several multiple sockets).
- The maximum connected load must not be exceeded.
- Defective multiple sockets must be taken out of service immediately and disposed of in an environmentally friendly manner.
- In the event of a fault, take the product out of operation and contact a qualified electrician.
- Do not open the product.
- Disconnect the product from the power supply before cleaning. Do not use any aggressive or abrasive cleaning agents for cleaning.
- The ingress of liquids can lead to a short circuit.

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
 Auf dem Schüffel 3
 Lüdenscheid, Germany
<https://www.assmann.com>
info@assmann.com