

# DIGITUS® CAT 3 ISDN Patch Panel, unshielded, grey

DN-91325-1

EAN 4016032269007



## CAT 3 ISDN Patch Panel, unshielded, 25-port RJ45, 8P4C, LSA, 1U, rack mount, grey, 482x44x109

The ISDN Patch Panels from DIGITUS® are available as 25- or 50-port version. With 1.5 mm galvanized cold-rolled steel they are perfectly suitable for 19" rack mounting.

### Future-oriented standards and high-end quality for your network.

- Suitable for 483 mm (19") rack mount
- Suitable for cables with AWG 22-26 diameter
- Material housing: SECC, 1.5 mm electrogalvanized, cold-rolled steel acc. EN1.4301, UNS S30400, AISI 304 and LMSAD110
- RJ45 female, 8P4C
- Unshielded RJ45 jacks
- Material contacts: Phosphor bronze
- Contacts coating: Nickel, gold plated 0,3µ

- Cable installation via LSA strips, color coded according to EIA/TIA 568 A & B
- Material IDC Terminal: Phosphor bronze with 50 µ tin plated over 60 µ nickel plated
- Material PCB: FR4, UL 94V-0, multilayer 1.45 mm thickness
- Insertion force:  $\approx$  30 N
- Mating cycles:  $\approx$  750 (ISO/IEC 11801, IEC 60603-7-5)
- Operating temperature: -20°C ... +70°C
- Current carrying capacity: 1A at 50 °C
- Isolation resistance > 500MΩ
- Color: Grey (RAL 7035)


### Attributes

- Color: light grey, RAL 7035
- Ports: 25
- Units: 1
- Category: CAT 3

## Logistics

	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	10	14.46	53.50	32.00	28.00	47,936.00
Packaging Unit Inside	1	1.45	5.20	51.30	14.80	3,948.05
Packaging Unit Single	1	1.45	51.50	5.50	10.50	2,974.12
Net single without Packaging	1	0.96	10.00	48.20	4.30	5,610.00

**More images:**

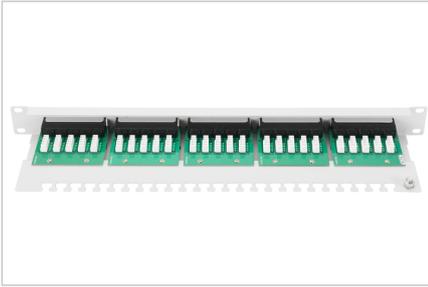

**Safety notes**

- Protect product from moisture
- Avoid antistatic charging when installing the product
- Observe the specifications of the raw cable manufacturer during installation

**EU responsible person**

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH  
Auf dem Schüffel 3  
Lüdenscheid, Germany  
<https://www.assmann.com>  
[info@assmann.com](mailto:info@assmann.com)