

DIGITUS® 8-Port High Speed HDMI Repeater HDMI

DS-55901

EAN 4016032269014



HDMI High Speed Repeater, Full HD, 1080p Bandwidth 225MHz, wall mountable

- 8-Port High Speed HDMI Repeater, Full HD, 1080p Bandwidth 225MHz, wall mountable
- 8-Port High Speed HDMI Repeater, Full HD, 1080p Bandwidth 225MHz, wall mountable
- 8-Port High Speed HDMI Repeater, Full HD, 1080p Bandwidth 225MHz, wall mountable
- 8-Port High Speed HDMI Repeater, Full HD, 1080p Bandwidth 225MHz, wall mountable
- 8-Port High Speed HDMI Repeater, Full HD, 1080p Bandwidth 225MHz, wall mountable
- 8-Port High Speed HDMI Repeater, Full HD, 1080p Bandwidth 225MHz, wall mountable
- 8-Port High Speed HDMI Repeater, Full HD, 1080p Bandwidth 225MHz, wall mountable
- 8-Port High Speed HDMI Repeater, Full HD, 1080p Bandwidth 225MHz, wall mountable

- 8-Port High Speed HDMI Repeater, Full HD, 1080p Bandwidth 225MHz, wall mountable

Attributes

- 8-Port High Speed HDMI Repeater, Full HD, 1080p Bandwidth 225MHz, wall mountable
- Distance: 35 m
- KVM: no
- PoE (Power over Ethernet): no

Package Contents

- 8-Port High Speed HDMI Repeater, Full HD, 1080p Bandwidth 225MHz, wall mountable
- 8-Port High Speed HDMI Repeater, Full HD, 1080p Bandwidth 225MHz, wall mountable

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm ³
Packaging Unit Carton	96	14.40	46.00	40.00	26.00	47,840.00
Packaging Unit Inside	1	0.15	5.00	9.00	8.50	382.50
Packaging Unit Single	1	0.15	5.00	9.00	8.50	382.50
Net single without Packaging	1	0.07	2.80	5.00	4.80	0.00

More images:




VIDEO VERLÄNGERUNGEN
VIDEO EXTENSIONS

M = Meter / meters

Model	Resolution	Distance
DS-55960-1	1080P	30 M
DS-55961	1080P	30 M
DS-55962	1080P	30 M
DS-55400	1080P / 720P	100 M
DS-55200	1080P	100 M
DS-55100	1080P	100 M

Model	Resolution	Distance
DS-55960-1	1080P	30 M
DS-55200	1080P	100 M
DS-55400	1080P / 720P	100 M
DS-55400	1080P / 720P	100 M
DS-55400	1080P / 720P	100 M

Model	Resolution	Distance
DS-54601	1080P	30 M
DS-54101	1080P	30 M

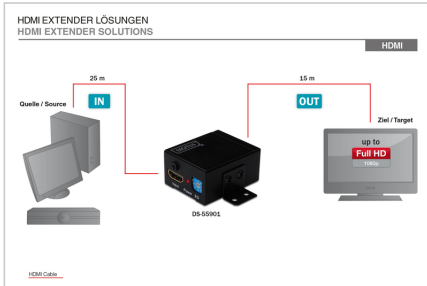

Safety notes

- If the device is powered by a plug-in power supply, ensure that the power adapter is connected correctly and meets the specified requirements (e.g. voltage and current).
- Only use certified CAT5e or CAT6 cables to ensure stable signal transmission.
- For particularly long cable runs or in environments prone to interference, it is recommended to use shielded network cables.
- Make sure that all connections are tight and secure to avoid loose contacts that could affect the signal quality. Make sure that the HDMI and Ethernet connections are connected correctly.
- Make sure that the CAT cable is not laid near high-voltage power lines or other strong sources of electromagnetic interference to avoid signal interference.
- Only operate the device within the specified temperature range.
- Do not use the device outdoors or in damp or wet environments
- Check all connections and cables regularly for wear or damage. Cables and connections can wear out, especially with frequent use or long installations, which can lead to poor signal quality or system failure.

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
 Auf dem Schüffel 3
 Lüdenscheid, Germany
<https://www.assmann.com>
info@assmann.com