

USB GaN Charger 67W, 2x USB-C, 1x USB-A

DA-10303
EAN 4016032505839



USB GaN Charger, 67W 2x USB-C, 1x USB-A, White

Pure power, cleverly packaged: With our 67 Watt GaN II Charger, you can charge your smartphone, tablet and laptop quickly and safely - with just one compact charger. Two USB-C ports deliver up to 67 watts each, the USB-A port up to 22.5 watts - perfect for supplying several devices with full power at the same time. Whether individually or combined: The intelligent power distribution ensures that your devices are always optimally charged. Thanks to modern GaN II technology (Gallium Nitride), the charger is particularly efficient, compact and durable. The housing made from 98% recycled PCR material (post consumer recycling) and the 100% plastic-free packaging protect the environment without compromising on quality or safety. Universally applicable for smartphones, tablets, laptops etc. - your new all-rounder for fast, sustainable and safe charging.

Powerful, compact, clever: The USB GaN II Charger 67W offers high-speed charging for smartphones, tablets and laptops for up to 3 devices simultaneously.

- Maximum power with single connection: USB-C1 max. 67W, USB-C2 max. 67W, USB-A max. 22.5W
- Multi-device charging (2 port) USB-C1 + USB-C2: 45W max. + 20W max.

- Multi-device charging (2 port) USB-C1 + USB-A: 45W + 18 W max.
- Multi-device charging (2 port) USB-C2 + USB-A: 10 W + 10 W max.
- Multi-device charging (3 port) USB-C1 + USB-C2 + USB-A: 40W + 10W + 10W max.
- GaN II technology (gallium nitride) for high efficiency, low heat generation and compact design
- Plastic housing made from 98% recycled PCR material
- Plastic-free packaging
- Protection against overcurrent, short circuits and overheating
- Input voltage/rated current/frequency: 110-240V / 2.0A / 50/60Hz
- Average active efficiency: 82.9
- Power consumption in standby: 0.27W
- Product color: White
- Dimensions: 3.15 x 10 x 3.6 cm
- Weight: 116 g



Attributes


- Style: Charger/Power supply
- Type: Notebook

Package contents

- USB charger
- Operating instructions

More images:

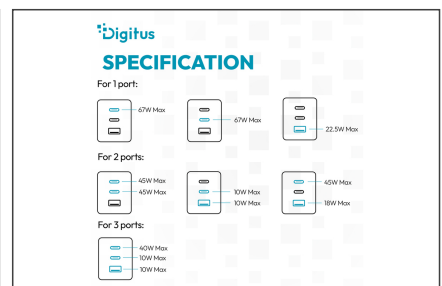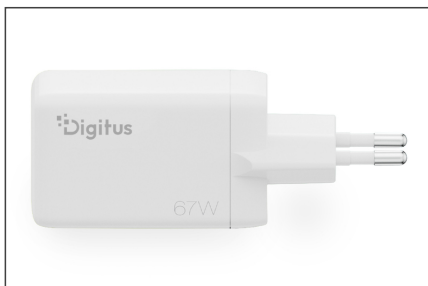

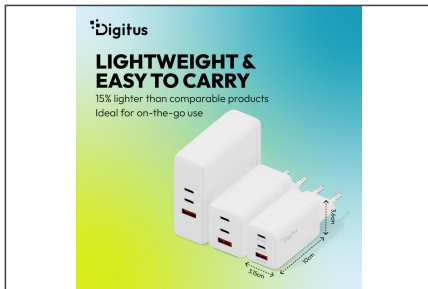

Safety notes

- Use charging adapters or power supply units in accordance with the instructions in the operating instructions to ensure optimum performance.
- Connect the charging adapter to an easily accessible socket in the voltage range between 100-240 V AC.
- Disconnect the charging adapter from the socket after use.
- Do not use the charging adapter with electronic devices that are outside the specifications of the charging adapter.
- Do not expose the device to rain, moisture, vapors or liquids.
- Do not insert any objects into the device.
- Do not attempt to repair the unit or open the housing without authorization. You risk an electric shock!
- Ensure adequate ventilation to prevent damage due to overheating.
- Dust, moisture, vapors and strong cleaning agents or solvents can cause damage to the device.
- Disconnect the appliance from the power supply and the connected devices before cleaning.
- Clean the device with a dust-free cloth.