

# DIGITUS® Modular Patch Panel, 24-port

DN-91410

EAN 4016032280781



## Modular Patch Panel, shielded 24-port, blank, 1U, rack mount, grey RAL 7035

The Modular Patch Panel from DIGITUS® is available as 16- or 24-port version. The 1.5 mm cold rolled c-steel provides the best storage of your Keystone Modules.

- Layout Keystone Entry: Straight
- Area of application: 483 mm (19") cabinet
- Norms: ISO/IEC 11801 3rd Ed., EN 50173-1, EIA/TIA 568-C
- General properties:
- Suitable for 483 mm (19") cabinet mounting
- Suitable for shielded Digitus® Keystone Modules and Couplers
- Central ground connection
- Technical properties:
- Housing material: 1.5 mm SPCC cold rolled steel sheet, powder-coated



- Material standard: EN 10 130(1991), BS 1449, NFA 36/401, DIN 1623, UNI 5866, UNE 36-086, SIS, JIS G 3141, ASTM, SAE, NFA 36/401
- Grounding bar material: Galvanized steel
- Physical properties:
- Operation temperature: -20° C to +70 °C (ISO/IEC 11801, EN 50173-1, ANSI/TIA/EIA 568 C)
- Operation temperature: -20° C to +70 °C (ISO/IEC 11801, EN 50173-1, ANSI/TIA/EIA 568 C)
- Colour: Grey RAL7035

### Attributes

- Color: light grey, RAL 7035
- Ports: 24
- Units: 1

| Logistics                    |              |             |            |            |             |           |
|------------------------------|--------------|-------------|------------|------------|-------------|-----------|
|                              | Number (pcs) | Weight (kg) | Depth (cm) | Width (cm) | Height (cm) | cm³       |
| Packaging Unit Carton        | 15           | 13.02       | 58.00      | 53.00      | 24.00       | 73,776.00 |
| Packaging Unit Inside        | 1            | 0.87        | 7.30       | 56.50      | 10.00       | 4,124.50  |
| Packaging Unit Single        | 1            | 0.87        | 7.30       | 56.50      | 10.00       | 4,124.50  |
| Net single without Packaging | 1            | 0.41        | 1.00       | 48.30      | 4.40        | 0.00      |

**More images:**

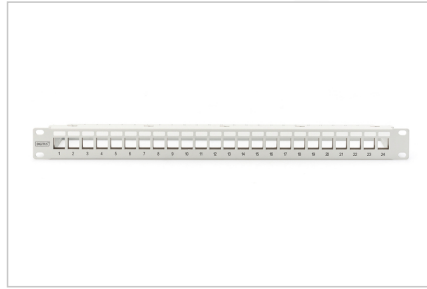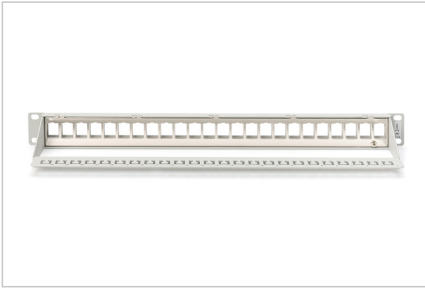

**Safety notes**

- Protect product from moisture
- Avoid antistatic charging when installing the product
- Observe the specifications of the raw cable manufacturer during installation

**EU responsible person**

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH  
Auf dem Schüffel 3  
Lüdenscheid, Germany  
<https://www.assmann.com>  
[info@assmann.com](mailto:info@assmann.com)