

Digitus® Modularni patch panel, 24 priključka

DN-91410

EAN 4016032280781



PANEL KEYSTONE 24-PORTNI 1U 19" DN-91410 Ral:7035- 24-port, blank, 1U, rack mount, grey RAL 7035

Modularni patch panel od DIGITUS®-a dostupan je u verzijama s 16 ili 24 porta. Hladno valjani čelik od ugljika debljine 1,5 mm pruža optimalnu potporu vašim keystone modulima.

- Dizajn Keystone nosača: ravan
- Područja primjene: razvodni ormar 483 mm (19")
- Standardi: ISO/IEC 11801 3. izd., EN 50173-1, EIA/TIA 568-C
- Opće karakteristike:
- Pogodno za montažu u ormar 483 mm (19")
- Pogodno za oklopljene Digitus® Keystone module i spojnice
- Središnja uzemljivačka veza
- Tehničke karakteristike:
- Materijal kućišta: 1,5 mm SPCC hladno valjani čelični lim, praškasti premaz

- Materijalni standard: EN 10 130(1991), BS 1449, NFA 36/401, DIN 1623, UNI 5866, UNE 36-086, SIS, JIS G 3141, ASTM, SAE, NFA 36/401
- Materijal uzemljivača: pocinčani čelik
- Fizička svojstva:
- Radna temperatura: -20 °C do +70 °C (ISO/IEC 11801, EN 50173-1, ANSI/TIA/EIA 568 C)
- Radna temperatura: -20 °C do +70 °C (ISO/IEC 11801, EN 50173-1, ANSI/TIA/EIA 568 C)
- Boja: Siva RAL7035


Attributes

- Boja: svijetlo siva, RAL 7035
- Jedinice: 1
- Priključci: 24

Logistics

	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	15	13.02	58.00	53.00	24.00	73,776.00
Packaging Unit Inside	1	0.87	7.30	56.50	10.00	4,124.50
Packaging Unit Single	1	0.87	7.30	56.50	10.00	4,124.50
Net single without Packaging	1	0.41	1.00	48.30	4.40	0.00

More images:

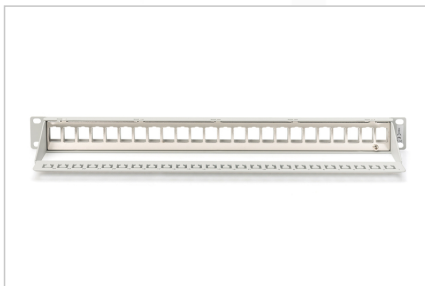

Safety notes

- Protect product from moisture

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
Auf dem Schöffel 3
Lüdenscheid, Germany
<https://www.assmann.com>
info@assmann.com