


# DIGITUS® M.2 NGFF / NVMe SSD PCI Express 3.0 (x4) Add-On Card

DS-33170

EAN 4016032464419

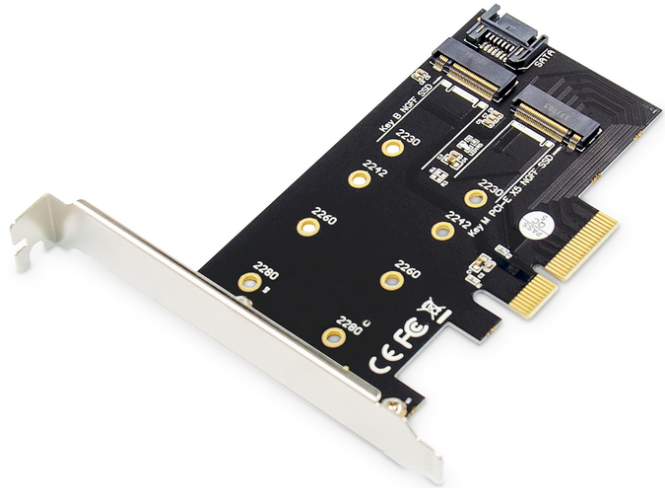

### M.2 NGFF/NVMe SSD PCIe add-on card supports B, M and B+M Key, size 80,60,42 and 30mm

This PCIe x4 adapter card is suitable for M.2 / NGFF storage media (NVMe) with B, M, B+M key and the dimensions 2230, 2242, 2260 & 2280. Together with the x4 interface and PCIe 3.0 standard, data transfers of up to 6 Gbps (32 GT/s) are possible. Storage media can either be connected via the integrated SATA interface for M.2 SATA SSDs, or via the PCI interface for NVMe PCIe SSDs. Go into turbo mode with the multi-functional M.2 PCIe 3.0 add-on card from DIGITUS®.

### Use M.2 NGFF/NVMe SSDs at PCIe x4 slots on the mainboard – B & M key

- Adapter Card for PCIe Slots x4/ x8/ x16
- Supports PCIe 3.0 (x4)
- Data transfer rate: up to 6Gbps (32GT/S)
- Supports NVMe Key B/M M.2 SSD including 2230, 2242, 2260 & 2280
- Hard disk sizes: 80, 60, 42 & 30 mm


- Supports M-Key M.2 SSD, B-Key and B+M Key M.2 SSD
- Bus type: PCIe 3.0 (complies with PCI express specification Rev. 3)
- SATA: 3.0 (complies with SATA specification Rev. 3)
- Backwards compatible with PCIe 2.0 and 1.0 mainboards
- Power supply via PCIe interface (3.3 V)
- Supported operating systems: Windows 10/8/8.1/Server 2012 R2/Linux/Ubuntu
- Dimensions: 11.4 x 7 x 2 cm (W x D x H)
- Weight: 41.2 g

### Package contents

- 1 x M.2 NGFF / NVMe SSD PCI Express 3.0 (x4) Add-On Card
- 1 x Low-profile slot bracket
- 1 x SATA cable
- 2 x fastening screws
- 1 x Screwdriver
- 1 x Quick reference guide

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm <sup>3</sup>
Packaging Unit Carton	40	5.82	38.00	28.00	30.00	31,920.00
Packaging Unit Inside	1	0.15	0.00	0.00	0.00	0.00
Packaging Unit Single	1	0.15	13.00	14.00	3.00	546.00
Net single without Packaging	1	0.10	13.00	14.00	3.00	546.00

**More images:**

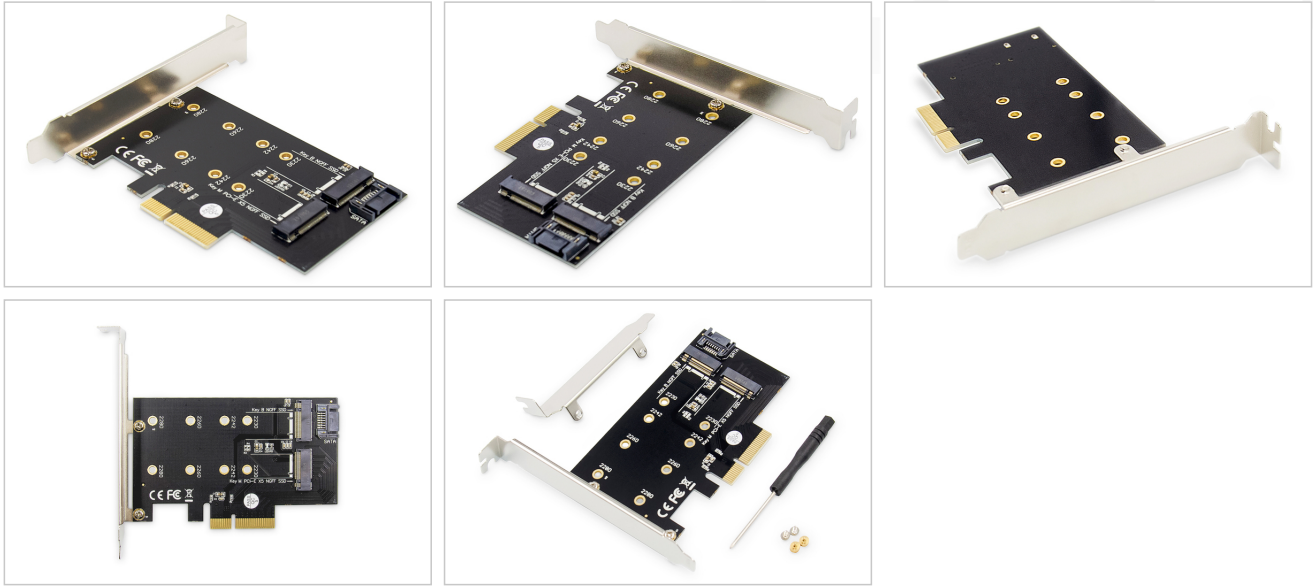

**Safety notes**

- Switch off the computer completely and disconnect it from the power supply before installing or removing the network card.
- Static discharge can damage the product or the PC. Take measures against static discharge (ESD) when installing the product, e.g. wear an antistatic wrist strap.
- Before installation, touch the metal surface of the PC housing or another grounded object to ground any ESD charge via the housing.
- Avoid using too much force when connecting the product to the PC.
- Please ensure that any cables are connected correctly without overstretching or damaging them.
- Avoid touching the contacts of the product with your fingers to prevent corrosion or static charge.

**EU responsible person**

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH  
Auf dem Schüffel 3  
Lüdenscheid, Germany  
<https://www.assmann.com>  
[info@assmann.com](mailto:info@assmann.com)