

# DIGITUS® USB-A connection cable, 1.8m

AK-300101-018-S

EAN 4016032282594



## USB 2.0 connection cable, type A M/M, 1.8m, USB 2.0 conform, bl

For connecting external USB end devices (with A socket) to the USB host (e.g. PC, notebook or USB hub). Transfer rate up to 480 Mbps (high-speed).

**Enables reliable and fast connection of external USB devices to the PC, even over longer distances.**

### Attributes



- Asortiman: USB kabele
- AWG: 28


- Feritni filter: nema
- Kabel u boji: crni
- Kapice: ukalupljeno
- Konektor 1: USB A, utikač
- Konektor 2: USB A, utikač
- Konektor u boji: crni
- Materijal žice: CU
- Površina konektora: poniklano
- USB sukladnost: USB 2,0
- Duljina: 1.8 m
- oklop: dvostruki oklop

## Logistics

|                              | Number (pcs) | Weight (kg) | Depth (cm) | Width (cm) | Height (cm) | cm <sup>3</sup> |
|------------------------------|--------------|-------------|------------|------------|-------------|-----------------|
| Packaging Unit Carton        | 300          | 14.80       | 35.00      | 31.00      | 44.00       | 47,740.00       |
| Packaging Unit Inside        | 10           | 0.49        | 1.00       | 16.00      | 19.00       | 304.00          |
| Packaging Unit Single        | 1            | 0.05        | 15.00      | 6.00       | 11.00       | 990.00          |
| Net single without Packaging | 1            | 0.04        | 10.50      | 11.00      | 1.50        | 0.00            |

## More images:

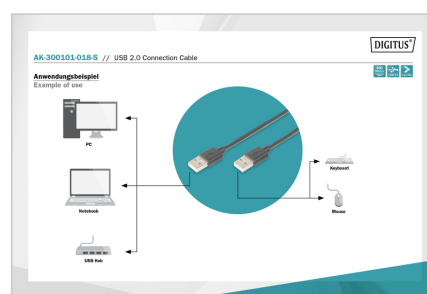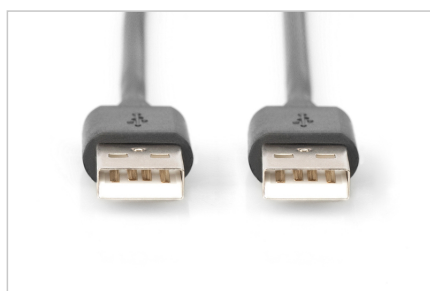

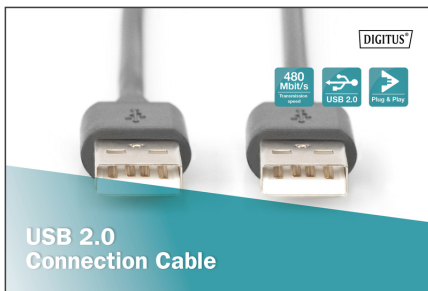

## Safety notes

- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Cables must not be kinked sharply or bent at tight angles, as this can damage the inner wires and lead to failures.
- Make sure that the cables are not under tensile load, as this can damage the insulation and the wires inside the cable.
- Ensure that cables are not laid in areas where they can be easily damaged mechanically.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately to avoid failures, short circuits or even electric shocks.

## EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH  
Auf dem Schüffel 3  
Lüdenscheid, Germany  
<https://www.assmann.com>  
[info@assmann.com](mailto:info@assmann.com)