

# DIGITUS® USB-A - USB-B connection cable, 1.8m

AK-300102-018-E  
EAN 4016032282624



**USB connection cable, type A - B M/M, 1.8m, USB 2.0 suitable, be**

For connecting external USB end devices (with B socket, e.g. external hard disk enclosures, scanners or printers) to the USB host (e.g. PC, notebook or USB hub). Transfer rate up to 480 Mbps (high-speed).

**Enables reliable and fast connection of external USB devices to the PC.**

**Attributes**


- Assortment: USB Cables

- Color cable: beige
- Color connector: beige
- Connector 1: USB A, plug
- Connector 2: USB B, plug
- Connector surface: nickel-plated
- Hoods: molded
- USB compliance: USB 2.0
- Length: 1.8 m

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	320	15.00	32.00	45.00	25.00	36,000.00
Packaging Unit Inside	10	0.47	21.00	2.50	21.50	1,128.75
Packaging Unit Single	1	0.05	8.50	1.50	10.00	127.50
Net single without Packaging	1	0.04	1.00	11.00	10.00	0.00

**More images:**



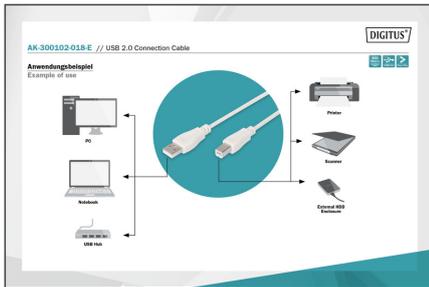

## Safety notes

- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Cables must not be kinked sharply or bent at tight angles, as this can damage the inner wires and lead to failures.
- Make sure that the cables are not under tensile load, as this can damage the insulation and the wires inside the cable.
- Ensure that cables are not laid in areas where they can be easily damaged mechanically.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately to avoid failures, short circuits or even electric shocks.

## EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH  
Auf dem Schüffel 3  
Lüdenscheid, Germany  
<https://www.assmann.com>  
[info@assmann.com](mailto:info@assmann.com)