

DIGITUS® Power strip with aluminum profile and switch, surge protection, built-in power filter, 6 UK-style outlets, 3-meter power cord with UK-style plug

DN-95461

EAN 4016032504009



1U PDU, 19" Switched Surge protected, Filter 6x Type UK outlets, 3M FLEX, UK PLUG

DIGITUS® power strips are the perfect solution for your network or server cabinet. When it comes to power distribution, the PDU meets the requirements of many applications in IT, networking, laboratories, and even home use. The power strip can be mounted in the 19" section of the cabinet in a space-saving 1U configuration. An integrated power filter and surge protection safeguard connected devices from power line disturbances. Depending on the cabinet type, the power strip can be mounted with the outlets facing either to the right or to the left.

Reliable and Professional Power Supply Solutions for 19" Network and Server Cabinets

- Illuminated switch—protected against accidental deactivation
- Built-in power filter
- Integrated surge protection: Nominal
- Discharge current (In) - 10 kA
- Housing: Aluminum
- Plastic components made of ABS UL-94V-0
- Input: UK plug

- Outlets: 6 UK-style outlets (Type G)
- Power cord: 3-meter cable
- Rated current: 13 A
- Rated voltage: 230–250 VAC, 50/60 Hz
- Mounting length: 465 mm
- Dimensions: 482.6 x 45 x 45 mm (H x W x D)

Attributes


- Additional Features: Power switch, Overvoltage protection, Line filter
- Current: 16 A
- Installation: Rack 1U
- Phase: 1ph
- Power: 3,6 kVA
- Volts: 230 V
- Inch form factor (IEC 60297): 482.6 mm (19")

Package contents

- What's Included: 1x power strip
- 2 mounting brackets
- 1 x Safety Notice

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	10	12.20	34.50	54.50	29.00	54,527.20
Packaging Unit Inside	1	1.22	0.00	0.00	0.00	0.00
Packaging Unit Single	1	1.22	7.00	14.50	54.40	5,521.60
Net single without Packaging	1	1.09	7.00	14.50	54.40	5,521.60

More images:

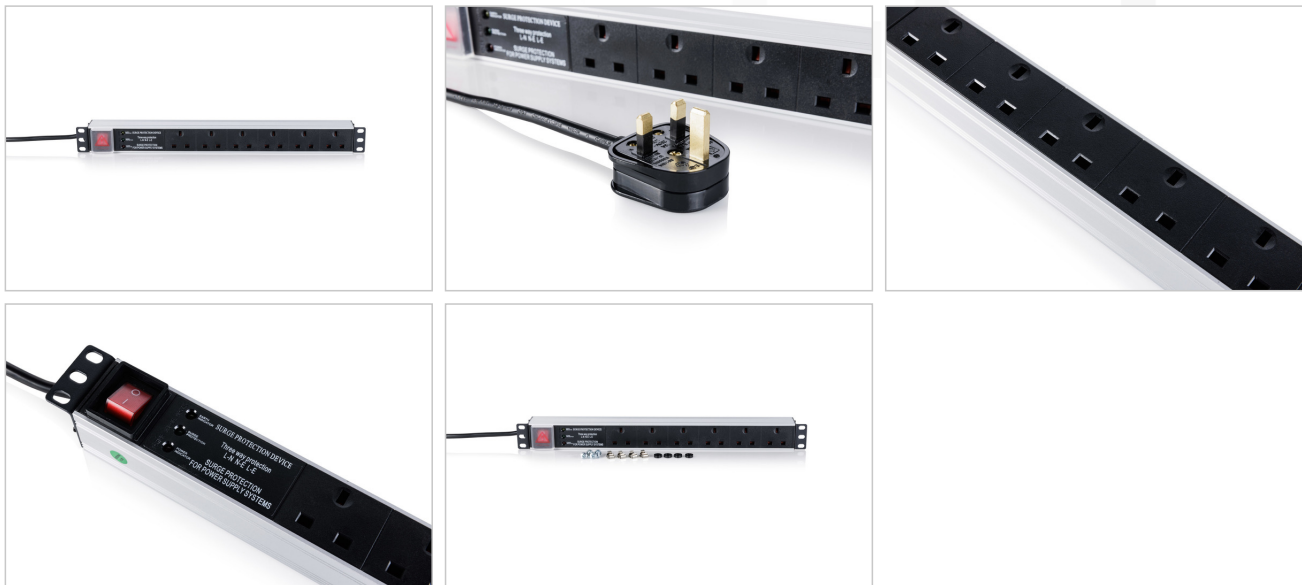

Safety notes

- This product is not intended for unsupervised use by children or persons under their care!
- Prevent higher humidity or temperatures than those specified in the data sheet - Avoid moisture, dust or vapors, solvents, flammable gases.
- Multiple sockets are not designed for permanent use with heavy loads!
- Multiple sockets must not be cascaded (avoid stringing together several multiple sockets).
- The maximum connected load must not be exceeded.
- Defective multiple sockets must be taken out of service immediately and disposed of in an environmentally friendly manner.
- In the event of a fault, take the product out of operation and contact a qualified electrician.
- Do not open the product.
- Disconnect the product from the power supply before cleaning. Do not use any aggressive or abrasive cleaning agents for cleaning.
- The ingress of liquids can lead to a short circuit.

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
Auf dem Schöffel 3
Lüdenscheid, Germany
<https://www.assmann.com>
info@assmann.com