

DIGITUS® Power strip with aluminum profile, switch, and surge protection; 12 UK-style outlets, surge protection, built-in power filter, IEC 60309 16 A plug, 1.8 m

DN-95465

EAN 4016032504047



PDU, with Switch, Surge Protection, Filter 12x UK Outlets, Vertical Mount, 16A Commando Plug

DIGITUS® power strips are the perfect solution for your network or server cabinet. When it comes to power distribution, the PDU meets the requirements of many applications in IT, networking, laboratories, and even home use. The power strip can be mounted vertically inside the cabinet. Surge protection safeguards connected devices from power surges. Depending on the cabinet type, the power strip can be mounted with the outlets facing either to the right or to the left.

Reliable and Professional Power Supply for Network and Server Cabinets

- Vertical Installation
- Backlit Switch
- Surge Protection Module Against Power Surges
- Surge Protection: Nominal Discharge Current (In) - 5 kA
- Housing: Aluminum
- Plastic components made of ABS UL-94V-0
- Input: IEC 60309 16 A plug
- Outlets: 12 UK-style outlets (Type G)

- Power cord: 1.8 m cable
- Rated current: 13 A
- Rated voltage: 230-250 VAC, 50/60 Hz
- Mounting length: 839.5 mm
- Dimensions: 860.5 x 45 x 45 mm (H x W x D)

Attributes


- Additional Features: Power switch, Overvoltage protection
- Current: 16 A
- Input Plug: IEC 60309 16A 1ph/N/PE 6h
- Installation: Rack 1U
- Phase: 1ph
- Power: 3,6 kVA
- Volts: 230 V
- Inch form factor (IEC 60297): 254 mm (10")

Package contents

- What's Included: 1x power strip
- 2 mounting brackets
- 1x Safety Instructions

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	4	3.06	29.00	101.00	16.00	46,864.00
Packaging Unit Inside	1	0.77	0.00	0.00	0.00	0.00
Packaging Unit Single	1	0.77	7.00	14.50	100.00	10,150.00
Net single without Packaging	1	0.44	7.00	14.50	100.00	10,150.00

More images:

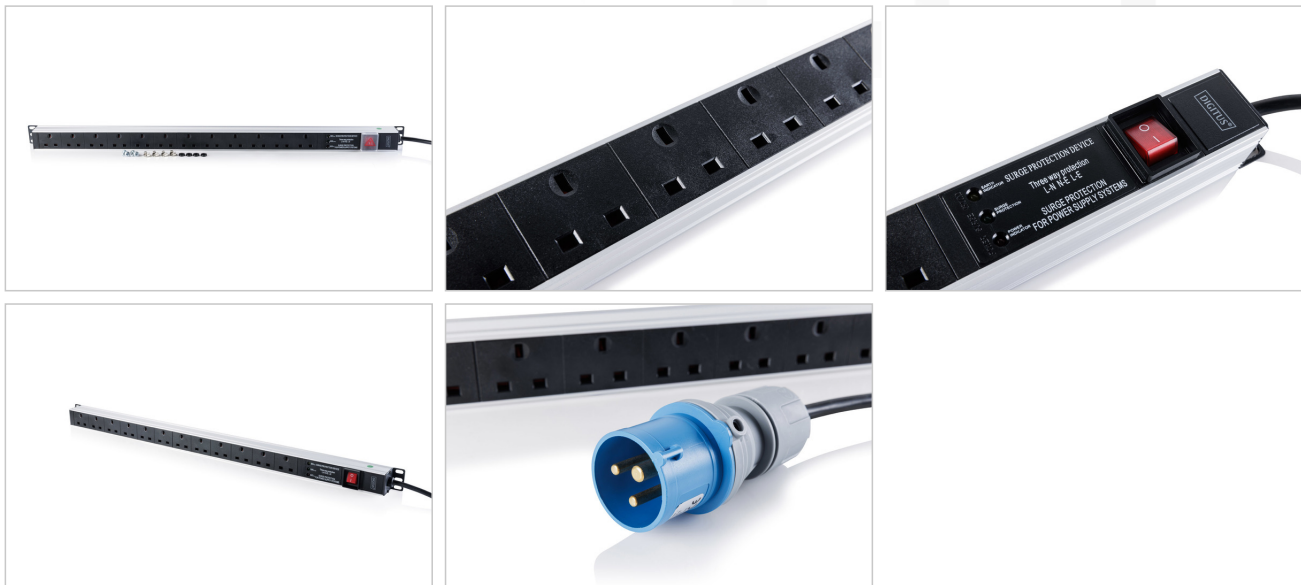

Safety notes

- This product is not intended for unsupervised use by children or persons under their care!
- Prevent higher humidity or temperatures than those specified in the data sheet - Avoid moisture, dust or vapors, solvents, flammable gases.
- Multiple sockets are not designed for permanent use with heavy loads!
- Multiple sockets must not be cascaded (avoid stringing together several multiple sockets).
- The maximum connected load must not be exceeded.
- Defective multiple sockets must be taken out of service immediately and disposed of in an environmentally friendly manner.
- In the event of a fault, take the product out of operation and contact a qualified electrician.
- Do not open the product.
- Disconnect the product from the power supply before cleaning. Do not use any aggressive or abrasive cleaning agents for cleaning.
- The ingress of liquids can lead to a short circuit.

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
Auf dem Schöffel 3
Lüdenscheid, Germany
<https://www.assmann.com>
info@assmann.com