

DIGITUS® Industrial power supply, 24 V DC, 5 A, 120 W, AC-DC, metal housing, for DIN rail mounting

DN-PWR-STD-12024

EAN 4016032508045



Industrial Power Supply 24V DC, 120W, metal case working Temperature -20-70C, DIN Rail

The DIGITUS® DN-PWR-STD-12024 power supply is the ideal power source for applications that require a reliable, efficient, and long-lasting power supply. With an output power of 120 watts and a constant output current of 5 amps, the unit delivers a stabilized 24-V DC voltage for a wide variety of industrial and electronic applications. The wide-range input voltage (90–264 V AC) enables universal use worldwide—whether in industrial control systems, building installations, or IT and IoT systems. The metal housing ensures excellent heat dissipation and high mechanical durability. Thanks to its compact design, the power supply can be easily mounted on a DIN rail (TS-35 / 7.5 & 15), saving valuable space in the control cabinet. The integrated protection system continuously monitors the operating status and protects connected loads from short circuits, overloads, overvoltage, and overtemperature. Automatic recovery after fault resolution enables uninterrupted continuous operation without manual intervention. Natural air convection ensures efficient cooling without a fan, guaranteeing silent, maintenance-free operation—ideal for environments where reliability and quiet operation are essential. With an efficiency of up to 89% and an adjustable output voltage (24–28 V), the DN-PWR-STD-12024 offers maximum flexibility and energy efficiency.

High-performance 120-W AC/DC power supply with a 24 V DC output voltage for industrial and control applications. Thanks to its rugged metal construction, wide input voltage range, and integrated protection system, it offers maximum reliability in continuous operation. Ideal for control cabinets, IoT systems, and automation technology.


- Output voltage: 24 V DC (adjustable from 24 to 28 V)
- Output current: 5 A
- Output power: 120 W
- Input voltage: 90–264 V AC, 47–63 Hz
- Efficiency: up to 89%
- Protection functions: Short circuit, overload, overvoltage, overtemperature
- Cooling: Natural air convection
- Mounting: DIN rail TS-35 / 7.5 & 15
- Case material: Metal
- Dimensions (H × W × D): 125 × 113 × 40 mm

Package contents

- Industrial Power Supply

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	20	12.50	30.00	31.50	30.00	28,350.00
Packaging Unit Inside	1	0.63	0.00	0.00	0.00	0.00
Packaging Unit Single	1	0.63	5.60	14.70	14.00	1,152.48
Net single without Packaging	1	0.55	5.60	14.70	14.00	1,152.48

More images:

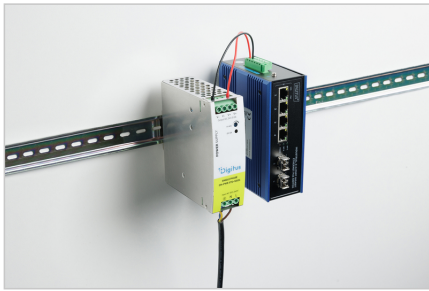

Digitus
INDUSTRIAL POWER SUPPLY UNIT
24 VDC | 5 A | 120 W

- WIDE INPUT VOLTAGE RANGE
- 120 Watt Output Power
- Short Circuit Protection
- Free Air Connection
- Overvoltage Protection

Digitus
RELIABLE PROTECTION FOR SAFE OPERATION
 120W output delivering stable 24V DC at 5A for diverse electronic systems

Digitus
DIN RAIL MOUNTABLE
 The power supply unit can be easily mounted on a DIN rail (TS-35 / 7.5 & 15)

Digitus
COMPACT DESIGN
 Saves space in the control cabinet while maintaining full functionality in a smaller footprint

Safety notes

- This product is intended for indoor use only.
- Read all instructions and follow all warnings and instructions on the device.
- Do not place this appliance on an unstable surface (such as a trolley, stand, table, etc.).
- Do not use this appliance near water.
- Do not place this appliance near or above a radiator.
- The housing is equipped with openings for heat dissipation and ventilation. To prevent overheating during operation, the ventilation openings must not be blocked or covered.
- Do not place the appliance on a soft surface (e.g. bed, sofa, blanket, etc.). This will block the ventilation.
- The appliance must not be installed in a closed environment if adequate ventilation is not guaranteed.
- Do not spray any liquids onto the appliance.
- Disconnect the mains plug before cleaning. Do not use any liquid or foam cleaners.
- Clean the appliance with a damp cloth.
- Connect the device according to the power supply on the rating plate.
- To prevent damage to the appliance, it is important that all appliances are properly earthed.
- Do not place any objects on the mains cable and lay it in such a way as to avoid tripping hazards.
- Use a surge protector, a regulator or an uninterruptible power supply (UPS) to protect your system from sudden, temporary and reduced power.
- Secure the system cable and mains cable properly and ensure that no objects are pressing on the cable.
- Do not insert any objects into the appliance through the openings in the housing. There is a risk of a short circuit, which can lead to fire or electric shock.
- Do not attempt to repair the appliance yourself. Always contact an authorized customer service centre.
- If any of the following conditions occur, unplug the appliance and send it to an authorized service centre for repair
- The mains cable, power supply unit or plug for the power supply is damaged or worn;
- Liquid has penetrated the appliance;
- The device has been exposed to rain or water;
- The device has been dropped or the housing has been damaged;
- The function of the device has obviously changed;
- The appliance cannot be operated as described in the operating instructions.

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
Auf dem Schüffel 3
Lüdenscheid, Germany
<https://www.assmann.com>
info@assmann.com